

4 3/4" x 4 3/4"



12" x 4 3/4"



4 3/4" x 4 3/4"



18" x 4 3/4"




4 3/4" x 4 3/4"



9 1/2" x 4 3/4"



4 3/4" x 4 3/4"



14 1/4" x 4 3/4"








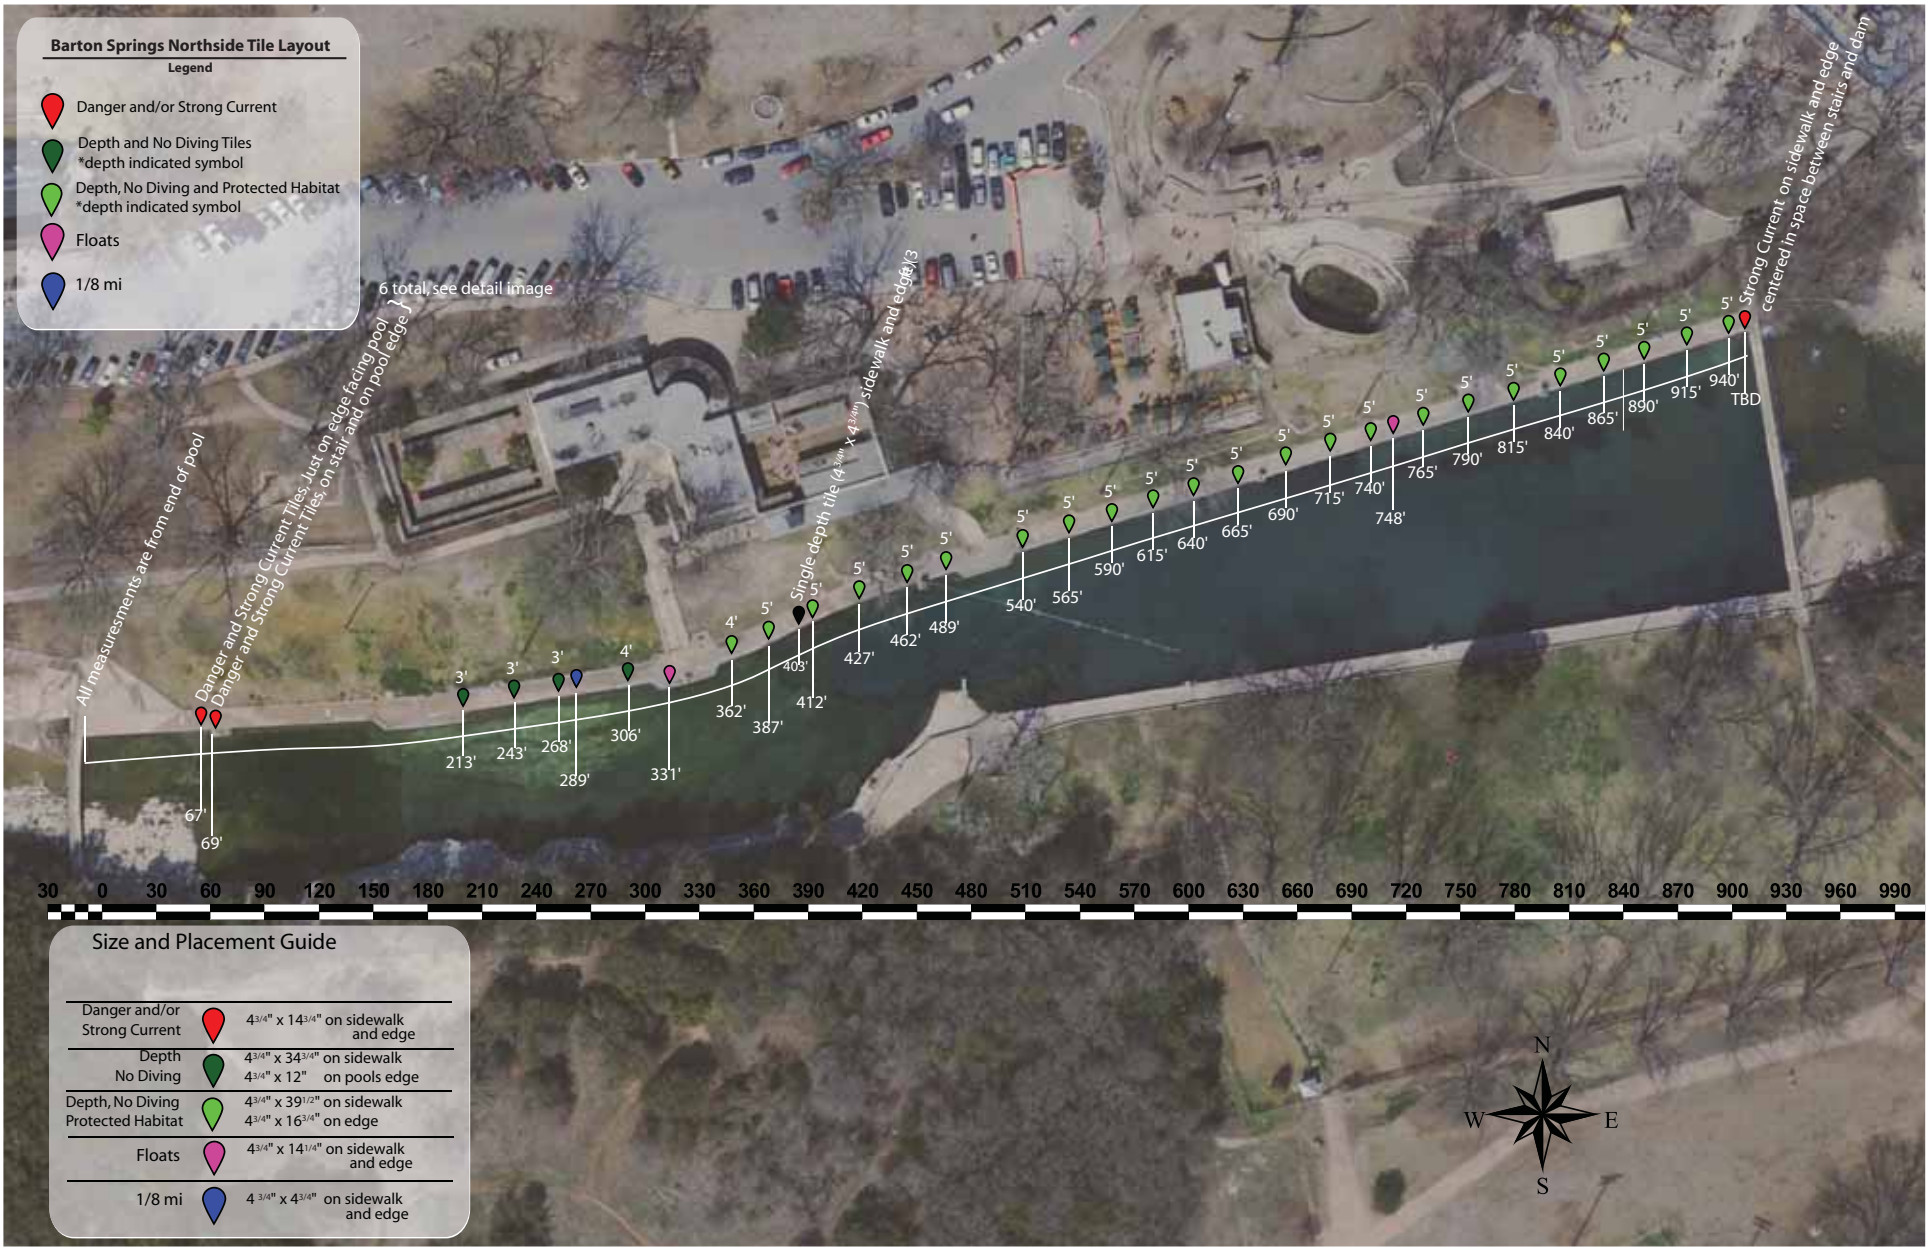
14 1/4" x 4 3/4"








Barton Springs Northside Tile Layout

Legend

-  Danger and/or Strong Current
-  Depth and No Diving Tiles
*depth indicated symbol
-  Depth, No Diving and Protected Habitat
*depth indicated symbol
-  Floats
-  1/8 mi



Size and Placement Guide

Danger and/or Strong Current		4 3/4" x 14 3/4" on sidewalk and edge
Depth No Diving		4 3/4" x 34 3/4" on sidewalk 4 3/4" x 12" on pools edge
Depth, No Diving Protected Habitat		4 3/4" x 39 1/2" on sidewalk 4 3/4" x 16 3/4" on edge
Floats		4 3/4" x 14 1/4" on sidewalk and edge
1/8 mi		4 3/4" x 4 3/4" on sidewalk and edge



Tile Placement and Installation Guide



Pools Edge

Centered on edge of pool,
repeated directly under matching
tile on sidewalk



Sidewalk

6" from pools edge




Notes

All tiles to be inset, final installation to be flush with surface of walkway or edge.
Depth of insert to be determined.

- Tiles on sidewalk installed 6 in. from the edge,
oriented to be read from the sidewalk
- Depth and protected habitat tile repeated on edge



Tile Placement and Installation Guide

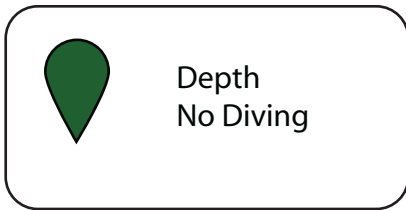

Depth
No Diving

Pools Edge

Centered on edge of pool,
repeated directly under matching
tile on sidewalk

12" x 4 3/4"



Sidewalk

6" from pools edge

12" x 4 3/4"

4 3/4" x 4 3/4"

18" x 4 3/4"



Notes

- Tiles should be installed 6 in from the edge, and oriented to be read from the sidewalk
- Depth tile repeated on edge so it can be read from within the pool



Tile Placement and Installation Guide



Danger
Strong Current

There are 2 locations indicated for installation of danger and/or strong current tiles. One of these locations is shown in the image to the right.

The other location is at the far East corner of the pool, it requires only a danger tile, on both the sidewalk and edge of the pool.

Where these tiles are installed on the sidewalk, they should be set 6" back from the edge of the pool.



Danger signs on overhangs


If overhangs for guardstands are maintained, Danger tiles should be installed on edge only

141/4" x 4 3/4"


DANGER

141/4" x 4 3/4"

STRONG CURRENT

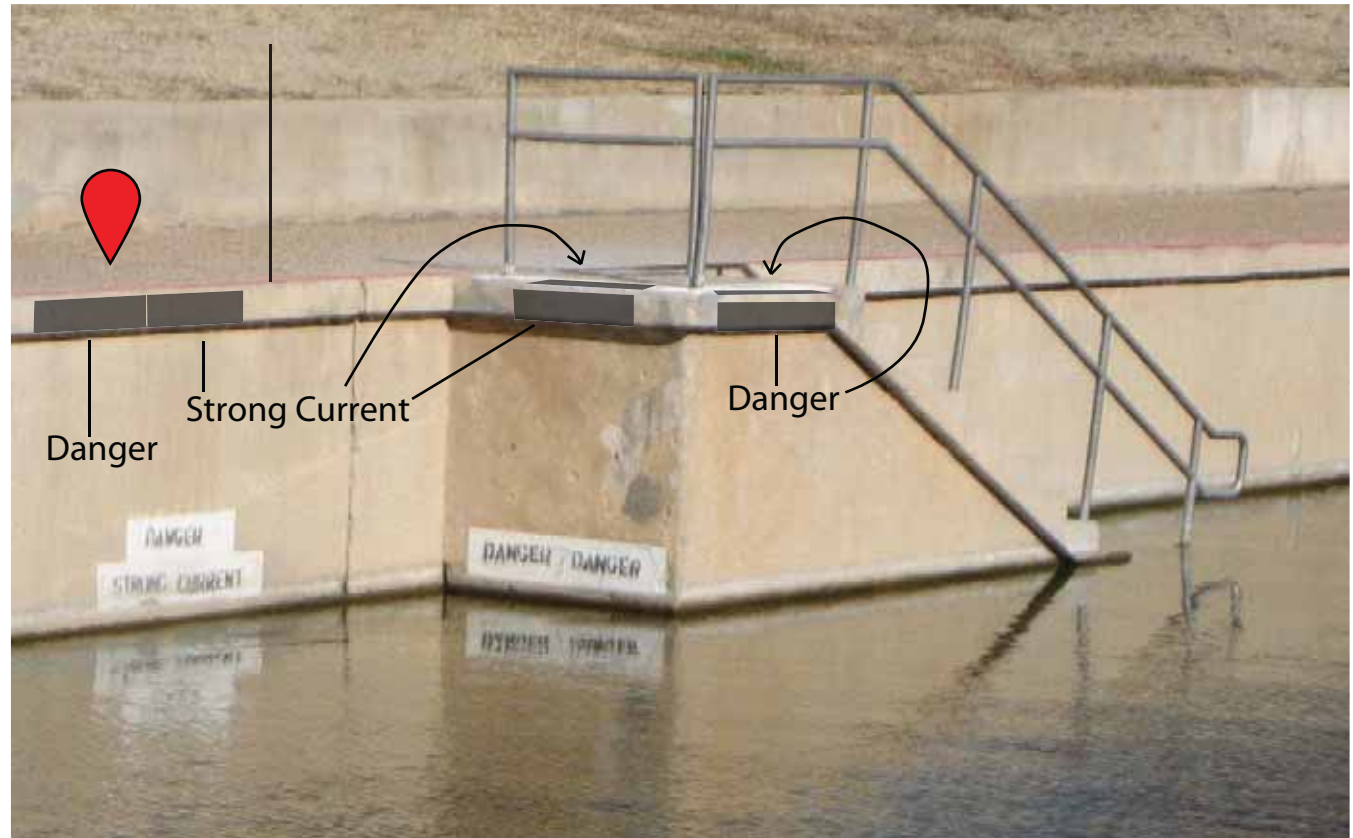

Tile Placement and Installation Guide

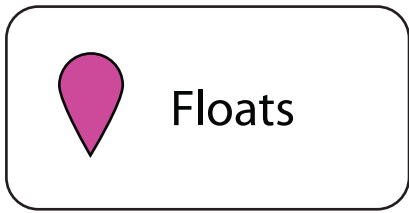

Centered on pools edge

Pools Edge



Sidewalk

6" from edge

9 1/2" x 4 3/4"

4 3/4" x 4 3/4"



Notes

These tiles mark the two areas of the pool where floats are allowed the arrow should be installed to point towards the designated float area

These tiles are to be installed on both the sidewalk and the pools edge

Tile Placement and Installation Guide



Centered on pools edge



Pools Edge

Sidewalk

6" from edge

4 3/4" x 4 3/4"



Notes

These tiles mark the 1/8 point in the pool. The arrow points east.
These tiles are to be installed on both the sidewalk and the pools edge