



## EXECUTIVE SUMMARY

### SOUND MITIGATION IN DOWNTOWN AREA

August 15, 2013

#### **City Council Resolution 20111215-060**

Directed staff to develop recommendations on improvements to the Land Development Code and Technical Codes to address sound mitigation for construction of new residential dwelling units and other uses with overnight guests, such as hotels, in the downtown area.

**Goal** - Create a reasonable guide for developers to reduce noise in the built environment.

- **Simple** - Create reasonable construction design standards.
- **Affordable** - Additional cost impact for development should not discourage future economical residential development.
- **Effective** - New sound mitigation requirements must improve the quality of life for occupants.

**Process** - The following issues are described in detail in this report.

- |  |         |
|--|---------|
| 1. Stakeholder Meetings – Concerns and Discussion.                             | Page 2  |
| 2. What laws are currently in place for Austin?                                | Page 3  |
| 3. Research and Public Policy Supporting Noise Reduction                       | Page 4  |
| 4. Issues Discussed with Stakeholders  |         |
| 1 <sup>st</sup> Proposal - Enhance interior wall assemblies for sleeping areas | Page 7  |
| Alternative Proposal - Adopt HUD Standards                                     | Page 12 |
| Final Proposal - Enhance exterior structural components                        | Page 13 |
| 5. Proposed Draft Ordinance  | Page 17 |
| 6. Board & Commission Summary  | Page 18 |
| 7. Stakeholder Statements  | Page 22 |

## **1. STAKEHOLDER MEETINGS – Sound Mitigation**

- Held 4 Stakeholder meetings

March 28, 2012

April 23, 2012

June 7, 2012

July 12, 2012

- The areas of concern and discussion:

1. Current regulations in the Land Development Code and exterior structural components in the Technical Codes?
2. The area on which this ordinance will be enforced?
3. Which measuring standard to use?  
(STC, OINIC, dBA, dBC)
4. Policy and noise information from other cities?
5. Possibility of adopting HUD Standards?
6. The cost impact for new development and affordable housing?
7. Possible Exemptions  
(facing away, interior bedroom layout, hotels, affordable housing)

## **2. WHAT LAWS ARE CURRENTLY IN PLACE FOR AUSTIN?**

### **CITY CODE**

#### **1) Austin Noise Ordinance - Chapter 9-2 Noise and Amplified Sound**

##### **§ 9-2-4 RESTRICTION ON DECIBEL LEVEL.**

A person may not operate sound equipment at a business that produces sound:

- (1) in excess of 85 decibels between 10:00 a.m. and 2:00 a.m., as measured at the property line of the business; or
- (2) is audible at the property line of the business between 2:00 a.m. and 10:00 a.m.

##### **§ 9-2-5 RESTRICTION ON USE OF SOUND EQUIPMENT IN A RESIDENTIAL AREA.**

- (A) This section applies to property zoned as residential under Section 25-2-32 (B) (*Zoning Districts and Map Codes*).
- (B) A person may not use sound equipment that produces sound audible beyond the property line of a residence in a residential area between 10:00 p.m. and 10:00 a.m.
- (C) A person may not use sound equipment audible beyond the property line of a residence in a residential area that produces sound in excess of 75 decibels.  
*Source: 1992 Code Section 10-5-5; Ord. 031023-13; Ord. 031211-11.*

### **LAND DEVELOPMENT CODE – TECHNICAL CODES**

- 1) **Austin adopted an airport overlay**, City Code Chapter 25-12, Article 1, Division 2. “Noise Reduction Measures For Certain Airport Compatible Land Uses”
  - Airport Overlay prescribes building requirements to achieve a minimum outdoor-to-indoor noise level reduction of 25 decibels and 30 decibels for exterior walls.
  - Provides specific construction requirements for exterior wall components.
- 2) **Austin adopted the 2009 International Building Code**
  - **Construction Design Standards, Section 1207 Sound Transmission:**
    - Provides requirements for air-borne sound and structure-borne sound mitigation.
    - Applies to interior walls, partitions and floor/ceiling assemblies between dwelling units and adjacent public areas such as halls, corridors, stairs or service areas that have a Sound Transmission Class (STC) of not less than 50 (45 if field tested).
    - However – there is no requirement for exterior wall assemblies.
    - This standard has been around since the 1960’s.
- 3) **Austin adopted the 2009 International Energy Code (Green Building)**
  - **Residential Group R projects in downtown Austin area**
  - Recent projects located in CBD and DMU areas with the installation of glass units consist of:
    - Low-e 1” thick assemblies with insulating glass.
    - ¼” glass- ½” airspace- ¼” glass.
    - Green Building techniques currently result in an average STC rating of 35 in downtown structures.

### **3. RESEARCH and PUBLIC POLICY SUPPORTING NOISE REDUCTION**

#### **What are other Cities and States doing to reduce noise?**

- a. General Noise Mitigation Plans – Majority of medium to large U.S. cities have implemented noise mitigation plans to reduce noise generated by airports and freeways.
- b. Most cities, such as New York, have developed inter-city specific plans to reduce noise generated by construction trucks and equipment, garbage trucks, and other noise disturbances. These plans generally control noise during certain hours of the day and measure with maximum decibels levels.
- c. A few cities have developed an entertainment type district where music is more prevalent due to numerous nightclubs and bars. However, very few cities have built residential high-rises within their entertainment district, such as Austin.
  - 1) New York - New York provides noise control guidelines for nightclubs, restaurants and bars, which includes acoustic product information, in order to control noise levels leaving their premises.
    - Commercial establishments may not to exceed 42 decibels as measured from inside nearby residences, and 7 decibels over the ambient sound level, as measured on a street or public right-of-way 15 feet or more from the source, between 10:00 pm and 7:00 am. (New York Noise Control Code, §24-231 Commercial Music, adopted in 2005).
  - 2) California - Adopted the California Environmental Quality Act (CEQA); and
    - Adopted the California Noise Insulation Standards (California Code, Title 24), which establishes an interior noise standard of 45 dBA for Multiple Unit Residential and Hotel/Motel structures. Acoustical studies must be prepared for proposed structures showing the ability to meet the guidelines for existing and future noise levels and demonstrates that the design of the building will reduce interior noise to 45 dBA.
  - 3) Portland - Adopted a goal of achieving not more than 45 dBA of sound in the interior of building and requires sound insulation in all new structures in certain zones in the city.
    - Portland also requires that this standard be met in remodeling projects that exceed 75% of the building value.
    - Portland also offers density bonuses for multifamily units using certain sound insulation techniques.
  - 4) Washington State – Washington State, as well as other cities, has adopted a matrix approach with “sending” and “receiving” areas, with decibel limits established for both the sound originator and the receiver.

For example, “commercial” as the source of noise, and “residential” as the receiver, the maximum decibel level is 57 dBA. These levels are all reduced by 10 decibels at night, which is 45 for residential.

SOURCE	RECEIVER		
	Residential	Commercial	Industrial
Residential	55	57	60
Commercial	57	60	65
Industrial	60	65	70

- 4) Denver - Denver also adopted a matrix approach, but also includes a maximum “surge” level.

SOURCE	RECEIVER					
	Residential		Commercial		Industrial	
	7am-10pm	10pm-7am	7am-10pm	10pm-7am	7am-10pm	10pm-7am
Denver (in dBA)						
Residential	55	50	65	60	80	75
Commercial	55	50	65	60	80	75
(Surge level)	(60)	(60)	-	-	-	-
Industrial	55	50	65	60	80	75
(Surge level)	(65)	(65)	-	-	-	-

- 5) San Francisco- In Jan. 2009 San Francisco supplemented their noise regulation, which uses the dBA scale, by adding the Decibel-C (dBC) scale to measure the lower frequency of noise. The ordinance has a limit of 8 dBC above ambient levels outside the entertainment venue.

**What Cities or states are using “Construction Design Standards”?**


- 1) California
  - Adopted the California State Building Code and requires “Construction Design Standards” to have a maximum interior noise received level at or below 45 dBA. (An engineering analysis is required).
  - California codes also discourage residential units in areas with ambient noise levels exceeding 65 dBA.
  
- 2) Portland
  - Adopted a similar standard to California with a maximum interior noise level of 45 dBA. Also require noise insulation in ALL new structures in certain zones, and remodel projects exceeding 75% of building value.

## 4. ISSUES DISCUSSED WITH STAKEHOLDERS

### 1<sup>st</sup> PROPOSAL - Enhance interior wall assemblies for sleeping areas.

#### A. Question: What Sound Transmission Standard(s) to use for interior sleeping units?

- a) **STC** (Sound Transmission Class) – is an integer rating of how well a building partition attenuates airborne sound. In the USA, it is widely used to rate interior partitions, ceilings/floors, doors, windows and exterior wall configurations (see [ASTM](#) International Classification E413 and E90). E90 is a lab test standard for attenuation through a wall configuration, which would confirm the STC rating prior to construction.

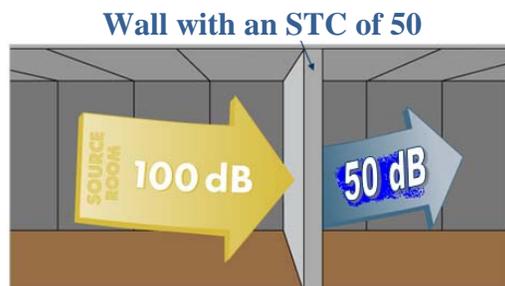

- b) **OINIC** (Outdoor to Inside Noise Isolation Class) An alternative measurement that can be field tested under the ASTM E966 standard, and used for traffic noise.
- c) **dB(A)** (Decibel) –Decibel means sound pressure level as measured by a sound level meter using the “A” weighting network and the slow meter response as specified by the American National Standards Institute. (City Code § 9-2-1 Definitions).

#### B. Question: What is involved in achieving an STC of 50?

##### 1) Adding Mass

The weight or thickness of a partition is the major factor in its ability to block sound. For example, a thick concrete wall will block more sound than a thin gypsum/2x4 wall. Mass is commonly added to existing walls by adding layers of mass loaded vinyl and or additional layers of gypsum. When the mass of a barrier is doubled, the isolation quality (or STC rating) increases by approximately 5 dBA, which is clearly noticeable. Base frequencies (40-250Hz range) require mass to effectively mitigate their effect. See Ratings chart below.

**Table 1 Glazing STC Ratings**

<b>Glazing System</b>	<b>STC Rating</b>
<i>Monolithic</i>	
1/8" thick solid glass	STC-30
1/4" thick solid glass	STC-31
1/2" thick solid glass	STC-36
<i>Laminated</i>	
1/4" laminated glass	STC-35
3/8" laminated glass	STC-36
1/2" laminated glass	STC-38
3/4" laminated glass	STC-41
<i>Insulating</i>	
1/8" glass - 1/4" air space - 1/8" glass	STC-28
1/8" glass - 3/8" air space - 1/8" glass	STC-31
1/4" glass - 1/2" air space - 1/4" glass	STC-35
1/4" glass - 1" air space - 1/4" glass	STC-37
1/4" glass - 4" air space - 3/16" glass *	STC-51

***Laminated Insulating***

1/4" laminated - 1/2" air space - 1/4" glass	STC-39
1/4" laminated - 1" air space - 3/16" glass	STC-42
1/4" laminated - 2" air space - 3/16" glass *	STC-45
1/4" laminated - 4" air space - 3/16" glass *	STC-48

***Double Laminated Insulating***

1/4" laminated - 1/2" air - 1/4" laminated	STC-42
1/4" laminated - 8" air - 1/4" laminated *	STC-49
1/2" laminated - 4" air - 1/4" laminated *	STC-51
1/2" laminated - 8" air - 1/4" laminated *	STC-56

\* perimeter lined with acoustical material

Published by JGL Acoustics, Inc. 1505D Bellevue Way N.E.

Bellevue, WA 98004 (206) 454-4823

## 2) Construction Techniques - Laminate

The weight or thickness of a partition is the major factor in its ability to block sound.

**Acoustical Performance of Glass and Wall Constructions**

	Overall Thickness	Inside	Construction Space	Outside	STC Value
<b>Laminated-Insulating Glass</b>	1" (26.1 mm)	1/4" laminate	1/2", Air	1/4"	39
	15/16" (24.6 mm)	1/4" laminate	1/2", Air	3/16"	39
	1-1/8" (29.3 mm)	3/8" laminate	1/2", Air	1/4"	40
	1-7/16" (37.3 mm)	1/4" laminate	1", Air	3/16"	42
	2-7/16" (62.7 mm)	1/4" laminate	2", Air	3/16"	45
	4-1/2" (113.5 mm)	1/4" laminate	4", Air	3/16"	48
	4-5/8" (119.1 mm)	1/2" laminate	4", Air	3/16"	49
	1" (27.9 mm)	1/4" laminate	1/2", Air	1/4" laminate	42
	4-3/4" (120.7 mm)	1/2" laminate	4", Air	1/4" laminate	51

Source:  Arch Aluminum & Glass Co., Inc.  
Your True Single Source®

**STC Ratings Chart**

## 3) Construction Techniques – Walls


**Increasing or Adding Air Space** within a partition can also help to increase sound isolation. The airspace can be increased or added to an existing partition. A common way to add an airspace is with resilient channels and a layer of gypsum. An airspace of 1 ½" will improve the STC by approximately 3 dB. An air space of 3" will improve the STC by approximately 6 dB. An airspace of 6" will improve the STC by approximately 8 dB.

**Adding Sound Absorptive Material in the Partition** can be installed inside of a partition's air space to further increase its STC rating. Installing insulation within a wall or floor/ceiling cavity will improve the STC rating by about 4-6 dB, which is clearly noticeable. It is important to note that often times, specialty insulations do not perform any better than standard batt insulation.

**Penetrations or openings in construction assemblies** for piping; electrical devices; recessed cabinets; bathtubs; soffits; or heating, ventilating or exhaust ducts shall be sealed, lined, insulated or otherwise treated to maintain the required ratings.

STC-57

(Figure 20)

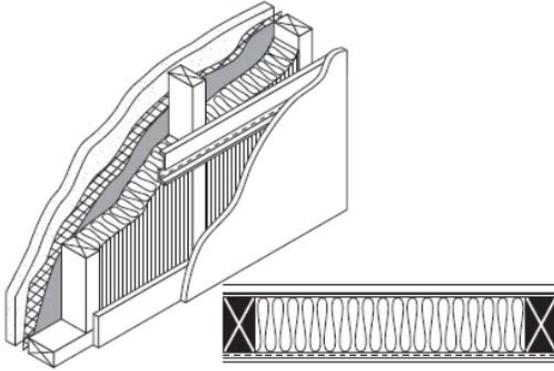


Exterior 5/8" stucco, 1" woven mesh and no.15 felt paper and, 2x4 studs, 16" o.c., resilient channel, 1/2" gypsum board, one thickness (3 1/2" - 4") fiber glass batt insulation.

Fire Rating - NR

Variation	Construction	STC	Fire Rating
20A	No insulation	49	NR
20B	No resilient channel (3 1/2" - 4") fiber glass batt	46	NR

STC-58

(Figure 21)

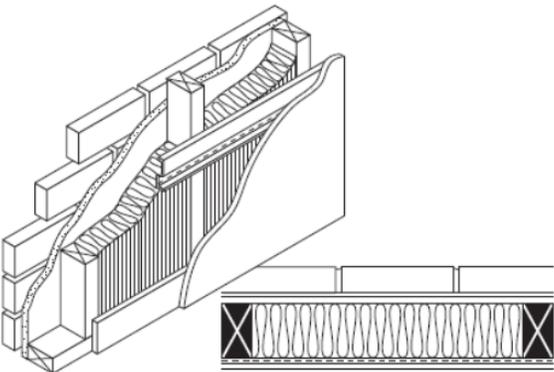

Exterior brick veneer, 1/2" air space, 3/4" insulative sheathing, 2x4 studs, 16" o.c., resilient channel, 1/2" gypsum board, one thickness (3 1/2" - 4") fiber glass batt insulation.

Fire Rating - NR

Variation	Construction	STC	Fire Rating
21A	No insulation	54	NR
21B	No resilient channel (3 1/2" - 4") fiber glass batt	56	NR

Source:



5. **How will the exterior wall be inspected?** Exterior wall assemblies must be inspected by an approved third party to verify compliance with the STC rating submitted with the construction documents and design. A final letter of approval by a professional certified by INCE (Institute of Noise Control Engineering) or a member in good standing of NCAC (National Council of Acoustical Consultants) must be submitted prior to Final Building Inspection.

### **C. Question: Should the City consider designating a geographical area?**

The Music Office proposed creation of a Downtown Entertainment District that would be defined as the geographic radius around the five music districts as an area of four city blocks (1500 feet). These five districts include East 6<sup>th</sup> St. and the Warehouse Entertainment districts, in addition to Rainey St., W. 6<sup>th</sup> St. and the Red River Music Heritage district. The Downtown Entertainment District will be within the CBD and the DMU.

### **D. Possible Exemptions:**

Configuration – *Some residential structures could be exempted based on configuration relative to the sound source.*

1. Residential Group R structures that are shielded from the sound source with façade(s) that face away the sound source (Downtown Entertainment District).
2. Residential Group R structures configured with sleeping units(s) to the interior of the residence and protected from the noise source by interior and exterior walls.
3. Residential Group R structures that include a component of Smart Housing must comply with HUD standards. (HUD requires a lower decibel level at 65dcb than currently allowed in Austin.)

### **E. Cost Impacts**

- 1) Design buildings where residential sleeping areas are not impacted by façade orientations.
  - *Minimal cost impact that will include some initial design change considerations.*
- 2) Building façade orientations are located such that interior sleeping areas are impacted by noise.
  - *Cost impacts include enhanced construction techniques for noise reduction.*
  - *Possible requirement of Engineer's letter submitted with building plans confirming compliance.*
  - *Possible requirement of 3<sup>rd</sup> Party Acoustical Test submitted before Final Inspection.*

## **ALTERNATE PROPOSAL – Adopt the HUD Standards.**

### **HUD Standards – 24 CFR Part 51 Environmental Criteria and Standards, SubPart B**

The Housing and Urban Development Department (HUD) provides a minimum national standard for noise reduction for communities. <http://www.hud.gov/>

Sec. 51.101 General policy.

a. It is HUD's general policy to provide minimum national standards applicable to HUD programs to protect citizens against excessive noise in their communities and places of residence.

1. Planning assistance. HUD requires that grantees give adequate consideration to noise exposures and sources of noise as an integral part of the urban environment when HUD assistance is provided for planning purposes, as follows:
  - i. Particular emphasis shall be placed on the importance of compatible land use planning in relation to airports, highways and other sources of high noise.
  - ii. Applicants shall take into consideration HUD environmental standards impacting the use of land.

Subpart B – Noise Abatement and Control (attached as addendum)

Sec. 51.100 Purpose and authority.

a. It is the purpose of this subpart B to:

1. Call attention to the threat of noise pollution;
2. Encourage the control of noise at its source in cooperation with other Federal departments and agencies;
3. Encourage land use patterns for housing and other noise sensitive urban needs that will provide a suitable separation between them and major noise sources;
4. Generally prohibit HUD support for new construction of noise sensitive uses on sites having unacceptable noise exposure;
5. Provide policy on the use of structural and other noise attenuation measures where needed; and
6. Provide policy to guide implementation of various HUD programs.

**Impact on Austin** – The HUD Policy has a limitation of 65 dBA. Since Austin's noise ordinance allows up to 85 dBA, then any HUD construction would not qualify. Therefore, staff does not recommend adopting the HUD Standards.

# **FINAL PROPOSAL – Enhance exterior structural components.**

## **LAMINATED GLASS REQUIREMENT**

Although the current Council resolution does not include buildings outside of the general downtown area, staff is suggesting that all structures built in this jurisdiction comply with these requirements for the future development of Austin as buildings over five stories in height continue to be developed downtown and outside of the downtown area.

The new proposed code amendment mandates laminated glass. This code amendment will affect future projects more than five stories above grade. It will meet all requirements of the resolution at varying degrees, plus adds the needed protection of glass breakage and potential falling glass from buildings with glass windows and glass balcony panels. This requirement will only be pertinent to buildings above five stories, and built in accordance with the 2012 International Building Code as proposed. The City of Austin is currently under the 2009 International Building Code.

The code amendment proposal also addresses the following requirements:


- Provides additional sound mitigation more stringent than the current code.
- Provides additional needed safety factor from possible breakage of glass at higher levels than five stories.
- Will not impact Smart Housing projects.
- Eliminates the cost of additional engineering not currently required.
- Eliminates the need for the cost of additional third party inspections not currently required.
- Creates equitability for all structures built in Austin’s jurisdiction above five stories.

During the first 3 stakeholder meetings there were many concerns expressed by downtown business owners, developers, and organizations. Those issues and concerns that were discussed repeatedly included cost, equitability, and affordability. Staff believes this recommendation addresses those issues and concerns. The solution provides additional noise control from outside sources into the built environment.

## **THE FOLLOWING QUESTIONS WERE RESEARCHED FOR THIS PROPOSAL.**

1. What is the effective sound transference level between safety glass and laminated glass?
  - a. Laminated architectural glass is an effective barrier to unwanted noise.
  - b. The ability of laminated architectural glass to reduce sound energy is referred to as the Sound Transmission Loss (STL). It is expressed in decibels (dB) and measured at specific frequencies, ranging from 80 to 5,000 Hz. STL is dependent on the mass, stiffness, and damping characteristics of a glazing material. While it is not practical to increase glass stiffness, it is possible to increase glass and interlayer thickness to improve STL performance.
  - c. Generally, laminated architectural glass (2-ply or 3-ply) reduces sound transmission over a wide frequency range depending on glass and interlayer thickness.

- d. Laminated glass in an insulating glass configuration can reduce sound transmission more dramatically and over a much wider frequency range depending on glass and air space thickness.
- e. We have included a graph comparing the STL of 1 inch insulating glass and 1/2 inch monolithic glass. All three glass configurations have approximately the same surface weight but the double laminated configuration provides significantly higher sound transmission loss.

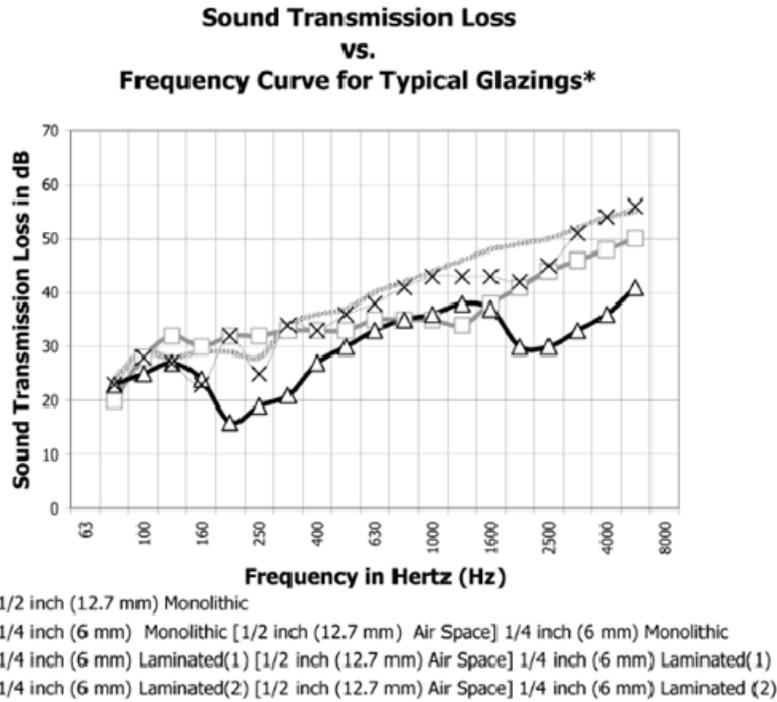

\*Information provided by Solutia Inc. The data and information set forth are based on samples tested and are not guaranteed for all samples or applications.


- (1) 1/8 inch glass - 0.030 inch Standard PVB - 1/8 inch glass  
(3 mm glass - 0.76 mm Standard PVB - 3 mm glass)
- (2) 1/8 inch glass - 0.030 inch Acoustic PVB - 1/8 inch glass  
(3 mm glass - 0.76 mm Acoustic PVB - 3 mm glass)



- f. The following diagrams indicate how laminated glass assemblies improve the STC rating.

Safety Glass can have a STC rating of 35 using  
1/4" Glass - 1/2" Air Space - 1/4" Glass

Laminated safety glass can have a STC rating of 42 using  
 $\frac{1}{4}$ " Lam. Glass –  $\frac{1}{2}$ " Air Space –  $\frac{1}{4}$ " Lam. Glass.

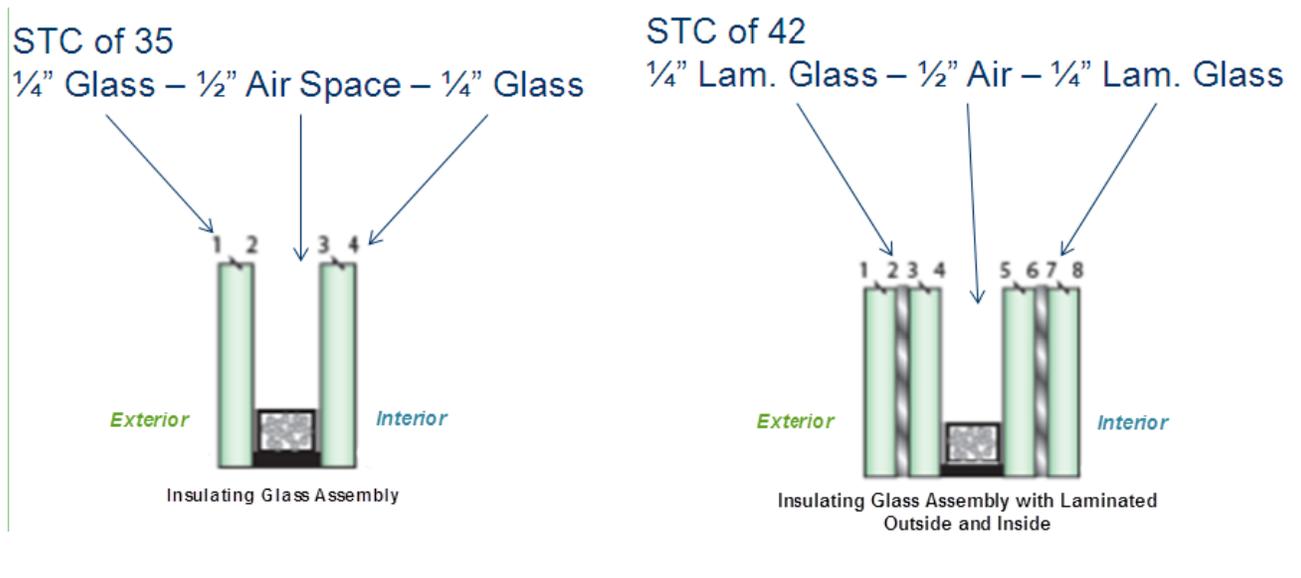

g. In exterior applications, acoustical performance is determined by testing in accordance of ASTM E 1425 *Practice for Determining the Acoustical Performance of Exterior Windows and Doors* and classified according to ASTM E 1332 *Standard Classification for Determination of Outdoor-Indoor Transmission Class (OITC)*. Laminated glass and insulating glass tend to produce higher OITC ratings because the laminate dampens vibration and the air space limits sound transmission.

2. What are the safety advantages of laminated glass over safety glass?
  - a. Laminated glass resists glass fall-out from windborne projectiles.
  - b. Laminated glass can provide retention of the glass if broken and therefore allow replacement for the glazing when convenient while possibly eliminating the potential of people and objects falling through the broken area.
  - c. Laminated architectural glass can provide various levels of security protection, including protection from break-ins, blast resistance, seismic resistance and bullet resistance.
  
3. What is the U-value and SHGC (Solar Heat Gain Coefficient) of laminated glass over safety glass?
  - a. Laminated glass can reduce solar energy transmission, control glare, and screen out ultraviolet (UV) light. In the Austin area, this is required by the Energy Code, so the lower the SHGC of the glass the better performance. By using a tinted interlayer, tinted or coated glass/glazing, solar transmission will be reduced without increasing nominal glazing thickness. Laminated architectural glass can be combined into insulating units for greater thermal performance.

4. Provide cost information of a general cost comparison between safety glass and laminated glass.

According to RSMeans Building Construction Cost Data, the in-place costs for different types of glass vary quite a bit and are as follows (national averages):

- Float glass (untempered): \$12 to \$64 per square foot
- Float glass (tempered): \$14 to \$70 per square foot
- Laminated glass: \$23 to \$211 per square foot
- Wired glass: \$22 to \$30 per square foot
- Coated glass: \$15 to \$80 per square foot
- Mirrors: \$17 to \$27 per square foot

Source: <http://www.reedconstructiondata.com/rsmeans/articles/glass-overview-and-cost-considerations/>

5. Laminated glass can eliminate (or significantly reduce) falling glass from high rises.

- June 2012 Ontario – Residential high-rise windows.
- March 2012 Calgary – Downtown Apartment high-rise windows.
- October 2011 Austin - Austonian high-rise condominiums windows.
- October 2011 Chicago – Loyola University high-rise windows.
- September 2011 Seattle –Four Seasons Hotel 18<sup>th</sup> floor windows.
- August 2011 Sarasota – Office building high-rise windows.
- August 2011 Toronto – Murano Tower high-rise condo balcony panels.
- June 2011 Austin - W Austin Hotel & Residence balcony panels.
- May 2011 Atlanta – W Hotel woman fell through a 10 story window.
- October 2007 Brisbane – Waterfront Place high-rise 23<sup>rd</sup> floor windows.
- August 2004 Chicago – Apartment high-rise, window washer broke windows.
- May 1988 Los Angeles – 62 story Interstate Bank Building (towering inferno).
- August 1983 Houston – High winds break high-rise windows.

In 2010-2011 Canada experienced 30 incidents of breaking windows and balcony panels, with 11 incidents occurring in Toronto.

Laminated glass video available: <http://www.youtube.com/watch?v=qbIZjJ-7yYQ>.

6. Impacts.

- There is no impact to affordable housing. Only applies to buildings above 5 stories.

## **5. PROPOSED DRAFT ORDINANCE**

**PART 1.** A new Section 2410 is added to § **25-12-1** of the Local Amendments of the Building Code to read:

### ***ARTICLE 1. BUILDING CODE.***

#### **§ 25-12-1 Section 2410, Glazing on Group R buildings above 5 stories in height.**

**2410.1 Glazing on Group R buildings above 5 stories in height.** Glazing exposed to the exterior and used as part of a curtain wall assembly, window and/or guardrail located on buildings that are over 5 stories in height must be laminated with two or more glass plies of equal thickness and the same glass type on all floors where Group R occupancies are located. Laminated glass shall comply with Category II of CPSC 16 CFR Part 1201 or Class A of ANSI Z97.1.

**Section 2410.2 Loads.** The panels shall be designed to withstand the loads and comply with the requirements of Section 2404 (*WIND, SNOW, SEISMIC AND DEAD LOADS ON GLASS*).

**PART 2.** Effective Date: \_\_\_\_\_, 20xx

## 6. BOARD & COMMISSION SUMMARY

### Building & Fire Code Board of Appeals

- January 25, 2012 – Preliminary discussion only on various solutions.

### Music Commission

- May 10, 2012 - Preliminary discussion on noise mitigation in downtown area.
- August 6, 2012 – Commission supported staff recommendation by unanimous vote 6-0.

Recommendation:

“Spearman moved for the Music Commission to support the recommendation from the building standards staff as it moves through the boards and commissions process so that other boards and commissions see that building standards have the support of the Music Commission. Spies concur, adding that the STC, safety and energy concerns are sufficient enough for support. Wagner seconds, motion passes unanimously, 6-0”.

### Design Commission

- August 27, 2012 - Commission recommendation below:

August 27, 2012

Dear Mayor Leffingwell, Mayor Pro-Tem Cole, and City Council Members,

We have reviewed the recommendations by Staff regarding sound mitigation for Downtown regarding music venues. The study is in the right direction, however, the single detail solution at the sound reception end only begins to touch upon the greater problem and solutions. There are two parts to the solution...the *source* and the *reception*. Both parts need be considered and recommendations to both need to be made. To begin, both sides need to agree upon an acceptable public noise level at the property lines. Performance detailing can then be created to achieve it.

Mitigation of the sound at the source would benefit the current and future residents of downtown. We begin by limiting decibels and sound frequency ranges at the property line to bring it down to that of other similar cities. We understand that simply turning down the volume may not be acceptable to some as it may alter the ambiance of the venues. For those, they can try to maintain the original volume and frequencies but mitigate its release thru design. Because recommendations at the receiving end entails considering construction detailing, it would not be out of line to ask the same of those at the sound source. A wealth of information, products and details are available to begin mitigating this and need to be considered...some at a greater fiscal cost than others. An effort needs to be made to study this. A venue recently came before us which began to incorporate this, so the principles are not new.

Mitigation of sound at the reception for future construction can be addressed in a multitude of ways. The building skin's articulation can begin to deflect and diffuse the sound and choice of materials can begin to absorb it. Because this is based upon configurations and choices, cost may not necessarily be more, especially if sound was further mitigated at the source. Besides the laminated glass recommended by Staff, a multitude of enhancements can be done in the wall assembly. Choice of studs, insulation type, additional caulking, stud configuration, and sound isolation glues are some of the typical standard details used to limit sound transfer. Final performance standards, however, should not alter the variety of character currently achievable by designers. By having sufficient available detailing options, this can be balanced.

For existing construction, besides mitigation at the source and retrofitting a laminated glass window, which is not fiscally realistic, there needs to be achievable retro-fit ideas available for those most sensitive to the noise. Most likely there will be a cost attributed to this, however each situation is different and acceptable levels differ per individual. Some retro-fit details include glass films, drapes, and adding a layer of isolated sheetrock with isolation glue. Recommendations need to be studied for this instance since it affects the current population which sparked the study.

We appreciate the opportunity to comment on this study, however, there is not enough information to provided support for the current proposal. Staff has done a fine job in the study, in bringing stakeholders together, and in bringing attention to the large problem at hand. Our commission is composed of professionals who have designed to deal with issues such as this and can be available to assist in further recommendations.

Sincerely,

James Shieh

Chair, Design Commission

### Downtown Commission

- September 19, 2012 Minutes:

**6. BRIEFING ON RECOMMENDATIONS ON IMPROVEMENTS TO THE LDC AND TECHNICAL CODES TO ADDRESS SOUND MITIGATION FOR CONSTRUCTION OF NEW RESIDENTIAL DWELLING UNITS AND OTHER USES WITH OVERNIGHT GUESTS, SUCH AS HOTELS, IN THE DOWNTOWN AUSTIN AREA.**

The Commission received a briefing from Leon Barba and Dan McNabb.

After a discussion, a motion to recommend the Council halt the process of amending the Land Development code and move towards more complete and nuanced solutions that have the lowest impact on downtown affordability, benefit existing downtown resident, and address lower frequencies, was approved on Commission Member Galligan's motion, Commission Member Sher's second, on a 9-0 vote, with Commission member Cady off the dais.

### Planning Commission

- October 9, 2012 Minutes: Briefing to the Planning Commission. No Action taken.

**1. Briefing:**

Request:

Briefing on recommendations on improvements to the Land Development Code and Technical codes to address sound mitigation for construction of new residential dwelling units and other uses with overnight guests, such as hotels, in the Downtown Austin area. (The Building & Fire Code Board will make final recommendation to City Council).

Staff:

Dan McNabb, 974-2752, dan.mcnabb@austintexas.gov  
Planning and Development Review Department

## **Building & Fire Code Board of Appeals**

February 7, 2013 Minutes:

**Noise Mitigation** – The Board held a public hearing on noise mitigation. Dan McNabb, PDRD, provided staff’s recommendation to require the use of laminated glass as a noise mitigation solution for Group R high-rises in Austin and to consider the noise code amendment separate from the 2012 IBC code adoption. Board Member Sullivan made a motion to not support staff’s recommendation and to not include the amendment in the 2012 IBC code amendment, second by Board Member Schumann and Michael Thorn-Leeson for a 2-3 vote. Board Members Haught and Cannatti voted against including the new amendment. The motion failed for lack of a majority vote.

- February 7, 2013 Statement from Frank Haught, Chair of the Building & Fire Code Board of Appeals:

The city manager has requested that the BFCBOA research various construction related options to reduce sound mitigation in new Residential buildings. Dan McNabb’s staff has undertaken this project on behalf of the BFCBOA and has research numerous options and has brought forth the one that appears the most efficient (short of presenting no plan at all).

The BFCBOA wished to move this proposal along to Council with the understanding that in our opinion it will not come close to resolving the noise mitigation issue but should be considered as part of a comprehensive plan. The BFCBOA acknowledges that changes to the source of the noise must also be part of a comprehensive plan. Finally, the BFCBOA wishes to disclose that it has also heard testimony that the proposal presented by staff will have very little effect in reducing low frequency noise mitigation.

Finally the BFCBOA, does not want this proposal to become part of the 2012 IBC (which is being considered under a separate agenda item) until such time Council has finalized a comprehensive plan that may or may not include recommendations from the proposal.

- February 7, 2013 Public Hearing Sign Up Sheet:

## PUBLIC SIGN IN SHEET

**BOARD NAME:** BUILDING AND FIRE CODE BOARD OF APPEALS

**DATE OF THE MEETING:** THURSDAY, FEBRUARY 7, 2013  
CITY HALL, 1<sup>ST</sup> FLOOR, B&C ROOM

	PRINTED NAME	* Contact Information (email, Phone #, etc)	Speaking at Citizen Communication
NOISE	Stuart Hersh	shersh@austin.tx.com 512-587-5093	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> AGAINST
NOISE	JOHN BURNHAM	JBurnham@cypress-advisors.com 512-466-0155	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> AGAINST
	Nancy Crowther	ncrowthor@austin.tx.com	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
	Harry Savio	Harry50@FBA.austin.tx.com 512/454-5588	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
	Michael Funk	AECB CoA	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
	Jesus Lardizabal	AMCPD <small>AUSTIN MAYORS COMMITTEE OF PEOPLE WITH DISABILITIES</small>	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
	Stephanie Thomas	stephanie.adapt@stcc.org 442-0252 <small>ADAPT</small>	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
NOISE	Charles Betts	381-6264 D.A.A.	Yes <input checked="" type="checkbox"/> No <input checked="" type="checkbox"/> AGAINST
	Jennifer McPhail	442-0252	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
NOISE	Mary Ingle	320 8449	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> AGAINST
NOISE	Bob Kaler	322 9641	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> AGAINST
	Rachel Fisher	323 0990	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
	Dolores Gonzalez	AMCPD	Yes <input type="checkbox"/> No <input type="checkbox"/>
NOISE	MICHAEL HSU	ARCHITECT HSU@HSUOFFICE.COM	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
	Dolores Gonzalez		Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
			Yes <input type="checkbox"/> No <input type="checkbox"/>
			Yes <input type="checkbox"/> No <input type="checkbox"/>

\*OPTIONAL

# STAKEHOLDER STATEMENTS

## Downtown Austin Alliance – Not Recommended. (see 10/29/12 letter).

DOWNTOWN AUSTIN ALLIANCE  
211 East 7th Street, Suite 818  
Austin, TX 78701  
512.469.1766

www.downtownaustin.com  
www.downtownaustintx.org



### OFFICERS

Pamela Power, Chair

Larry Graham, Vice Chair  
Texas Gas Service

Amy Shaw Thomas, Secretary  
University of Texas System  
Laura Gass, Treasurer

### BOARD OF DIRECTORS

Eddie Burns  
Austin American-Statesman  
Nancy Burns  
Norwood Tower

Mayor Pro Tem Sheryl Cole  
Austin City Council

Jerry Frey  
CB Richard Ellis

Cid Galindo  
The Galindo Group

Jude Galligan  
REMAX Downtown Austin

Allan Groen  
Wells Fargo Wealth Management

Greg Hartman  
Seton Family of Hospitals

Charles Heimsath  
Capitol Market Research

Carrie Holt  
AMLI Residential Properties Trust

Matt Hooks  
Ironwood Real Estate

Commissioner Karen Huber  
Travis County Commissioners Court

Marshall Jones  
The Wine & Food Foundation of Texas

Terry Koel  
Texas Facilities Commission

Michael Kennedy  
Commercial Texas, LLC

Sharon Kilmartin  
InterContinental Stephen F. Austin

Adam Nims  
Trammell Crow Company

Carol Polumbo  
McCall, Parkhurst & Horton LLP

Alex Pope  
Alex Pope Company

Jim Ritts  
Austin Theatre Alliance

Fred Schmidt  
Wild About Music

Joel Sher, Chair Emeritus  
Congress Holdings Group

Sania Shiffard  
Sania D. Shiffard, AIA, LEED AP

Andy Smith  
Thomas Properties Group

Tom Stacy  
T. Stacy & Associates

Mark Teeter  
Austin Convention Center

Michelo Van Hyfte  
Seton Family of Hospitals

Linda Watson  
Capital Metro

Daniel Woodroffe  
dwp

Charles Betts  
Executive Director

Preserving and Enhancing the Value  
and Vitality of Downtown Austin

October 29, 2012

City of Austin Building and Fire Code Board of Appeals:

As you know, many downtown stakeholders have been meeting with City staff over the past several months concerning a proposed building code amendment related to music or sounds that may interrupt the sleep of downtown residents and visitors. Based on our discussions, we suggest changing other Austin regulations that are more appropriate than changing the building code.

We appreciate the simplicity of the staff proposal, but because the data shows that the laminated glass solution is not very effective at mitigating lower (bass) frequencies, and because our City of Austin Sound Ordinance does not regulate bass-level frequencies, we do not believe that this proposal will truly mitigate sound in new construction.

Additionally, it will not help any of our existing 10,000 downtown residents or 6,000 nightly hotel guests.

We believe that sound ordinance regulations are a more appropriate area for change, rather than new construction building code standards for residential buildings, for several reasons:

1. We don't want to write regulations that make downtown residential and hotel development more difficult and cost prohibitive. The Downtown Austin Plan and Imagine Austin each call for more people living in downtown.
2. The City can be helpful in suggesting that new downtown projects implement sound mitigation measures. If the developers don't mitigate, they may suffer financially. For example, the Downtown Commission has begun asking questions about new downtown development that may have opportunities for appropriate sound mitigation.
3. We may be measuring sound and noise in a way that prevents us from mitigating impacts on residents and guests, and this might require a different regulatory approach.
4. There may be ways to regulate live music differently than recorded music that could promote our live music goals.

Thank you for the opportunity to speak to you about our concerns last week. When you vote on this proposal, please consider the cost impact of the proposal, whether it will be effective at mitigating sound, and our existing residents and visitors who are affected by not limiting bass frequencies in our current Sound Ordinance.

Sincerely,

Pamela Power, Chair

**RECA (Real Estate Council of Austin)** – Not recommended by RECA. (see 12/19/12 letter).



December 19, 2012

City of Austin Building and Fire Code Board of Appeals  
Austin City Hall  
301 W. 2<sup>nd</sup> Street  
Austin, TX 78701

Dear Board Members,

Downtown stakeholders, including The Real Estate Council of Austin (RECA), have been meeting over the last several months in response to the Austin City Council resolution regarding sound mitigation. As you know, Downtown music and related noise have given rise to complaints of disruption and interrupted sleep from residents and hotel guests. RECA wishes to share with you feedback regarding the proposed sound mitigation ordinance as presented to several boards and commissions, including this body, throughout fall 2012:

A new Section 2410 is added to **§ 25-12-3** of the Local Amendments of the Building Code to read:

**ARTICLE 1. BUILDING CODE.**  
**§ 25-12-3 Section 2410, LOCAL AMENDMENTS TO THE BUILDING CODE.**

**2410.1 Glazing located above 5 stories in height.** Glazing exposed to the exterior and used as part of a curtain wall assembly, window and/or guardrail located over 5 stories in height from surrounding grade must be laminated with two or more glass plies of equal thickness and the same glass type. Laminated glass shall comply with Category II of CPSC 16 CFR Part 1201 or Class A of ANSI Z97.1.

**2410.1.1 Loads.** The panels shall be designed to withstand the loads and comply with the requirements of Section 2404 (*WIND, SNOW, SEISMIC AND DEAD LOADS ON GLASS*).

**RECA advocates that the code amendment process be halted.** The sound problem, serious though it is, can be adequately addressed through the existing noise ordinance and other avenues. It is not necessary to change the building code, as is currently recommended by City staff, or to amend the land development code. Market forces will continue to compel developers to mitigate sound; it is in the developers' interest to make adjustments, such as possibly using laminated glass as is currently recommended, for the financial viability of their projects. Additional code

regulation will make development in Downtown Austin more challenging than it already is, thus thwarting the goal of increased density and livability as described in the Imagine Austin Comprehensive Plan for this part of Austin.

**RECA advocates for a balanced approach to mitigating sound disturbance that addresses the sound source as well as the receiving space.** That being said, RECA is committed to live music in Austin, Texas, as demonstrated by our organization's and members' philanthropy and community involvement. By advocating for source solutions, we do not aim to diminish the live music scene. Also, it should be noted that recorded music is as much of a culprit as is general "spill over" noise. To the end that we want to see live music thrive, RECA supports the expansion of the music venue assistance loan program to help venues make improvements that control noise levels. Additionally, RECA would like to see a change in the way sound is measured. Instead of using only an A weight measurement, RECA recommends that a C weight measurement be included as well to better capture bass, the primary source of music-related complaints.

**Like the Downtown Austin Alliance (DAA), RECA suggests the formation of a working group to present recommendations to Council.** This group would include representatives from the City of Austin Downtown Commission, Planning Commission, Music Commission, and Design Commission as well as community groups such as DAA, the Downtown Austin Neighborhood Association, Austin Hotel and Lodging Association, RECA, and other stakeholders. RECA would like to see this group move forward with forming recommendations for Council in 2013, rather than working through the code adoption process to address the problem.

Thank you for your consideration of these comments and this request. Should you have any questions, please do not hesitate to contact RECA staff member Annie Armbrust at 512-320-4151 or aarmbrust@recaonline.com. RECA Board members, volunteers, and staff look forward to being part of the on-going dialogue on this important issue.

Sincerely,

Scott Flack  
President