HISTORIC LANDMARK COMMISSION OCTOBER 28, 2013 NATIONAL REGISTER HISTORIC DISTRICT NRD-2013-0072 Old West Austin 1415 Ethridge Avenue

PROPOSAL

Demolish a non-contributing house and construct a new 3,980 sq. ft. house.

PROJECT SPECIFICATIONS

The existing house was constructed c. 1940. The original portion of the house is one story with a hip and gable roof, and there is two-story, hip roof addition at the rear that was likely built c. 1988. The house, with its Ranch form has very simple architectural features, with painted brick walls, shallow eaves with dentil trim below, shutters on either side of the centered front door, and symmetrical windows.

The applicant proposes to demolish the existing house and construct a new 3,980 sq. ft., two-story house in its place. The new house will have a contemporary design, with multiple, metal clad, hip roof pitches, windows with horizontally oriented panes, stucco cladding, and a front facing attached garage set back from the front facade. The front yard will have a driveway with square concrete pavers, and there will be a pool in the back yard.

STANDARDS FOR REVIEW


The existing property is not contributing to the Old West Austin National Register Historic District. Applicable general design review guidelines state:

- Contemporary design for alterations and additions to existing properties are appropriate when such alterations and additions do not destroy significant historic, architectural, or cultural material and are compatible with the size, scale, color, material, and character of the property, neighborhood, or environment.
- Whenever, possible, new additions or alterations to structures shall be done in such a manner that if such additions or alterations were to be removed in the future, the essential form and integrity of the structure would not be impaired.

Most of the properties on this block of the District have large, two-story houses, some with front facing, attached garages. Although the design is contemporary, the scale, massing, and materials are generally compatible with other properties in the area of the District. However, the multiple hip roofs do not reflect the architectural form of either contributing or non-contributing properties on the block, most of which have more simple side gable or hip roofs.

STAFF RECOMMENDATION

Release the permit per the proposed design with the recommendation that the applicant simplify the roof form.

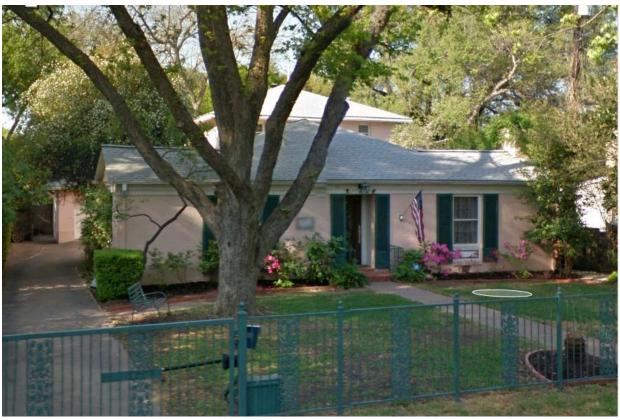

Existing house at 1415 Ethridge



Contributing house on same block



Contributing house on same block



Contributing houses on same block


C.4 - 3




Non-contributing house adjacent to 1415 Ethridge



Non-contributing house across from 1415 Ethridge

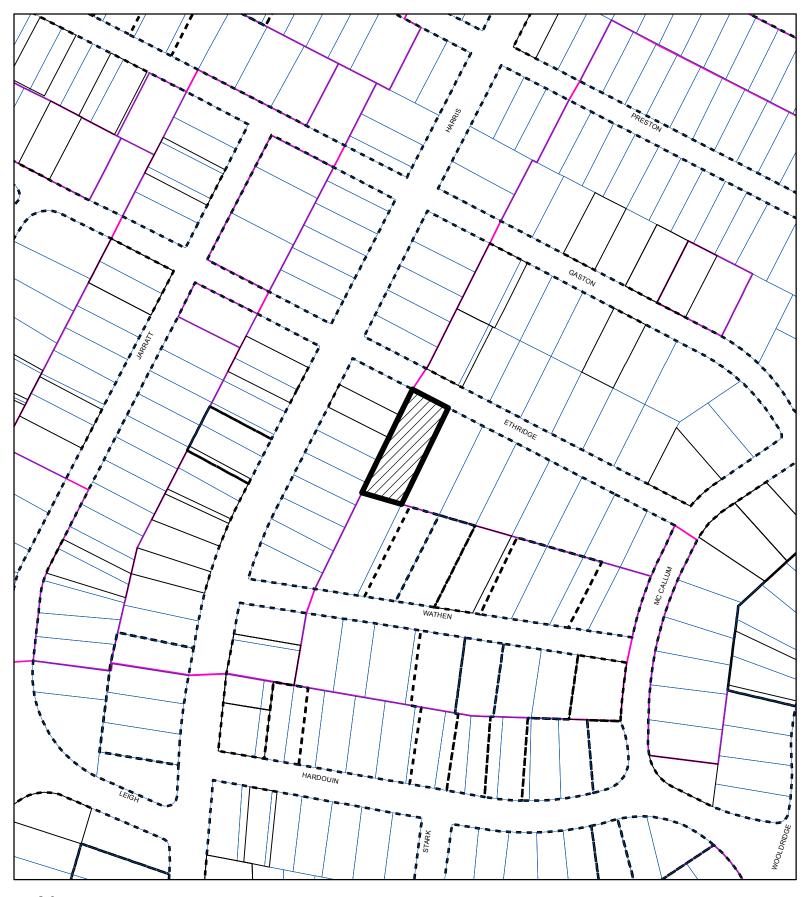



CASE#: NRD-2013-0072 LOCATION: 1415 Ethridge Avenue




This product is for informational purposes and may not have been prepared for or be suitable for legal, engineering, or surveying purposes. It does not represent an on-the-ground survey and represents only the approximate relative location of property boundaries.


This product has been produced by the Planning and Development Review Department for the sole purpose of geographic reference. No warranty is made by the City of Austin regarding specific accuracy or completeness.


GENERAL SITE NOTES:

- 10 BUILDER TO RESCULPTURE TOPO/FINISH GRADE TO PROVIDE PROPER DRAINAGE OF SURFACE WATER AWAY FROM BUILDING AS REQ'D.
- 2.0 FINAL LOCATION OF PROPOSED RESIDENCE TO BE DETERMINED BY BUILDER
- 3.0 EXPOSED FOUNDATION TO BE MINIMUM OF 8" AND A MAXIMUM OF 24" ABOVE FINISHED GRADE OR PER SUBDIVISION REQUIREMENTS. UNDERPIN ALL EXPOSED FOUNDATIONS.
- 4.0 THERE ARE NO STORM SEWER INLETS WITHIN THE LOT FRONTAGE OR 10'-0" BEYOND THE SIDE PROPERTY LINES.
- 5.0 UTILITY LINE LOCATIONS ARE APPROXIMATES-GENERAL CONTRACTOR TO FIELD VERIFY FOR EXACT LOCATIONS.
- 60 VERIFY METER AND UTILITY SERVICE LOCATIONS PRIOR TO INSTALLATION.
- 1.0 EROSION CONTROL BARRIERS TO BE INSTALLED PRIOR TO COMMENCEMENT OF CONSTRUCTION.
- 8.0 STABILIZED TEMPORARY CONSTRUCTION DRIVEWAY TO BE IN PLACE PRIOR TO COMMENCEMENT OF CONSTRUCTION.
- 30 CONFIRM ALL DRIVEWAY, WALKWAY AND PVC LAYOUTS/LOCATIONS PRIOR TO COMMENCING WORK.
- 10.0 PROVIDE CONTROL AND EXPANSION JOINTS AS REQUIRED ON CONCRETE DRIVES, WALKS AND PATIOS.
- 11.0 ALL EXTERIOR HYAC EQUIPMENT TO BE SCREENED PER CITY REQUIREMENTS, DEED RESTRICTIONS OF SUBDIVISION OR NEIGHBORHOOD ASSOCIATION.
- 12.0 GARBAGE RECEPTACLES TO BE STORED IN GARAGE OR SCREENED FROM VIEW AND ANIMAL ACCESS.
- 130 LOCATION OF MAILBOX AND EXTERIOR DRIVEWAY LIGHT(S) TO BE VERIFIED PRIOR TO INSTALLATION.
- 14.0 ALL CONSTRUCTION MATERIALS AND WASTE TO BE STORED ON SITE DURING CONSTRUCTION.
- 15.0 LANDSCAPE PLANS TO BE PROVIDED BY OTHERS AND PERMIT FOR SAME TO BE OBTAINED SEPARATELY FROM THESE PLANS.
- 16.0 NO EXISTING TREES TO BE REMOVED OR DISTURBED WITHOUT OWNER APPROVAL.
- 17.0 ALL STUMPS AND ROOTS SHALL BE REMOVED FROM THE SOIL TO A DEPTH OF 12" BELOW THE SURFACE OF THE GROUND IN THE AREA OF THE BUILDING.
- 18.0 CONTRACTOR SHALL CLEAN UP AREAS AFFECTED BY DAILY WORK AND REMOVE DEBRIS AND MATERIALS FROM THE SITE UPON COMPLETION OF THE WORK.

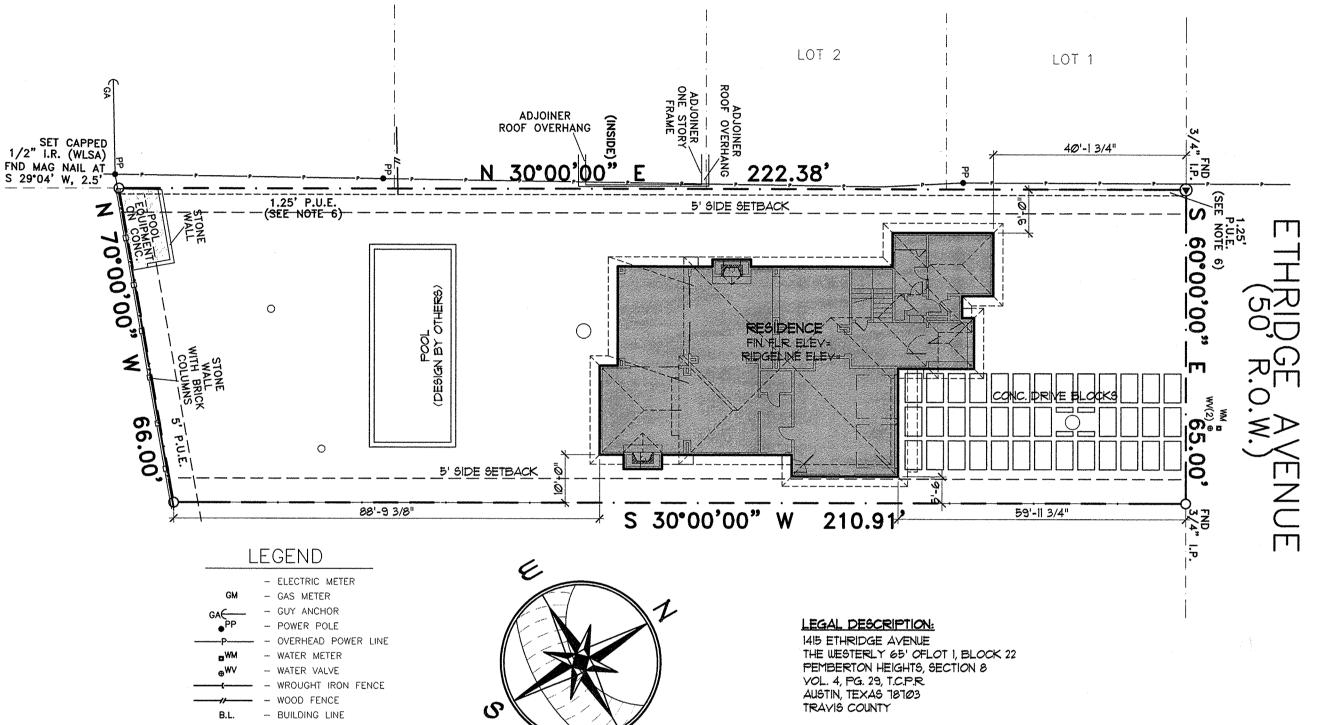


シ



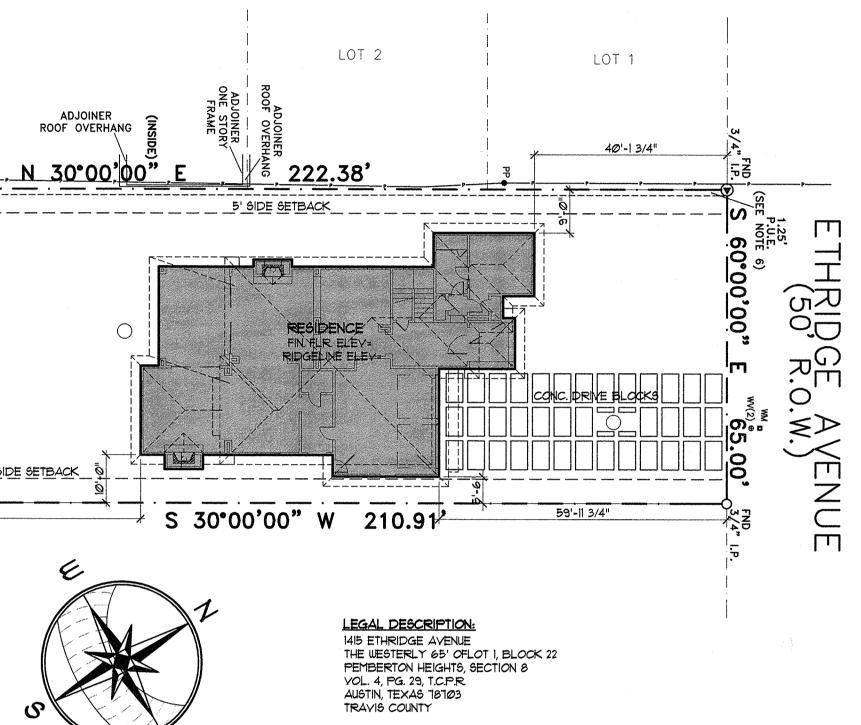

CGAPARTNERS A LIMITED LIABILITY PARTNERSHIP CORNERSTONE GROUP ARCHITECTS 7000 BEE CAVES RD, SUITE 200 AUSTIN TX 78746 T (512) 329 0007 F (512) 329 0008 WWW.CGAPARTNERS.NET	A CUSTO THE 1415 E
	AUS

SITE PLAN SCALE 1:20

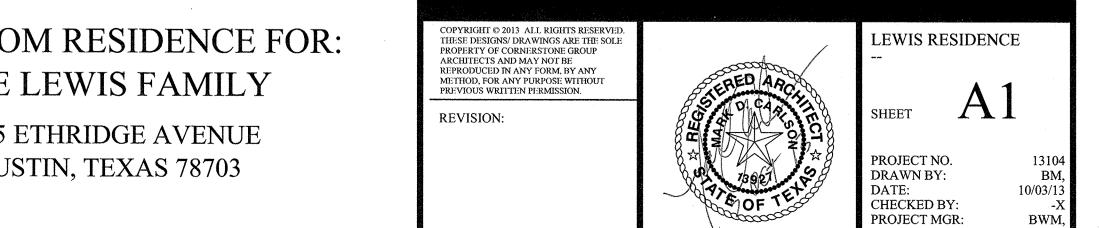


GENERAL PROJECT NOTES

- Ø THESE CONSTRUCTION DOCUMENTS ARE INTENDED TO MEET ALL APPLICABLE CODES AND ORDINANCES. CONTRACTOR TO COMPLY WITH ALL LOCAL CODES ORDINANCES AND DEED RESTRICTIONS. CONTRACTOR 20 SHALL ALSO REQUIRE ALL SUBCONTRACTORS TO COMPLY WITH THESE REGULATIONS.
- 2.0 ANY DISCREPANCIES IN CONSTRUCTION DOCUMENTS OR NONCOMPLIANCE TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO ANY WORK BEING PERFORMED OR MATERIALS BEING ORDERED
- 3.0 BUILDER ACCEPTS FULL RESPONSIBILITY FOR CHECKING PLANS TO ASSURE CONFORMITY TO CURRENT LOCAL BUILDING CODES. SHOULD ANY CHANGES BE MADE TO 4.0 THESE PLANS BY BUILDER OR HIS REPRESENTATIVES WITHOUT CONTACTING THE ARCHITECT, THE BUILDER WILL ACCEPT FULL LIABILITY FOR AMENDED PLANS.
- ARCHITECTS ARE GOVERNED BY THE TEXAS BOARD 40 OF ARCHITECTURAL EXAMINERS, (512)458-1363.
- 50 WHILE THESE DRAWINGS ARE INTENDED TO SHOW SAME. THE ARCHITECT IS NOT RESPONSIBLE FOR GOVERNING AUTHORITY INTERPRETATIONS WHERE THOSE INTERPRETATIONS CONFLICT WITH THESE DRAWINGS \$/OR SPECS.
- PORTIONS OF THIS WORK MAY NOT HAVE BEEN 60 DRAWN BY A REGISTERED ARCHITECT.
- 1.0 THESE DRAWINGS/SPECS ARE INSTRUMENTS OF SERVICE AND SHALL REMAIN THE PROPERTY OF THE ARCHITECT WHETHER THE PROJECT IS EXECUTED OR NOT. THESE DRAWINGS SHALL NOT BE USED BY THE CLIENT FOR OTHER PROJECTS, FOR ADDITIONS TO THIS PROJECT, OR FOR COMPLETION OF THIS PROJECT BY OTHERS WITHOUT PERMISSION OF THIS ARCHITECT.
- 8.0 THESE DOCUMENTS DO NOT SHOW TYPICAL DETAILING #/OR WATERPROOFING.
- 9.0 THESE DOCUMENTS DO NOT SPECIFY ACTUAL PRODUCTS OR MATERIAL SELECTIONS. CONTRACTOR ACCEPTS FULL RESPONSIBILITY FOR APPROPRIATE AND PROPER DETAILING FOR AND BETWEEN ALL ACTUAL PRODUCTS/MATERIALS SELECTED WHEN INSTALLED.
- 10.0 ALL COMPONENTS, MATERIALS, ASSEMBLIES AND FINISHES TO BE CONSTRUCTED AND INSTALLED PER MANUFACTURER'S RECOMMENDATIONS, CODE REQUIREMENTS AND REGULATED BUILDING PRACTICES.
- 11.0 ARCHITECT IS NOT RESPONSIBLE FOR MEANS AND METHODS OF CONSTRUCTION WHICH ARE NOT DETAILED IN THESE CONSTRUCTION DOCUMENTS. CONTRACTOR WILL BE RESPONSIBLE FOR ALL ASPECTS OF CONSTRUCTION INCLUDING BUT NOT LIMITED TO ALL WATER AND DAMP PROOFING, LOAD CONNECTIONS AND MECHANIC, ELECTRICAL AND PLUMBING SYSTEMS.
- 12.0 ALL MATERIALS AND LABOR TO BE GUARANTEED FOR ONE YEAR FROM THE DATE OF FINAL PAYMENT, IN ADDITION TO ALL WARRANTIES THAT ARE STANDARD TO THE INDUSTRY. CONTRACTOR TO PROVIDE (SUPPLY AND INSTALL) ALL EQUIPMENT, LABOR SERVICES, AND MATERIALS REQUIRED FOR THE COMPLETE APPROVED INSTALLATION OF THE SYSTEMS CALLED FOR.
- 13.0 THESE DRAWINGS DO NOT INCLUDE NECESSARY COMPONENTS FOR CONSTRUCTION SAFETY. THE CONTRACTOR IS RESPONSIBLE FOR INITIATING, MAINTAINING AND SUPERVISING ALL SAFETY PRECAUTIONS AND PROGRAMS NECESSARY FOR COMPLETION OF WORK
- 140 ALL DIMENSIONS TO BE VERIFIED IN THE FIELD, REPORT ANY AND ALL DISCREPANCIES, ERRORS OR OMISSIONS TO THE ARCHITECT PRIOR TO COMMENCING WORK AND/OR ORDERING MATERIALS. MINOR DEVIATIONS, SUBJECT TO CONSTRUCTION REQUIREMENTS AND FIELD CONDITIONS, CAN BE EXPECTED.
- 15.0 UNDER NO CIRCUMSTANCES SHALL ANY DIMENSION BE SCALED FROM THESE DRAWINGS. ANY CRUCIAL DIMENSION NOT GIVEN SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT.
- 16.0 ALL DIMENSIONS SHOWN ON PLAN ARE TO THE STRUCTURAL FACE OF WALL AND DO NOT INCLUDE WALL FINISHES OR FURRING
- 17.0 THE CONTRACTOR SHALL GIVE NOTICE TO ALL AUTHORIZED INSPECTORS, SUPERINTENDENTS OR PERSONS IN CHARGE OF UTILITIES AFFECTED BY HIS OPERATIONS PRIOR TO COMMENCING WORK
- 18.0 THE CONTRACTOR IS TO FILE FOR, AND SECURE ALL APPROVALS, PERMITS, TESTS, INSPECTIONS AND CERTIFICATES OF COMPLIANCE AS REQUIRED. THE CONTRACTOR IS RESPONSIBLE FOR ASSURING THAT ALL PERMITS NECESSARY TO LEGALLY PERFORM THE WORK HAVE BEEN OBTAINED PRIOR TO COMMENCING CONSTRUCTION.
- 19.0 VERIFY EXISTING CONDITIONS AND DIMENSIONS PRIOR TO CONSTRUCTION START.
- 200 IN CASE OF DISCREPANCIES OR CONFLICTS ON THE DRAWINGS AND SPECIFICATIONS, OR BETWEEN THE DRAWINGS AND THE EXISTING CONDITIONS, CONTACT THE ARCHITECT OR OWNER BEFORE PROCEEDING WITH THE WORK
- 21.0 CONTRACTOR SHALL CLEAN UP CONSTRUCTION AREAS AFFECTED BY DAILY WORK AND MAINTAIN A CLEAN AND ORDERLY WORK AREA AT ALL TIMES. REMOVE MATERIALS TO APPROVED DUMP SITES ONLY.

GENERAL PLAN NOTES:

- 1Ø ALL WINDOWS WILL BE DIMENSIONED TO CENTER LINE UNLESS OTHERWISE NOTED. GLASS SIZE PER MFR. SPECS.
- ALL WINDOWS WITHIN 24" OF AN EXTERIOR OR INTERIOR DOOR TO BE TEMPERED GLASS. WINDOW MANUFACTURER TO VERIFY FOR ALL TEMPERED GLASS LOCATIONS AS PER APPLICABLE CODE.
- 3.0 ALL HINGED SHOWER DOORS SHALL SWING OUTWARD. GLAZING USED IN DOORS AND PANELS OF BATHTUB/SHOWER ENCLOSURES AND BUILDING WALLS ENCLOSING THESE COMPARTMENTS SHALL BE FULLY TEMPERED OR LAMINATED SAFETY GLASS.
- WINDOW MANUFACTURER & BUILDER TO VERIFY EGRESSABLE WINDOWS INSTALLED WHERE REQUIRED BY CODE.
- 5.0 THESE DOCUMENTS REFLECT NOMINAL WINDOW SIZES, WINDOW MANUFACTURER TO USE STANDARD SIZES UNLESS NOTED OTHERWISE.
- 60 PROVIDE BLOCKING FOR CEILING FANS WHERE SPECIFIED. 120 IF PLATE HEIGHT IS 10'-0" OR HIGHER, ALL DOORS
- 1.0 PROVIDE ELECTRIC FOR POOL 4/OR SPA EQUIP. 4 LIGHTS. PROVIDE NECESSARY PLUMBING FOR POOL \$/OR SPA. VERIFY LOCATION WITH BUILDER OR OWNER.
- 8.0 BUILDER TO VERIFY SIZING AND LOCATION OF ALL APPLIANCES & RELATED COMPONENTS.
- 9.0 WEATHERSTRIP ATTIC ACCESS DOOR(S).
- 10.0 CONTRACTOR TO PROVIDE A 3/4" PLYWOOD CATWALK FROM ATTIC ACCESS TO HVAC UNITS (IF APPLICABLE). UNITS TO BE LOCATED WITHIN 20'-O" OF ACCESS.

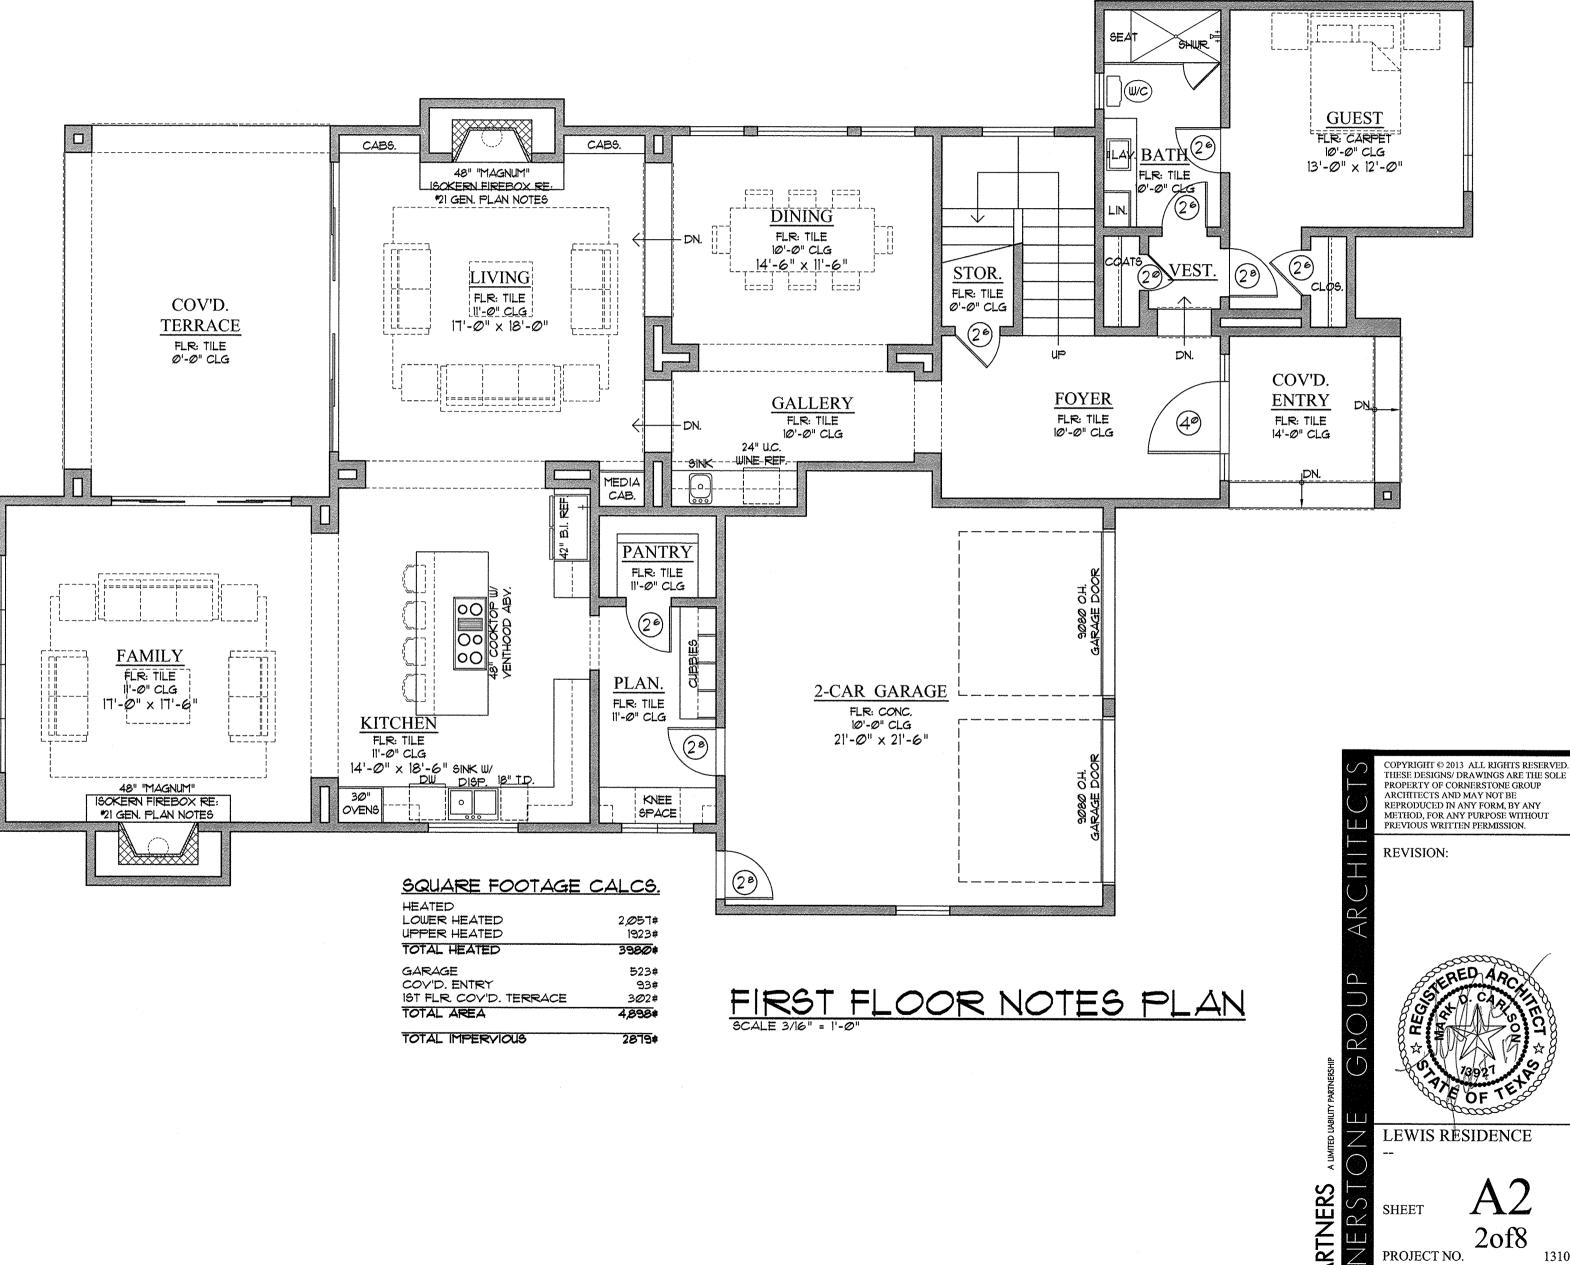

- 11.0 IN VENTED ROOF ASSEMBLIES PROVIDE I SF. NET FREE AREA OF ATTIC VENTILATION PER 150 SF. OF TOTAL COVERED ROOF AREA AS PER CODE.
- AND CASED OPENINGS TO BE 8'-0" HT. UNLESS NOTED OTHERWISE. IF PLATE HEIGHT IS 9'-O" OR LESS. ALL DOORS AND CASED OPENINGS TO BE 6'-8" HT. UNLESS NOTED OTHERWISE. EXCEPTION_IF A 7'-@" HT. DOOR IS USED ADJUST WINDOWS TO T'-O" HEADER HT.
- 13.0 ALL PLUMBING, APPLIANCE AND GAS VENTS TO VENT TO REAR OF ROOF RIDGE WHEREVER POSSIBLE. ALL VENTS TO BE GANGED TO THE FEWEST NUMBER POSSIBLE PENETRATING THE ROOF.
- 14.0 PROVIDE CONTROL AND EXPANSION JOINTS AS REQUIRED ON CONCRETE DRIVES, WALKS AND PATIOS.

- 15.0 PROVIDE WEATHERSEAL AND A 9 1/2" MASONRY DOOR SILL AT ALL EXTERIOR DOOR THRESHOLDS.
- 16.0 UNLESS NOTED OTHERWISE STANDARD PANTRY SHELVING TO BE AS FOLLOWS:

LOWEST 2 SHELVES TO BE 16" D. WITH HEIGHT SPACING OF 14" CLEAR.

REMAINING SHELVES TO BE 12" D. WITH HEIGHT SPACING OF 12" CLEAR.

- 17.0 ALL WALLS OVER 10'-0" IN HEIGHT TO BE FRAMED WITH 2x6 STUDS. IF WALLS OVER 10'-0" IN HEIGHT ARE NOT BUILT WITH 2X6 STUDS THEY MUST BE BUILT WITH DOUBLE 2X4 STUDS AT 12" O.C.
- 18.0 THE DROP FROM INTERIOR FINISH FLOOR TO ANY EXTERIOR FINISH FLOOR IS TO BE A MINIMUM OF 1/2". CONTRACTOR TO VERIFY MATERIALS USED FOR DECK CONSTRUCTION AND FINISH FLOORING TO MAINTAIN MINIMUM DROP.
- 19.0 THE STANDARD MOUNTING HEIGHT FOR SHOWER HEADS IS T'-O" ABOVE FINISH FLOOR UNLESS NOTED OTHERWISE.
- 20.0 PROVIDE BLOCKING FOR HANDRAIL MOUNTING AT STAIRS AS NECESSARY.
- 210 ALL FIREPLACES TO HAVE 20" DEEP HEARTH # 12" NON-COMBUSTIBLE SURROUND

LEGEND:

TGAS KEY \mathbb{A}_{GAS} the should head those bibb

PROJECT NO.

CHECKED BY:

PROJECT MGR:

DRAWN BY:

DATE:

 \checkmark

P

 \propto


13104


10/03/13


BWM,


BM.

-X

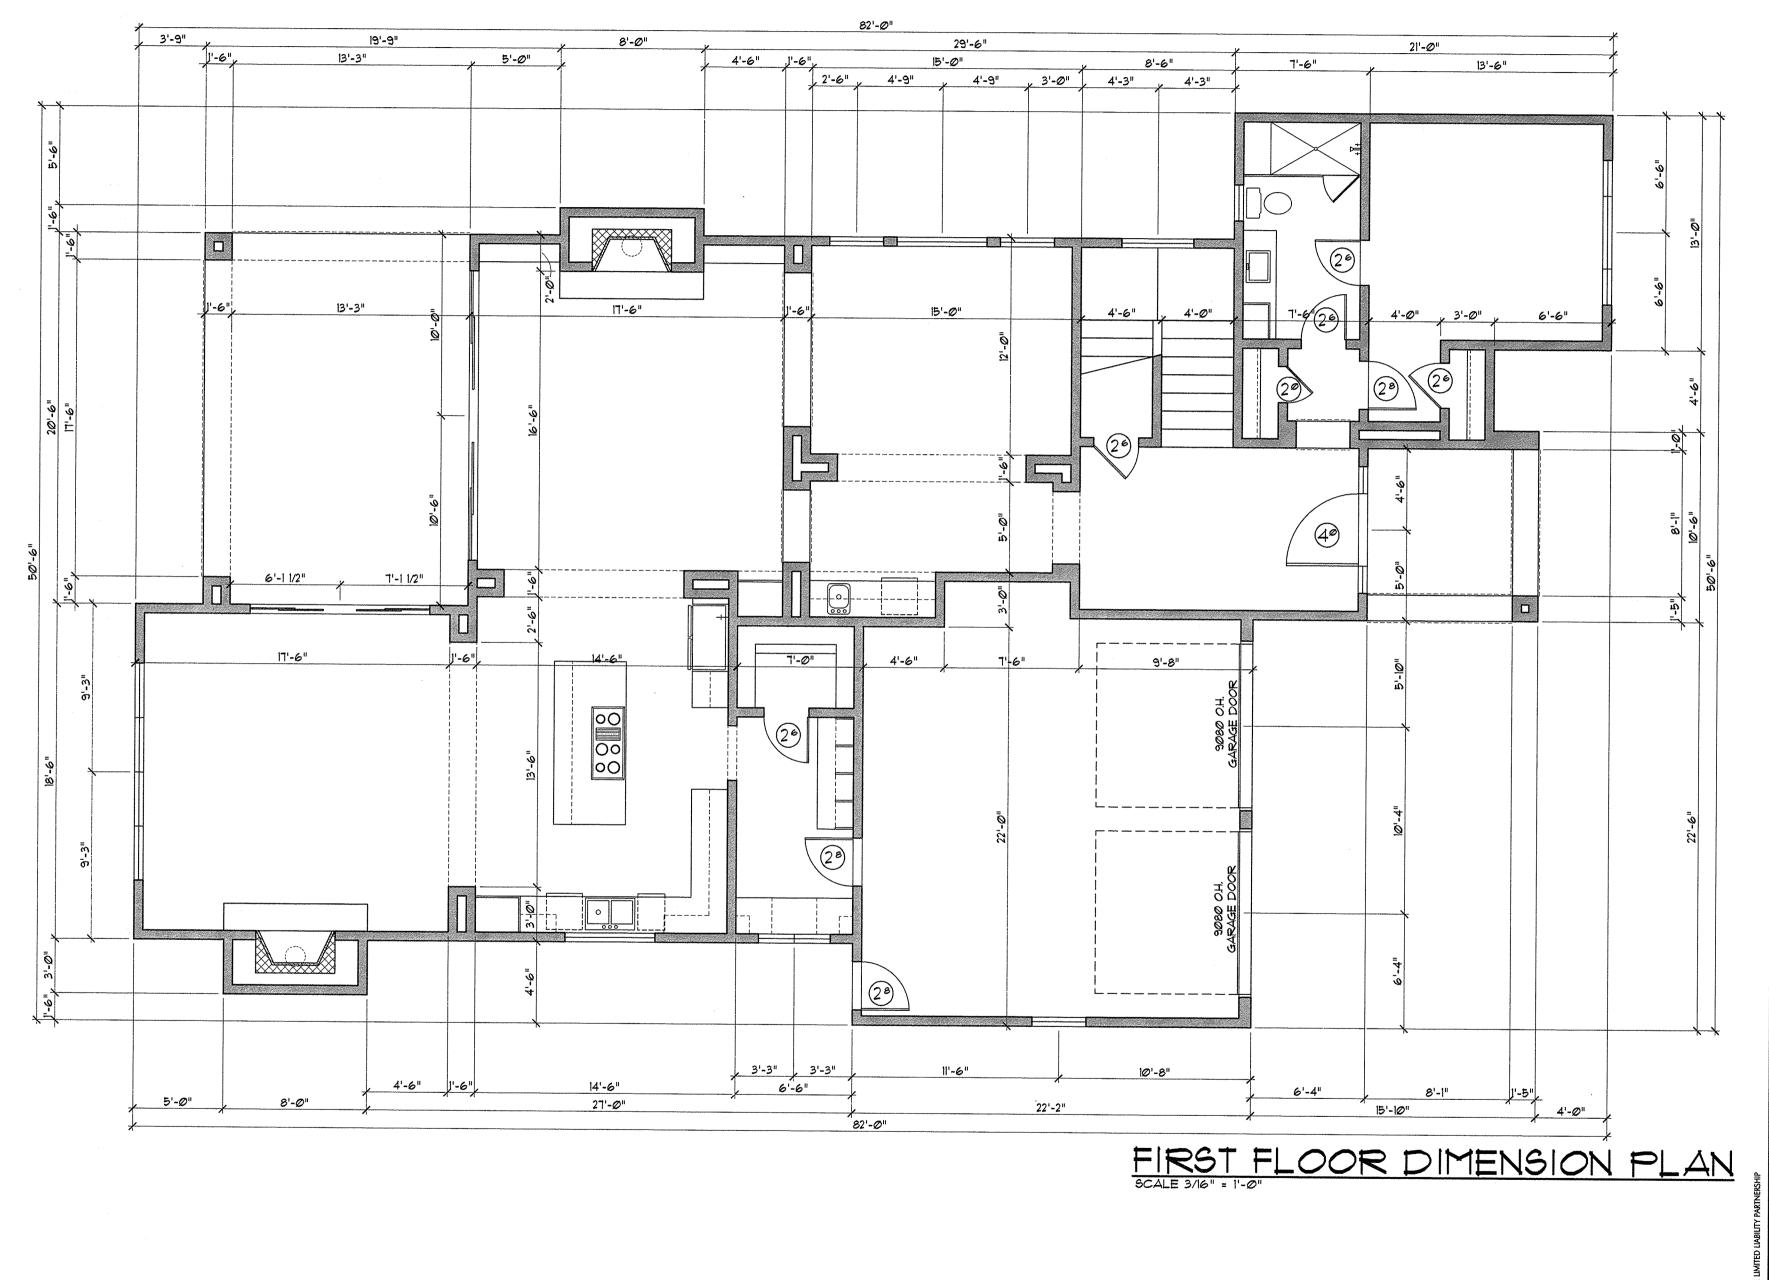

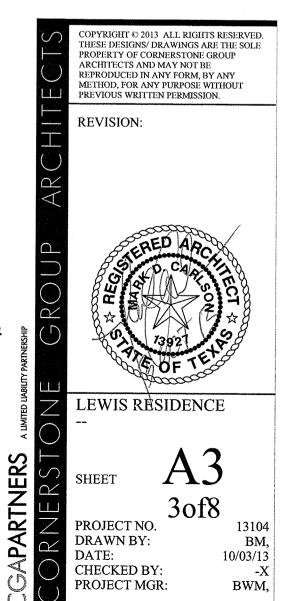


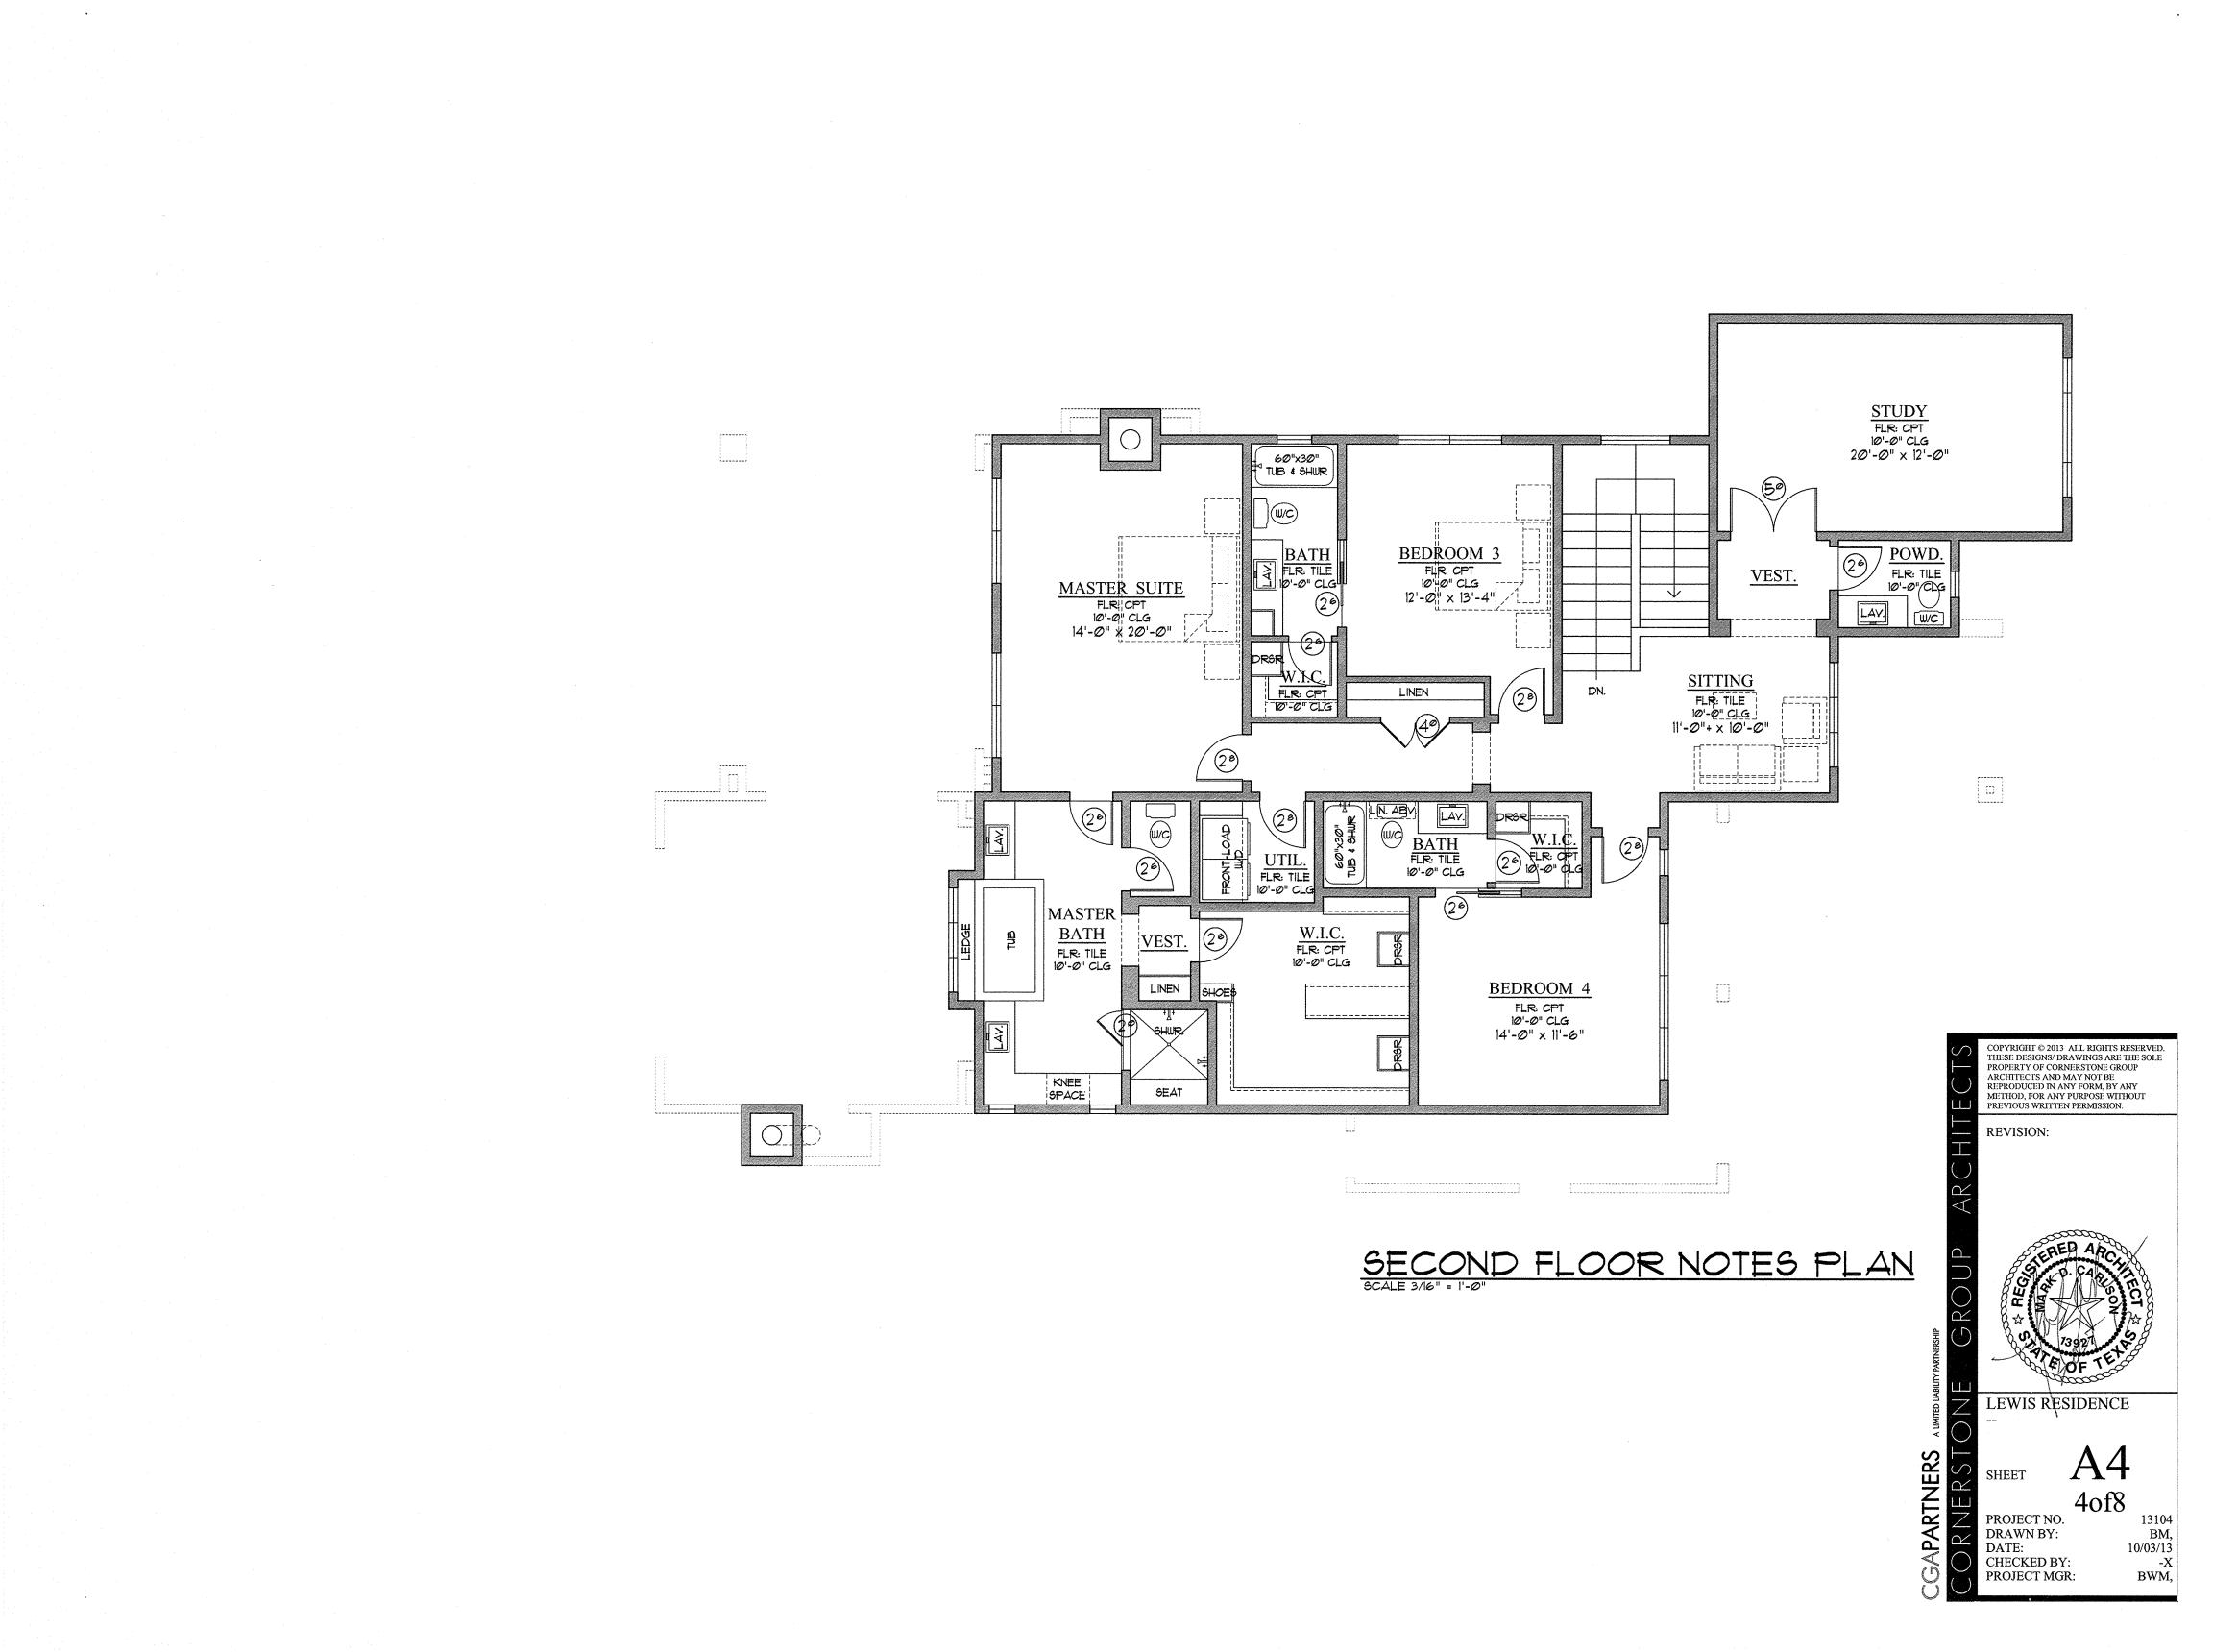

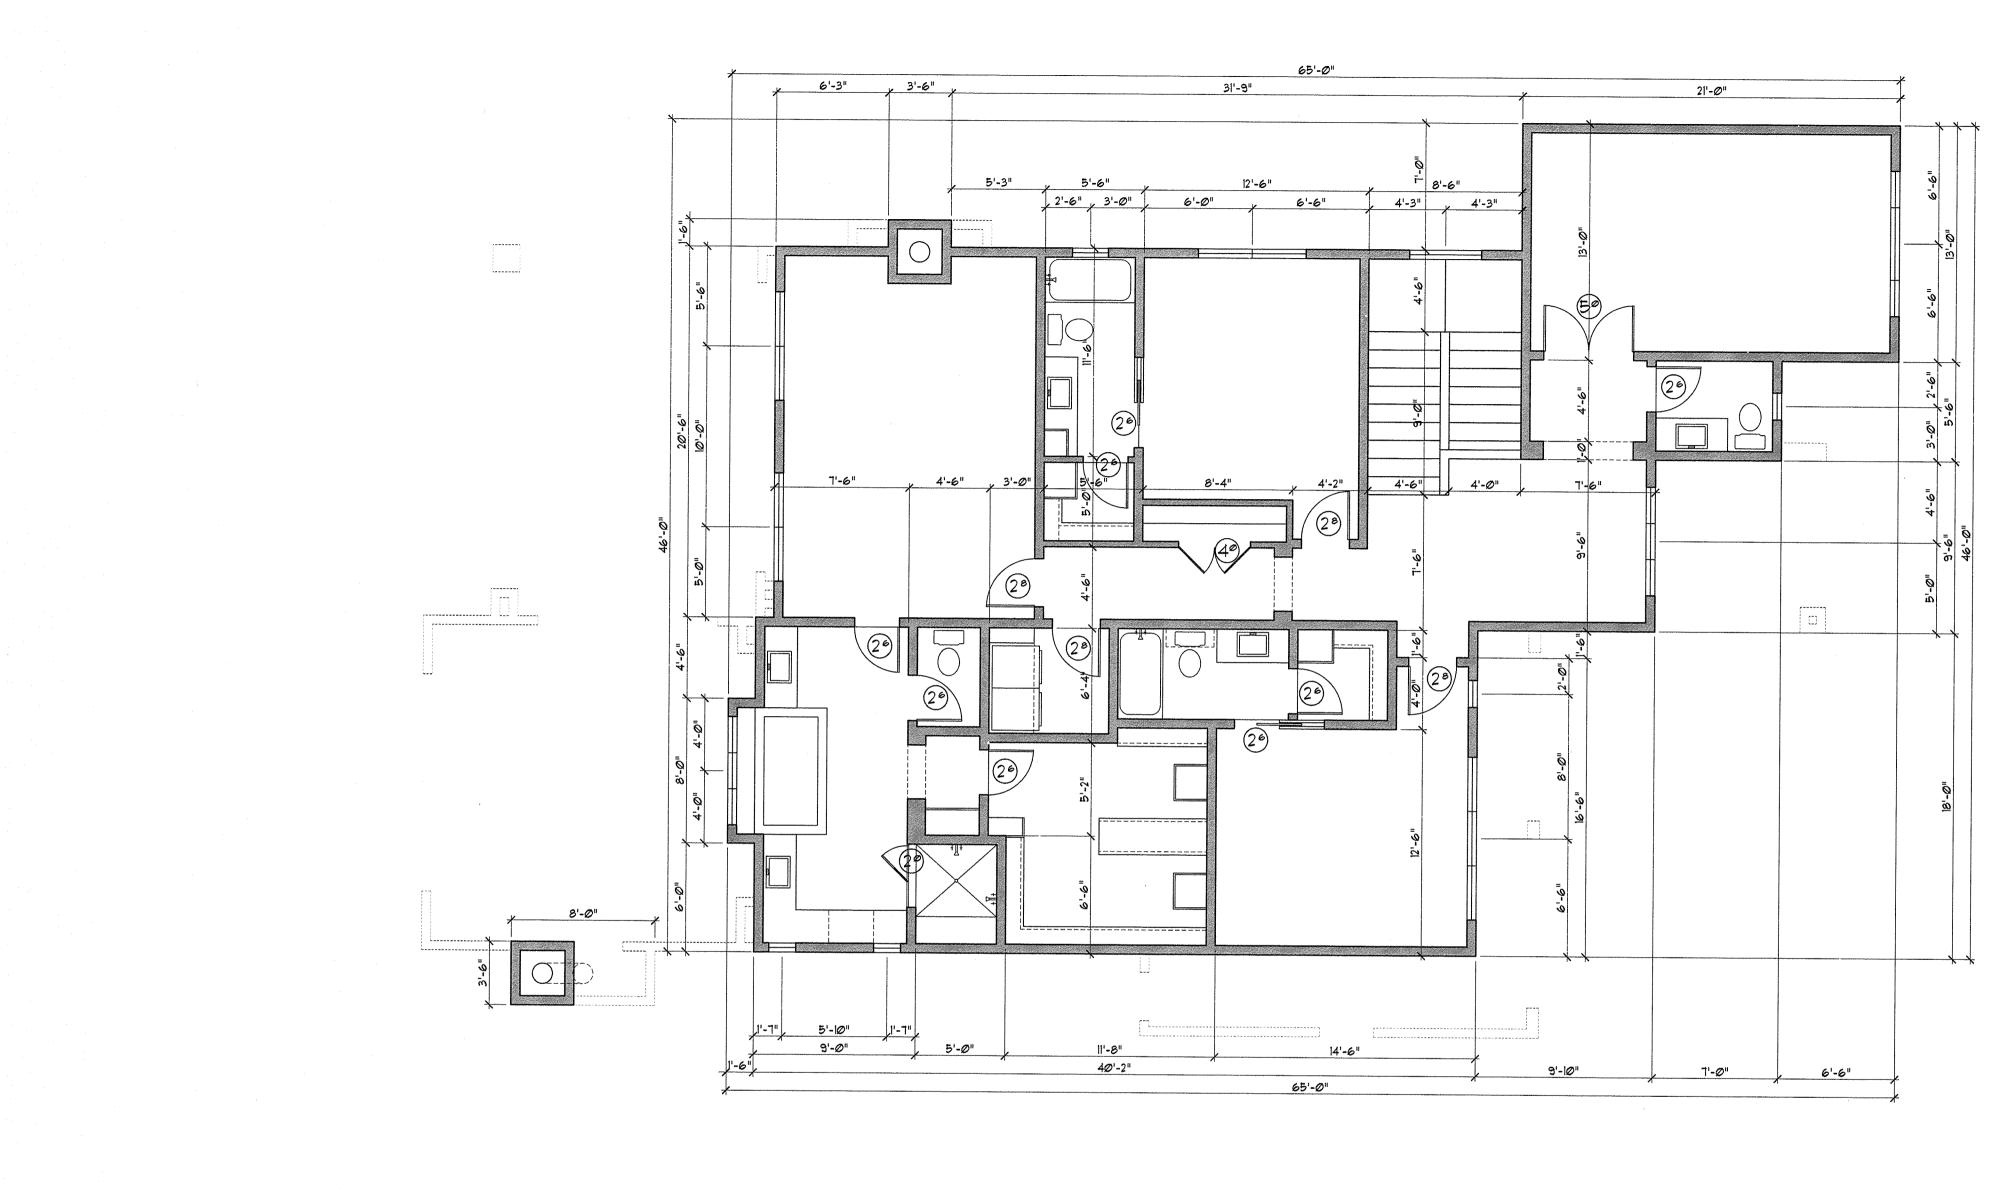

•

SECOND FLOOR DIMENSION PLAN

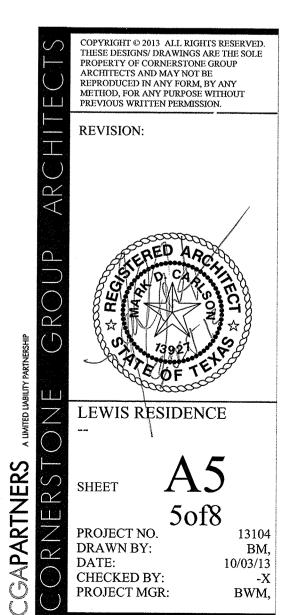

GENERAL ELEVATION NOTES


•

•

- 10 ALL WINDOW HDR. HTS. LOWER FLOOR TO BE 8'-0" AFF. UNLESS NOTED OTHERWISE ON FLOOR PLANS. ALL WINDOW HDR. HTS. UPPER FLOOR TO BE 6'-8" AFF. UNLESS NOTED OTHERWISE ON FLOOR PLANS.
- 2.0 PROVIDE MIN. 4" W. TRIM AT ALL SIDES OF ALUMINUM WINDOWS. STUCCO TRIM AT STUCCO WALL VENEER AND 1X4 WD. TRIM AT SIDING/WOOD VENEERS.
- 3.0 EXPOSED FOUNDATION TO BE MINIMUM OF 8" AND A MAXIMUM OF 24" ABOVE FINISHED GRADE OR PER SUBDIVISION REQUIREMENTS. UNDERPIN ALL EXPOSED FOUNDATIONS.
- 40 GRADE LINES SHOWN ON ELEVATION DRAWINGS SHALL NOT BE CONSTRUED TO REPRESENT ACTUAL FINISH GRADES. VERIFY FINISH GRADE ON JOB SITE.
- 5.0 ACTUAL ELEVATIONS TO VARY PER GRADE OF EXISTING LOT.
- 6.0 ALL PLUMBING, APPLIANCE AND GAS VENTS TO BE GANGED TO THE FEWEST NUMBER POSSIBLE PENETRATING THE ROOF AND KEPT TO REAR OF ROOF WHEREVER POSSIBLE.
- 7.0 CHIMNEY/FLUE SHOWN AT MINIMUM DIMENSIONAL HEIGHT REQUIREMENTS PER CODE. BUILDER RESPONSIBLE FOR CONSTRUCTING CHIMNEY/FLUE TO ENSURE PROPER DRAW FOR FIREPLACE BASED ON HOUSE & SITE ORIENTATION VERSUS PREVAILING WINDS.
- 8.0 CONTRACTOR TO PROVIDE RAINSCREEN AND FLASHING BEHIND ALL STUCCO / SIDING VENEERS TO ASSURE ADEQUATE DRAINAGE.





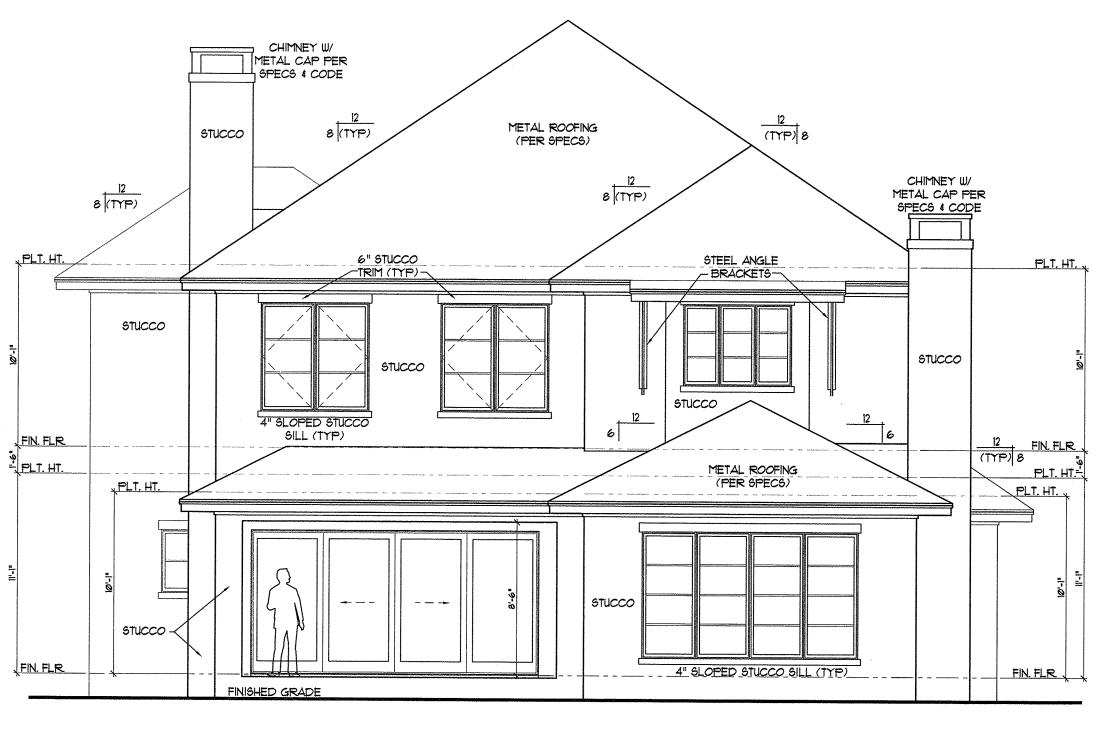




THESE DESIGNS/ DRAWINGS ARE THE SOLE PROPERTY OF CORNERSTONE GROUP ARCHITECTS AND MAY NOT BE REPRODUCED IN ANY FORM, BY ANY METHOD, FOR ANY PURPOSE WITHOUT PREVIOUS WRITTEN PERMISSION. Ľ **REVISION:** Ω and ERED AA ROU LEWIS RÉSIDENCE A6 SHEET \simeq 60f8 RNE PROJECT NO. DRAWN BY: DATE: CHECKED BY: PROJECT MGR: 13104 BM, 10/03/13 \bigcirc -X BWM,

APARTNERS

Ō


COPYRIGHT © 2013 ALL RIGHTS RESERVED.


•

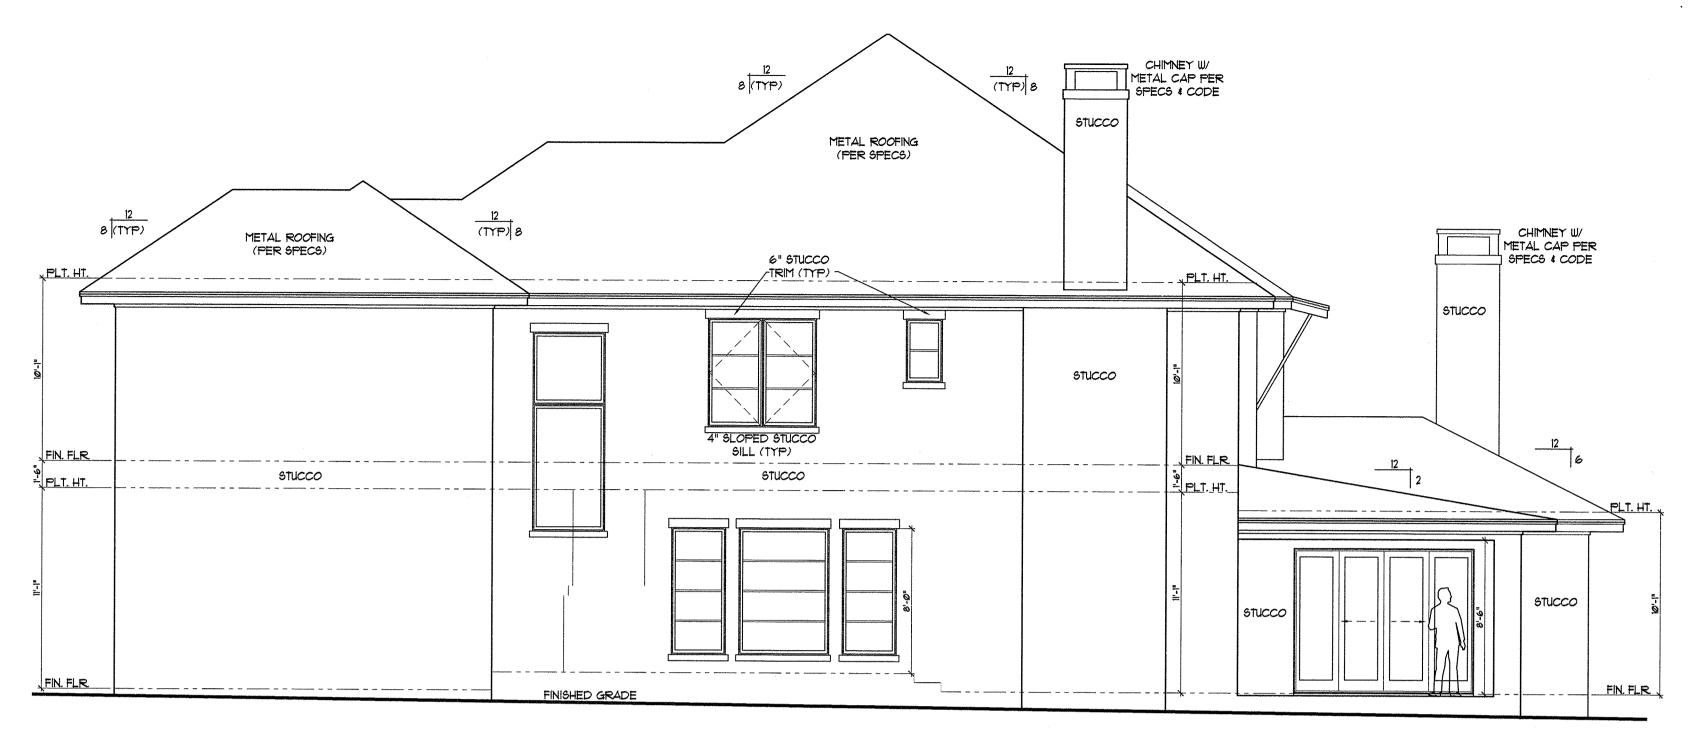



.

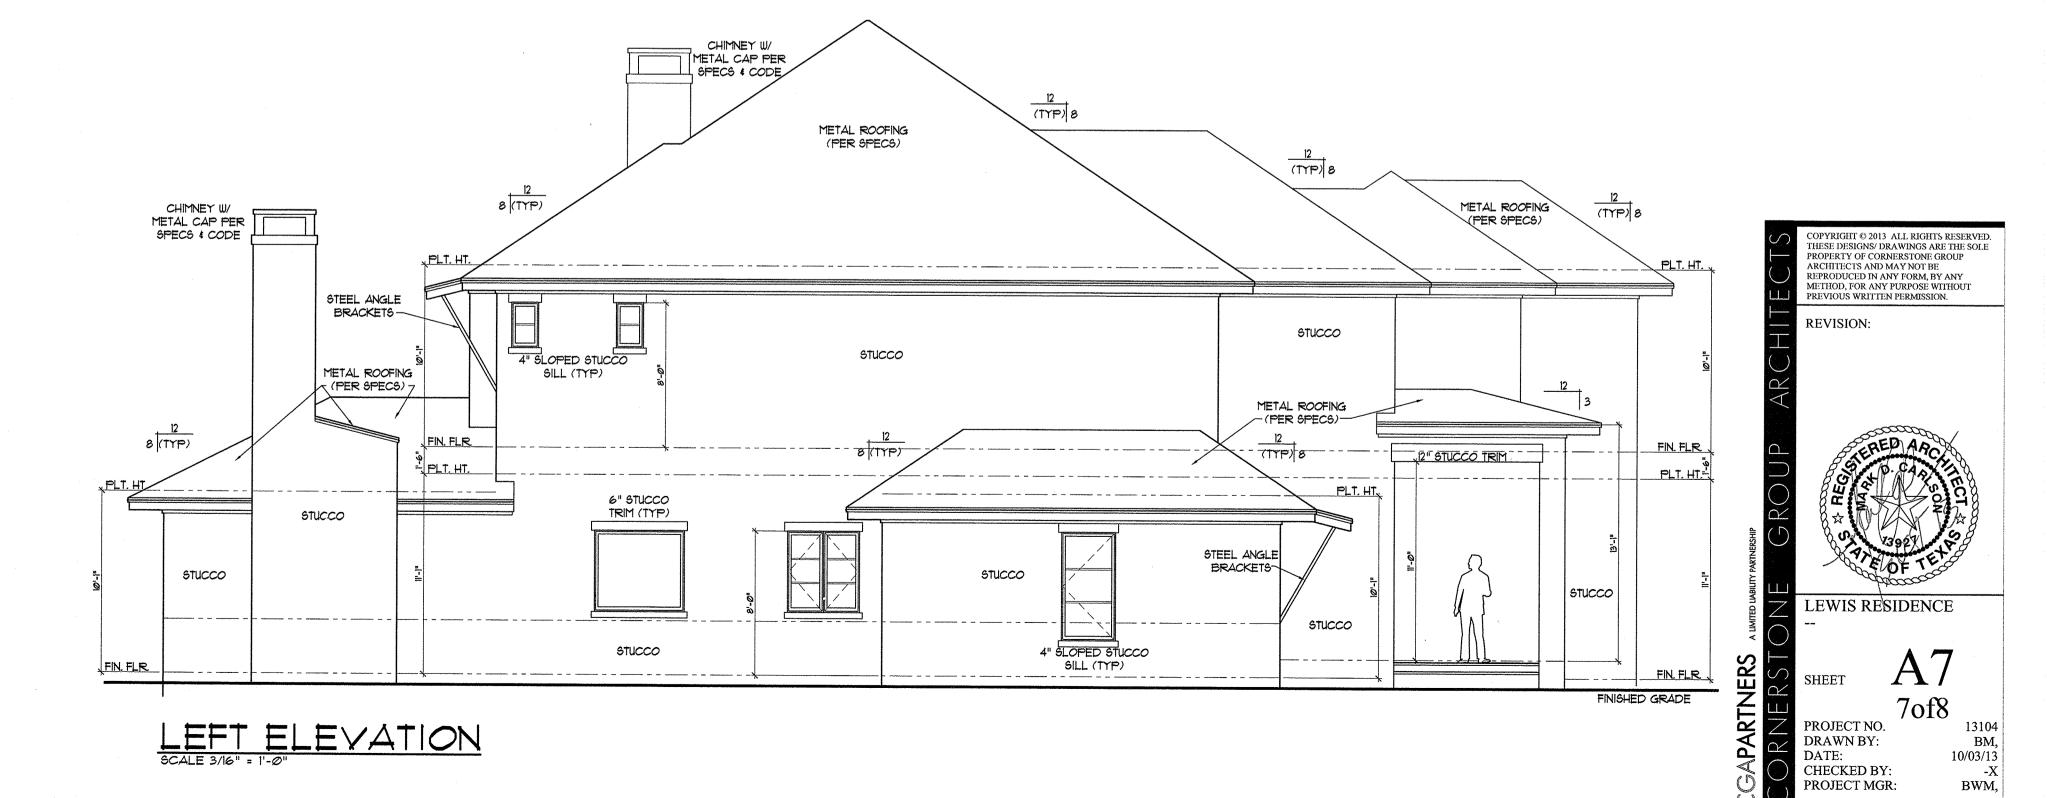

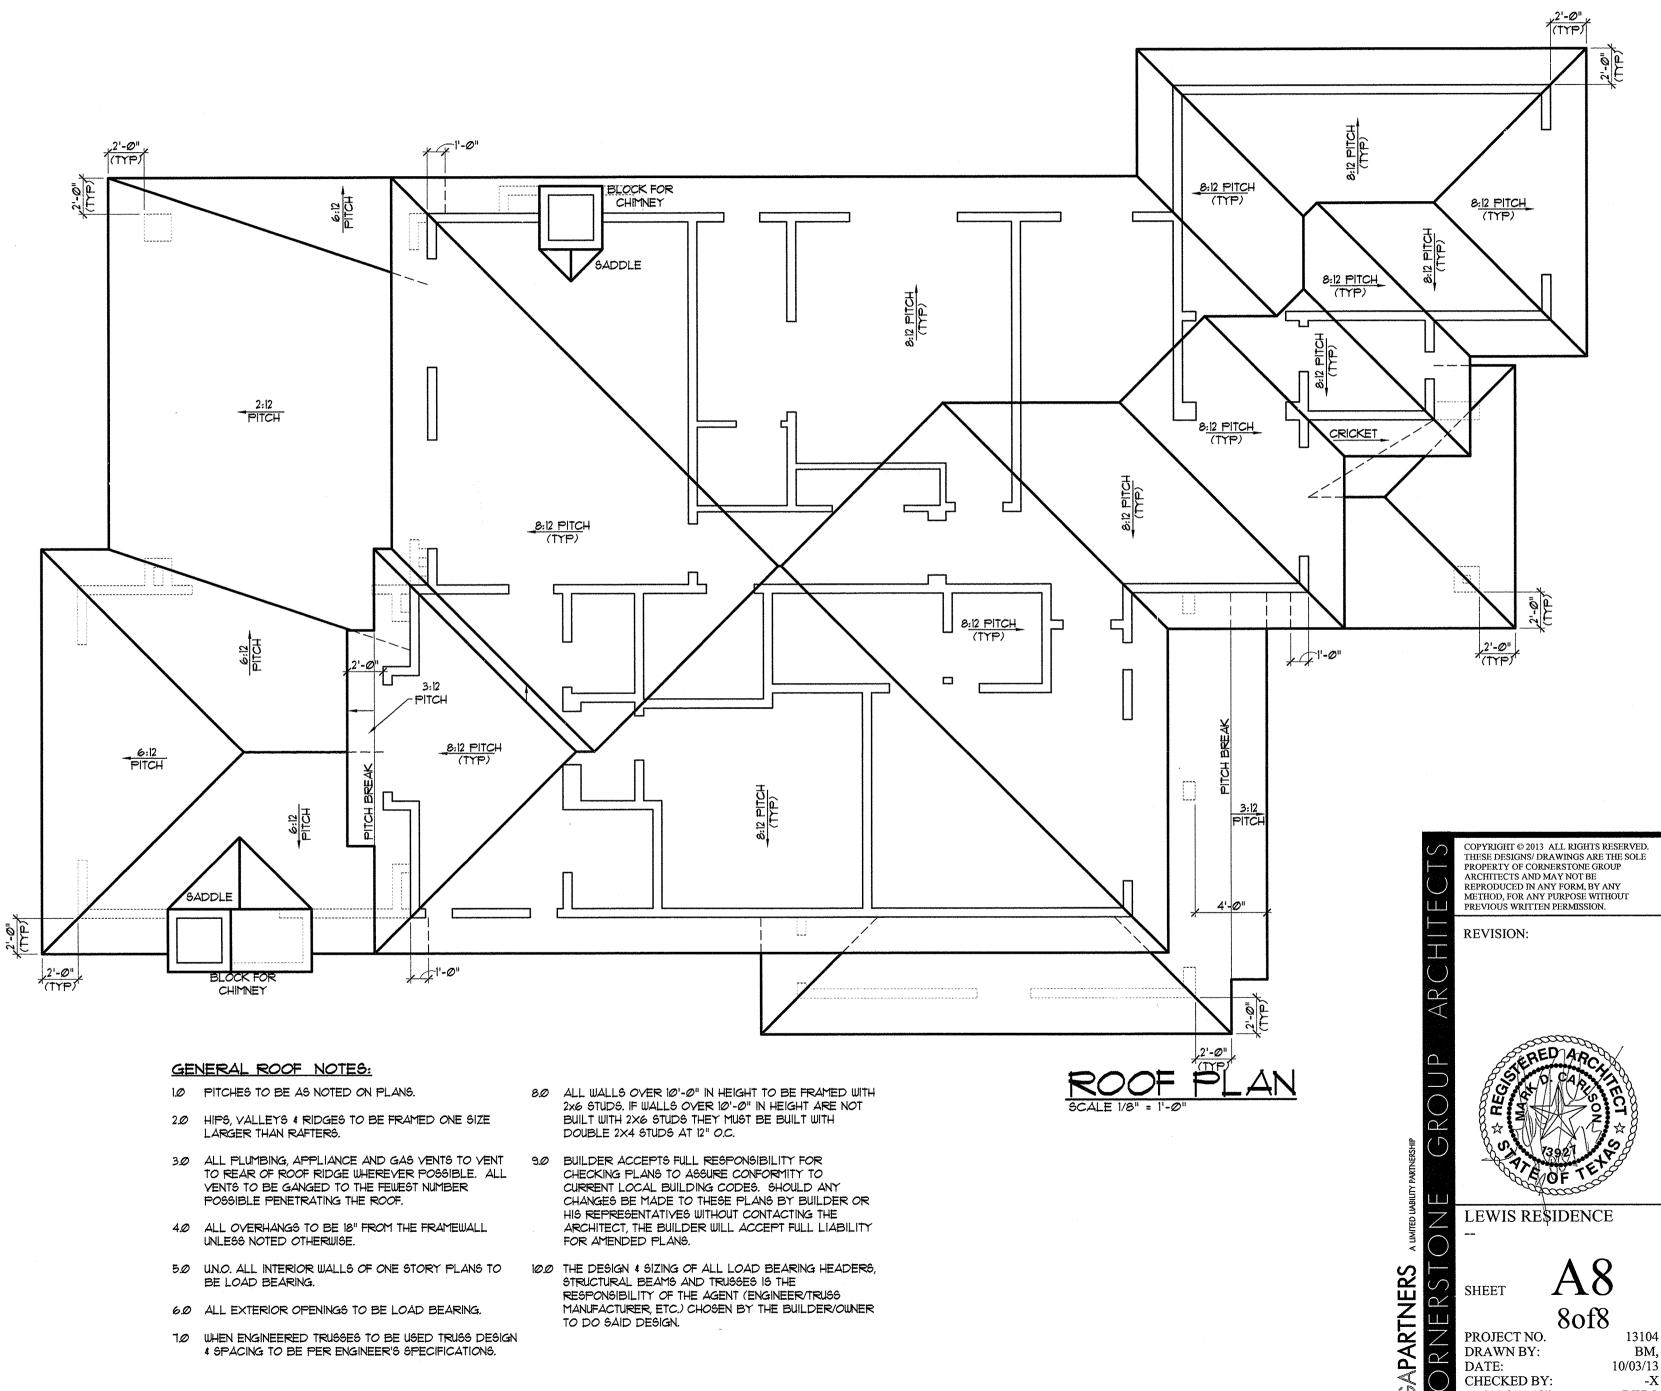

- 1.0 WHEN ENGINEERED TRUSSES TO BE USED TRUSS DESIGN 4 SPACING TO BE PER ENGINEER'S SPECIFICATIONS.

BM,

-X

10/03/13

BWM,

DRAWN BY:

CHECKED BY:

PROJECT MGR:

DATE:

OR

Ć