

Job Valuation		Amount of Total Job Valuation dedicated to all Addition and/or New Construction:		Amount of Total Job Valuation dedicated to all Remodel/Repair:	
Total Job Valuation:	<u>300,000</u>	\$	<u>200,000</u>	\$	<u>50,000</u>
Note: The total job valuation should be the sum total of all valuations noted to the right. Labor and materials only, rounded to nearest dollar. Permit fees are based on adopted fee schedule.		Amount for Primary Structure: \$ <u>200,000</u>		Bldg: \$ <u>10,000</u>	
		Elec: <input checked="" type="checkbox"/> Y <input type="checkbox"/> N Plmbg: <input checked="" type="checkbox"/> Y <input type="checkbox"/> N Mech: <input checked="" type="checkbox"/> Y <input type="checkbox"/> N		Elec: \$ <u>10,000</u>	
		Amount for Accessory Structure: \$		Plmbg: \$ <u>10,000</u>	
		Elec: <input type="checkbox"/> Y <input type="checkbox"/> N Plmbg: <input type="checkbox"/> Y <input type="checkbox"/> N Mech: <input type="checkbox"/> Y <input type="checkbox"/> N		Mech: \$ <u>25,000</u>	
				TOTAL: \$ <u>100,000</u>	

Please utilize the Calculation Aid on the last page of the Additional Information, page 7, as a guide to complete the following calculations and to provide supplemental information for thorough review.

Site Development Information						
Area Description	Existing Sq Ft		New/Added Sq Ft		Total Sq Ft	
	Bldg 1	Bldg 2	Bldg 1	Bldg 2	Bldg 1	Bldg 2
Note: Provide a separate calculation for each distinct area. Attach additional sheets as necessary. Measurements are to the outside surface of the exterior wall.						
a) 1 st Floor conditioned area	<u>2325.0</u>	<u>481.00</u>	<u>0.00</u>	<u>0.00</u>	<u>2325</u>	<u>481.00</u>
b) 2 nd Floor conditioned area	<u>0.00</u>	<u>481.00</u>	<u>1372.00</u>	<u>0.00</u>	<u>1372</u>	<u>481.00</u>
c) 3 rd Floor conditioned area	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>	<u>0</u>	<u>0.00</u>
d) Basement	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>
e) Covered parking (garage or carport)	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>
f) Covered patio, deck, porch, and/or balcony area(s)	<u>0.00</u>	<u>395.00</u>	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>	<u>395.00</u>
g) Other covered or roofed area	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>
h) Uncovered wood decks	<u>35.00</u>	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>	<u>35.00</u>	<u>0.00</u>
Total Building Area (total a through h)	<u>2360</u>	<u>1,357.00</u>	<u>1372</u>	<u>0.00</u>	<u>3732</u>	<u>1,357.00</u>
i) Pool	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>
j) Spa	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>
k) Remodeled Floor Area, excluding Addition / New Construction	<u>2325</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>2325</u>	<u>0</u>
Building Coverage Information						
Note: Building Coverage means the area of a lot covered by buildings or roofed areas, but excludes ground-level paving, landscaping, open recreational facilities, incidental projecting eaves, balconies, and similar features. Pools, ponds, and fountains are not included in this measurement. (LDC 25-1-21)						
Total Building Coverage (sq ft):	<u>3,325.00</u>	% of lot size: <u>27.3100%</u>				
Impervious Cover Information						
Note: Impervious cover is the total horizontal area of covered spaces, paved areas, walkways, and driveways. The term excludes pools, ponds, fountains, and areas with gravel placed over pervious surfaces that are used only for landscaping or by pedestrians. For an uncovered wood deck that has drainage spaces between the deck boards and that is located over a pervious surface, 50 percent of the horizontal area of the deck is included in the measurement of impervious cover. (LDC 25-1-23)						
Total Impervious Cover (sq ft):	<u>3,853.50</u>	% of lot size: <u>31.6509%</u>				
Setbacks						
Are any existing structures on this site a non-compliant structure based on a yard setback requirement? (LDC 25-2-492) <input checked="" type="checkbox"/> Y <input type="checkbox"/> N						
Does any structure (or an element of a structure) extend over or beyond a required yard? (LDC 25-2-513) <input type="checkbox"/> Y <input checked="" type="checkbox"/> N						
Is front yard setback averaging being utilized on this property? (LDC 25-2, Subchapter F, Sec 2.3 or 25-2-778) <input type="checkbox"/> Y <input checked="" type="checkbox"/> N						
Height Information (LDC 25-1-21 or 25-2 Subchapter F, Section 3.4)			Parking (LDC 25-6 Appendix A & 25-6-478)			
Building Height: <u>20</u> ft <u>3</u> in Number of Floors: <u>2</u>			# of spaces required: <u>1</u> # of spaces provided: <u>1</u>			
Right-of-Way Information						
Is a sidewalk required for the proposed construction? (LDC 25-6-353) <input checked="" type="checkbox"/> Y <input type="checkbox"/> N						
*Sidewalks are to be installed on any new construction of a single family, two-family or duplex residential structure and any addition to an existing building that increases the building's gross floor area by 50 % or more.						
Will a Type I driveway approach be installed, relocated, removed or repaired as part of this project? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N						
Width of approach (measured at property line): <u>0.0</u> ft Distance from intersection (for corner lots only): <u>0.0</u> ft						
Are storm sewer inlets located along the property or within ten (10) feet of the boundaries of the property? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N						
(If yes, drainage review is required)						

Subchapter F**Gross Floor Area**

This section is only required for projects located within the Residential Design and Compatibility Standards Ordinance Boundaries as defined and illustrated in Title 25-2 Subchapter F of the Land Development Code. The Gross Floor Area of each floor is measured as the area contained within the outside edge of the exterior walls.

	Existing Sq Ft	New/Added Sq Ft	Proposed Exemption (check article utilized)	Applied Exemption Sq Ft	Total Sq Ft
1 st Floor	2806	0.00			2806
2 nd Floor	481.00	1372			1853
3 rd Floor	0.00	0.00			0.00
Area w/ ceilings > 15'	0.00	0.00	Must follow article 3.3.5	0.00	0.00
Ground Floor Porch* (check article utilized)	395.00	0.00	<input type="checkbox"/> Full Porch sq ft (3.3.3 A) <input checked="" type="checkbox"/> 200 sq ft (3.3.3 A 2)	200.00	195.00
Basement	0.00		Must follow article 3.3.3B, see note below	0.00	0.00
Attic	0.00		Must follow article 3.3.3C, see note below		0.00
Garage** (check article utilized)	0.00	0.00	<input type="checkbox"/> 200 sq ft (3.3.2 B 1)	0.00	0.00
			<input type="checkbox"/> 450 sq ft (3.3.2 A 1 / 2a)		
			<input type="checkbox"/> 200 sq ft (3.3.2 B 2a / 2b)	0.00	0.00
Carport** (check article utilized)	0.00	0.00	<input type="checkbox"/> 450 sq ft (3.3.2 A 3) <input type="checkbox"/> 200 sq ft (3.3.2 B 1)***	0.00	0.00
			<input type="checkbox"/> 450 sq ft (3.3.2 A 1)	0.00	0.00
Accessory Building(s) (detached)	0.00	0.00			0.00
Totals	3,806.00	1372			4854

TOTAL GROSS FLOOR AREA (add Total Sq Ft column) 4854(Total Gross Floor Area + Lot Area) x 100 = 39.87 Floor-To-Area Ratio (FAR)Is a sidewall articulation required for this project? Y ☒ N

(Yes, if a wall, 15' tall or higher, within 9 feet of a side property line extends further than 36 feet in length per article 2.7.1)

Does any portion of the structure extend beyond a setback plane/exemption exhibit (aka "tent")? Y ☒ N

(If Yes, indicate applicable section of Subchapter F and length of protrusion on the drawings.)

*Ground Floor Porch exemption: A ground floor porch, including a screened porch, may be exempted, provided that the porch is not accessible by automobile and is not connected to a driveway, and the exemption may not exceed 200 square feet if a porch has habitable space or a balcony above it.

**Garage and carport exemptions (in relation to primary structure): Exemptions must follow the code as outlined in Title 25-2 Subchapter F 3.3.2. Each amount listed (450 or 200) is the maximum exclusion allowed per the article designated. Note: Article 3.3.2 C. "An applicant may receive only one 450-square foot exemption per site under paragraph A. An applicant who receives a 450-square foot exemption may receive an additional 200-foot exemption for the same site under paragraph B, but only for an attached parking area used to meet minimum parking requirements."

***Ordinance article 3.3.2 B 1 is the only 200 sq ft exemption that may be combined with a 450 sq ft exemption. Otherwise only one 450 exemption or one 200 sq ft exemption may be taken.

Basement exemption: A habitable portion of a building that is below grade may be exempted if the habitable portion does not extend beyond the first-story footprint and is below natural or finished grade, whichever is lower, and it is surrounded by natural grade for at least 50% of its perimeter wall area and the finished floor of the first story is not more than three feet above the average elevation at the intersections of the minimum front yard setback line and the side property lines

Habitable Attic exemption: A habitable portion of an attic may be exempted if: 1) The roof above it is not a flat or mansard roof and has a slope of 3 to 12 or greater, 2) It is fully contained within the roof structure, 3) It has only one floor, 4) It does not extend beyond the footprint of the floors below, 5) It is the highest habitable portion of the building, or a section of the building, and adds no additional mass to the structure, and 6) Fifty percent or more of the area has a ceiling height of seven feet or less.

GENERAL CONDITIONS.

- These documents comprise a portion of a contract between the Owner and the General Contractor. No contract is implied or stated between the Owner and any other party, nor between the Architect and any party.
- No set of contract documents is able to contain all the information required to construct a project. Interpretation by the General Contractor is required. By use of these documents, both the Owner and the General Contractor assent to this understanding of the nature of contract documents.
- The General Contractor is responsible for the provision of minor details and appurtenances not shown in the contract documents.
- The General Contractor and his/her subcontractors are responsible for the final design of the HVAC, plumbing, and electrical systems.
- The General Contractor may not revise or modify the contract documents, in whole or in part, without the prior approval of the Owner. Consultation with the Architect beforehand is strongly recommended.
- The General Contractor may not modify the plans, elevations, or site plan shown in the contract documents without obtaining Architect consultation and Owner approval beforehand.
- Should the Owner request changes to the contract documents, the General Contractor is responsible for ensuring that the changes do not result in a built condition that does not comply with codes and/or regulations. Consultation with the Architect and/or an Inspector is highly recommended.
- The Architect is not an Inspector and is not liable for the General Contractor's failure to execute the Work in accordance with the contract documents and/or in conformance with any and/or all applicable codes, laws, statutes and regulations.
- The Owner shall not be held liable nor be made to pay for the remediation of work judged substandard and/or rejected by the Architect, the Owner, and/or any Inspector (municipal or third party). The Owner alone reserves the right to accept work judged substandard by either the Architect or the Owner. Should the Owner elect to accept substandard work, the Owner reserves the right to request monetary credit and/or a reduction in the contract sum.
- The Owner and/or the Architect shall be permitted to access the project site, in part and as a whole, at any reasonable time without prior notice. If the project site, in part or as a whole, is locked or otherwise secured, the Architect shall coordinate with the General Contractor to gain access. Neither the Owner nor the General Contractor shall be held liable for the consequences of the Architect's presence on site unless said consequences arise from an unsafe or otherwise substandard project condition.
- The General Contractor is solely responsible for obtaining and maintaining all such bonding, sureties, and insurances such as may be required to shield the Owner from claims pertaining to the General Contractor's and/or Subcontractors' execution of the Work and their respective conduct on-site.
- The General Contractor is solely responsible for ensuring that working conditions on-site are safe and comply with all relevant rules, laws, codes, and standards. Likewise, the General Contractor is solely responsible for ensuring that all personnel on-site conduct themselves in a safe and prudent manner at all times, whether or not the General Contractor is present.

NOTES REGARDING CODES, REGULATIONS, STANDARDS, PERMITS AND INSPECTIONS.

- The General Contractor is responsible for ensuring built compliance with all codes, regulations, and standards such as may be in force. These codes include but may not be limited to:
2015 International Energy Conservation Code, 2012 Amended National Electrical Code
2012 International Fire Code, 2012 Uniform Mechanical Code
2012 Uniform Plumbing Code, 2012 International Residential Code
- Should the General Contractor become aware of a condition shown or depicted in the contract documents that would result in a violation of any code or regulation listed above, the General Contractor shall contact the Architect immediately for resolution.
- The General Contractor shall be responsible for obtaining any permit not provided beforehand by the Owner.
- The General Contractor and/or his/her subcontractors shall be responsible for coordinating all required inspections.
- The Owner and/or the General Contractor shall commission a third-party inspector. Failure on the part of the Owner and/or the General Contractor to retain a third-party inspector shall release the Architect from any and all liability for the project.
- Neither the Owner nor the Architect shall be considered to act in the role of an Inspector. While the Owner and the Architect shall endeavor to alert the General Contractor to any perceived or observed defect in the construction, failure to do so shall not in any way relieve the General Contractor from his/her obligation to ensure that the built work is safe, of good quality, and compliant with all relevant codes and regulations.
- The General Contractor is responsible for ensuring that all work, whether performed by subcontractors or by the General Contractor him/herself, is of good workmanship and quality.

NOTES REGARDING VISIBILITY REQUIREMENTS.

(Ref: City of Austin ordinance #20140130-021 and City of Austin amendments to section R320 to the 2012 International Residential Code)

- Bathroom(s) on the first floor shall receive an entry door with minimum 30" clear opening.
- Bathroom(s) on the first floor shall receive 2x6 wood blocking parallel with floor (except directly behind lavatories). Blocking shall be installed such that the centerline of blocking is 34" above finish floor level.
- Switches and thermostats on all floors shall be located no greater than 45" (@ junction box centerline) above finish floor level.
- Power receptacles and data ports on all floors shall be located no less than 18" (@ junction box centerline) above finish floor level.
- At least one entrance to the first floor of the dwelling shall have a "no-step" entrance with a beveled threshold of 1/2" or less.
- A visible route shall be provided from public way to the no-step entrance of each dwelling unit. Said visible route shall be a minimum 36" in clear width and shall have a maximum cross-slope of 1:50.

NOTES REGARDING TREE PROTECTION.

- All trees 19" in trunk diameter and greater at a height of 4'-6" above grade are protected by municipal ordinance.
- No protected tree shall be removed without a permit.
- To the extent that space allows, all protected trees shall be surrounded with a chain-link fence per City of Austin standard details 610S-2 and 610S-4, installed at a distance of 12 times the trunk diameter from the center of the tree. (EO: The protective fence for a 20" tree shall be installed 20'-0" from the center of the tree.)
- Where space does not allow extent of a protective fence described in (3) above, the protective fence shall be installed as far as possible from the trunk and 2x4 wood boards shall be strapped to the trunk for a distance of at least 8' above the ground per City of Austin standard detail 610S-4.
- All excavation within critical root zones shown on site plan shall occur under the guidance and supervision of a licensed private arborist.

NOTES REGARDING SPECIFIC PORTIONS OF THE WORK.

- FOUNDATIONS.**
 - All concrete slab-on-grade and pier-beam foundations shall be engineered by a structural engineer licensed in the state of Texas.
 - All concrete intended for exposure as flooring shall be protected during construction.
- FRAMING.**
 - All wall framing shall be engineered by a structural engineer licensed in the state of Texas.
 - All wall studs shall be sized as indicated otherwise in architectural or engineering drawings.
 - All floor and roof trusses shall be engineered by a structural engineer licensed in the state of Texas.
- SHEATHING AND DECKING.**
 - All wall sheathing shall be, at a minimum, 7/16" OSB unless indicated otherwise on engineering drawings.
 - All floor decking shall be, at a minimum, 1-1/4" OSB "screwed and glued" unless indicated otherwise on engineering drawings.
 - All roof decking shall be, at a minimum, 5/8" OSB with a radiant barrier facing downward (unless spray-foam insulation is to be used).
- AIR AND WATER BARRIERS.**
 - All exterior wall sheathing shall receive a vapor-permeable air+water barrier equal to or better than Fortifiber HydroTex.
 - All sheathing at window and door assemblies shall be shingled over head and jamb fins and shall be further sealed with compatible self-adhered membrane flashing.
 - All roof sheathing shall receive an ice-water shield.
- INSULATION, SEALANTS and VENTILATION.**
 - All exterior wall and roof assemblies shall receive insulation consisting of one of the following types (SELECTED PRODUCT IS INDICATED IN SPECIFICATIONS ON SHEET G003):
.....1) Open-cell spray foam insulation; or
.....2) Blown-in batt insulation; or
.....3) Paperless fiberglass batt insulation.
 - All insulation shall comply with the following minimum thermal-performance requirements:
.....1) Walls R-19
.....2) Walls R-35
.....3) Rafters R-30
 - All walls surrounding bathroom areas shall receive paperless fiberglass batt insulation.
 - Where blow-in batt insulation or fiberglass batt insulation is to be used, roof cavities shall be ventilated by means of continuous perforated cement-board soffits and ridge vents.
 - All penetrations through exterior cladding shall be sealed with silicone sealant to prevent water intrusion.
 - All crawlspaces beneath pier-beam foundations shall be ventilated by means of 6" diameter round vents with insect screens.
- EXTERIOR CLADDING and TRIM.**
 - All exterior cladding shall be installed in strict accordance with manufacturers' instructions and placed per architectural elevations.
 - All cement-board cladding shall be smooth with no false wood grain.
 - All cement-board plank siding shall be 6" or 12" exposure, as noted on architectural elevations.
 - Where no exposure size is given, 6" horizontal exposure shall be assumed.
 - All joints in cement-board plank siding shall be staggered and puttied before painting.
 - All vertical cement-board paneling shall be made from 4' x 8' sheets of smooth cement-board with no false wood grain, with battens at 24" o.c. unless otherwise noted.
 - All wood siding shall be clear-sealed cedar or redwood shingle siding, 6" exposure unless noted otherwise. Where no exposure size is given, 6" horizontal exposure shall be assumed.
 - All stucco cladding shall be 3-coat portland-cement stucco (NO EPS OR SYNTHETIC STUCCO) on paper-backed metal lath with the 3rd coat consisting of an elastomeric color coating.
 - Unless noted otherwise, all stucco cladding shall receive control joints as per the following:
.....1) VERTICAL JOINTS: at a spacing of 32' maximum in plan and at all window+door corners.
.....2) HORIZONTAL JOINTS: at the top of each of every floor level.
 - All stone cladding shall be Austin-chalk or Lueders limestone masonry, random ashlar bond, nominal 4-1/2" thickness.
 - All exterior trim shall be RealTrim, nominal 1x4 size, smooth all sides (SxS) with no false wood grain.
 - All exterior fasciae shall be cement-board or RealTrim, nominal 1x6 size, smooth all sides (SxS) with no false wood grain.

NOTES REGARDING SPECIFIC PORTIONS OF THE WORK (continued).

- ROOFING.**
 - All roofing shall consist of one of the following assemblies (SELECTED PRODUCT IS INDICATED ON G003):
.....1) Standing-seam metal roofing, 1-1/2" minimum seam, dark bronze finish
.....2) 30-year composition-shingle roofing
.....3) Walkable PVC roofing or
.....4) Torch-down asphaltic rolled roofing.
 - All roof decks above conditioned space shall receive walkable PVC roofing.
 - All balconies and uncovered decks above covered porches shall receive walkable PVC roofing.
- DECKS and BALCONIES.**
 - All roof decks above conditioned space shall receive one of the following deck surfaces (SELECTED PRODUCT IS INDICATED ON G003):
.....1) Synthetic-wood decking on treated-wood sleepers; or
.....2) Walkable PVC roofing.
 - All balconies and uncovered wood decks above covered porches shall receive one of the following deck surfaces (SELECTED PRODUCT IS INDICATED ON G003):
.....1) Synthetic-wood decking on treated wood deck structure per structural engineer; or
.....2) Walkable PVC roofing.
 - All sheathing and structure used under synthetic wood decking shall be pressure-treated without exception.
 - All thrust ceramic or porcelain tile used on decks and balconies shall be installed upon a suitable crack-isolation membrane.
 - All roof decks, balconies, and uncovered roof decks above covered porches shall receive steel railings as per the following (SELECTED PRODUCT IS INDICATED ON G003):
.....1) 36" minimum height balustrade comprised of 1.5" square steel tubing attached to front of exterior fascia or balcony, with stainless-steel cable railing at 3.5" vertical separation o.c.; or
.....2) 36" minimum height parapet with continuous metal coping on top.
- FLASHINGS, COPINGS, GUTTERS, and SCUPPERS.**
 - All flashings and counterflashings shall be galvanized steel unless noted otherwise.
 - All joints between flashings shall be lapped and sealed unless acceptable per industry standard based on specific conditions.
 - All copings on parapets and deck railings shall be galvanized steel, dark-bronze finish, unless noted otherwise.
 - All copings on parapets shall be continuous with sealed lap joints (NO BUTT JOINTS, EVEN IF SEALED).
 - All low eaves on shed, gable, and hip roofs shall receive 6" gutters unless noted otherwise. Where roof plan does not show gutters, 6" gutter shall be assumed.
 - All gutters shall be either dark-bronze finish to match metal roof or painted to match fascia.
 - All downspouts shall be either dark-bronze finish to match gutter or painted to match cement-board siding.
 - Downspouts shall be provided as per the following:
.....1) WALLS LESS THAN 20' IN LENGTH: One downspout
.....2) WALLS GREATER THAN 20' IN LENGTH: One downspout per 20' of length, minimum two per wall
 - Downspouts shall be located near corner at ends of walls and centered in middle of walls unless specifically noted otherwise on architectural elevations. Where downspouts are not shown, downspouts shall be located as per this note.
 - Through-wall scuppers shall be provided at all parapets.
 - Through-wall scuppers shall be 6" wide by 6" tall and shall be galvanized-metal or TPO-coated metal.
 - Scuppers shall be located as indicated in architectural elevations and roof plans. Where no scuppers are indicated in architectural elevations or roof plans, scuppers shall be located as follows:
.....1) PARAPETS GREATER THAN 10' IN LENGTH: One scupper, in center
.....2) PARAPETS GREATER THAN 10' IN LENGTH: One scupper per 10' of wall length, minimum two per scupper.
 - All scuppers shall be installed such that roof and/or deck material behind parapet shingles on top of back of scupper.
 - All under-sides of copings and gutter attachments to cladding shall be sealed with silicone sealant.
 - All through-wall scuppers shall be sealed at all junctions with exterior wall.
- WINDOWS.**
 - All windows shall be one of the following specifications (SELECTED PRODUCT IS INDICATED ON G003):
.....1) VINYL, In-mounted windows, Andersen 100 series or better; or
.....2) ALUMINUM-CLAD WOOD, In-mounted windows, Andersen 200 series or better.
 - All sleeping rooms shall have at least one window rated for egress by the manufacturer.
 - All windows shall be tempered as indicated in the architectural plans. Where no tempering requirements are indicated in architectural plans, windows meeting ANY of the following conditions shall be tempered:
.....1) All windows in showers or baths with head height at or below 96" AFF.
.....2) All windows within 24" of the arc of any swinging door.
.....3) All windows within 24" of the jamb of any sliding door.
.....4) All windows with sill heights below 12" AFF.
.....5) All windows with any single pane of glazing larger than 36 square feet in area.
 - All awning and casement windows whose sill height is lower than 24" above finish floor shall be fitted with window-opening control devices (WOCODs).
 - All windows shall be listed as compliant with current energy codes and shall have a maximum U-factor of 0.40 without exception.
 - The General Contractor is responsible for ensuring that thermal performance is compliant with all relevant energy codes and the requirements of these contract documents.

NOTES REGARDING SPECIFIC PORTIONS OF THE WORK (continued).

- EXTERIOR DOORS.**
 - All exterior doors shall be one of the following:
.....1) SOLID-CORE WOOD SWINGING DOORS with tempered glazing;
.....2) STEEL SWINGING DOORS with tempered glazing; or
.....3) ALUMINUM SLIDING DOORS with tempered glazing.
 - All exterior swinging doors shall receive lever hardware (NO KNOBS).
- INTERIOR DOORS.**
 - All interior doors shall be one of the following:
.....1) SOLID-CORE WOOD DOORS with flat paneling; or
.....2) SOLID-CORE WOOD DOORS with 5-panel (5x1) paneling.
 - Doors shall be paint-grade unless noted otherwise.
 - Swinging doors shall receive lever hardware (NO KNOBS).
- TRIM AND CASINGS.**
 - All interior baseboards shall be one of the following assemblies:
.....1) 1x4 flat MDF or paint-grade wood with no quarter-round; or
.....2) 1x4 stain-grade wood with no quarter-round.
 - All interior door trim shall be one of the following assemblies:
.....1) 1x4 flat MDF or paint-grade wood; or
.....2) 1x4 stain-grade wood.
- FLOORING.**
 - All flooring shall be one of the following assemblies:
.....1) Clear-sealed polished concrete, Level 4 finish
.....2) Engineered-wood plank flooring, finish as per OWNER.
.....3) Carpet, color as per OWNER.
.....4) Ceramic tile, 12x12 or as selected by OWNER; or
.....5) Ceramic tile, 1" diameter white penny tile with black grout.
 - All interior tile shall be installed upon a crack-isolation membrane.
- DRYWALL AND BACKING.**
 - All interior drywall at walls shall be 1/2" gypsum board except at common walls between duplex units.
 - All interior drywall at common walls between duplex units shall be 5/8" TYPE X gypsum board.
 - All interior drywall at ceilings shall be 5/8" gypsum board.
 - All drywall at WET AREAS (baths, utility rooms) shall consist of one of the following:
.....1) Exterior-grade fiberglass-backed gypsum board, installed at full height of wall; or
.....2) Cementitious backer board, installed at full height of wall.
- PAINTING and TEXTURING.**
 - All exterior cladding suitable for painting (stucco, cement board, fasciae and trim) shall receive exterior-grade latex paint. Color shall be WHITE unless otherwise selected by OWNER.
 - All exterior metals suitable for painting (railings, columns, beams, balustrades) shall receive exterior-grade latex paint intended for use on metal. Color shall match roof unless otherwise selected by OWNER.
 - All interior walls, trim, casings, and ceilings shall be receive no-VOC latex paint. Color shall be WHITE unless otherwise selected by OWNER.
 - All interior walls and ceilings shall receive orange-peel texture.
- CABINETS and COUNTERTOPS.**
 - All interior cabinets and shelving shall consist of one of the following assemblies:
.....1) Paint-grade wood or MDF cabinetry; or
.....2) Stain-grade wood cabinetry.
 - All cabinet shall be full-flush-overlay cabinets with concealed (European) hinges and drawer extensions.
 - All drawer fronts shall receive brushed-nickel linear pulls installed as follows:
.....VERTICAL DIMENSION: CL of pull 1" below top of drawer front
.....HORIZONTAL DIMENSION: Centered on width of drawer front
 - All door fronts shall receive brushed-nickel linear pulls installed as follows:
.....VERTICAL DIMENSION: CL of pull 1" below top of door front (at BASE) or 1" above top of door front (at UPPIERS)
 -HORIZONTAL DIMENSION: Centered on width of door front
 - All countertops shall be either GRANITE or SOLID-SURFACE as selected by OWNER. Where OWNER has made no selection, countertops shall be white Silestone
- ELECTRICAL SYSTEMS.**
 - Electrical systems shall be designed by master electrician.
 - A whole-house surge protector shall be installed unless deleted by OWNER.
 - Location of meters and load center shall be determined by master electrician.
- PLUMBING SYSTEMS.**
 - Plumbing systems shall be designed by master plumber.
 - Interior cutoff valve shall be flexible (FEC) system with manifold.
 - A master cutoff valve shall be installed at manifold unless deleted by OWNER.
 - All piping in exterior walls shall be insulated.
- HVAC SYSTEMS.**
 - HVAC systems shall be designed by master HVAC technician.
 - HVAC systems shall consist of one of the following:
.....1) Heat pump compliant with current energy code
.....2) Gas furnace with 10% makeup air compliant with current energy code
.....3) Ductless split system compliant with current energy code.
 - All HVAC systems shall incorporate makeup air as required by energy code

DISCLAIMERS

This document is issued under the seal of WILLIAM LAWRENCE HODGE, Texas architect #19074. This document is not for regulatory approval, pricing or construction unless the seal and signature of the Architect are visible. This document is not approved for construction purposes. It is intended for informational use only. A set of construction documents can contain all information required to construct a project. Interpretation by a contractor is required. All sheets are complementary. That which is shown in one sheet, applies to all sheets in this set by reference. The information in G001 through G007 (inclusively) apply to every sheet in this set and to every contractor and/or subcontractor that may perform work on this project. Unlabeled sheets listed elsewhere in this set is incomplete and INVALID FOR CONSTRUCTION.

SEAL OF ARCHITECT WILLIAM LAWRENCE HODGE, TEXAS ARCHITECT #19074

ISSUE DATE

SPECIFICATIONS (CONFIRM WITH OWNER PRIOR TO INSTALLATION).

Element	Material
Foundation	Slab-on-grade, engineered by others
Framing, walls	2x4 / 2x6 wood studs, Southern Yellow Pine #2 or better
Framing, floors	Pre-fabricated roof trusses, engineered by others
Framing, roofs	Pre-fabricated roof trusses, engineered by others
Sheathing, walls	7/16" minimum oriented strand-board
Decking, floors	1-1/8" oriented strand-board, mechanically fastened and adhered
Decking, roof	3/4" minimum oriented strand-board
Water-resistive barrier	Fortifiber Hydro-Tex water-resistive barrier
Insulation	Fiber-glass batt insulation, R19 at walls, R38 at roofs
Siding	Cement-board plank siding + stucco. REF: ELEVATIONS
Trim, exterior	RealTrim or similar, nominal 1x4 size, S4S (smooth four sides)
Roofing	Standing-seam metal roofing on ice+water shield + walkable PVC
Windows	Vinyl, Andersen 100 series or better, BLACK
Doors, exterior	Vinyl or fiberglass, tempered as req'd, Andersen or better
Flooring, general	Engineered wood flooring (OR OWNER SELECTION)
Flooring, baths	Ceramic "penny" mosaic tile, black grout (OR OWNER SELECTION)
Flooring, kitchens	Engineered wood flooring (OR OWNER SELECTION)
Flooring, utility	Porcelain tile, 12" x 12" (OR OWNER SELECTION)
Drywall, walls, general	1/2" gypsum board
Drywall, walls, wet areas	Cementitious backer board OR glass-mat-faced gypsum board
Drywall, ceilings	5/8" gypsum board
Tile, baths + kitchens	Subway tile, 3" x 6", white, stack bond
Trim, baseboards	1x4 wood, flat profile painted NO QUARTER-ROUND
Trim, casings	1x4 wood, flat profile painted
Doors, interior	Solid-core wood doors (NO PANELING), painted
Door hardware, exterior	Schlage Century One keyed handleset w/ Latitude lever
Door hardware, interior	Schlage Plymouth Style privacy/passage sets, Latitude levers
Cabinetry	Paint-grade MDF or wood cabinetry, full-flush overlay (NO EXPOSED FACE FRAMES), European style hinges, flat panel doors (no stile-and-rail paneling)
Countertops	Solid surface countertops, white (OWNER SELECTION)

APPLIANCE SCHEDULE (CONFIRM WITH OWNER PRIOR TO PURCHASE).

Appliance	Specification
Refrigerator+freezer	GE Cafe series Energy Star 22.1 cu ft, counter depth French-door refrigerator, stainless steel, model no. CYE22TSHSS
Range	GE Cafe series 30" free-standing range with storage drawer, stainless steel, model no. GCS975SEDS
Microwave+vent hood	GE Cafe series 1.7 cu ft, convection over-the-range microwave oven, stainless steel, model no. CVM179OSSSS
Dishwasher	GE Cafe series stainless interior built-in dishwasher with hidden controls, model no. CDT765SSFS
Washer	GE Energy Star front-load washer, model no. GFWM1200HWW
Dryer	GE front-load electric dryer, model no. GFDM120EDWW, stacked
Disposal	Waste King Legend Series 1 HP disposal, model no. 8000TC

PLUMBING SCHEDULE (CONFIRM WITH OWNER PRIOR TO PURCHASE).

Fixture	Specification
Kitchen sink	Kohler Vault undermount sink, single-hole, model no. K-3839-1
Kitchen faucet	Kohler Sensate electronic pull-down kitchen sink faucet K-72218
Bathroom sink	Kohler Purist widespread faucet K-14406-3, cross handles
Bathroom faucet	Kohler Purist widespread faucet K-14406-3, cross handles
Bathtub	Kohler Villager bath K-715 (left drain) or K-716 (right drain)
Bath+shower head+faucet	Kohler Purist bath+shower valve trim with cross handles and 90 ° spout, model no. K-T14421-3E, with Rite-Temp valve with diverter and stops, model no. K-11748-KS
Toilet	Kohler Persuade dual-flush toilet, model no. K-3654 w/ Brevia elongated toilet seat, model no. K-4774

ELECTRICAL SCHEDULE (CONFIRM WITH OWNER PRIOR TO PURCHASE).

Fixture	Specification
Ceiling fan w/ light kit	Fanimation Involution two-bladed ceiling fan, satin nickel, FP4520SN with satin-nickel blades, B4500SN, and light kit, LK4520SN
Ceiling fan, wet locations	Fanimation Zenix ceiling fan, satin nickel, FP4640SN
Ceiling-mounted light	Lighting Inc. one-light ceiling mount, item # 335157, E26 LED lamp
Recessed ceiling light	Lighting Inc. air-tight IC, item # 605638, E26 LED lamp
Recessed ceiling light trim	Lighting Inc. 6" pro-optic LED trim, item # 725403, white, E26 LED lamp
Pendant light, small	Lighting Inc. one-light LED pendant, item # 754421, G4 LED lamp
Pendant light, large	Lighting Inc. one-light LED pendant, item # 539505, E26 LED lamp
Exterior light	Lighting Inc. one-light outdoor fixture, item # 336638, E26 LED lamp
Vanity light	Lighting Inc. two-light vanity fixture, item # 300295, E26 LED lamp

MECHANICAL SCHEDULE (CONFIRM WITH OWNER PRIOR TO PURCHASE).

Fixture	Specification
HVAC system	Trane gas furnace with 90% makeup air
Exhaust fan	Broan model 684 exhaust fan

DISCLAIMERS.

This document is issued under the seal of WILLIAM LAWRENCE HODGE, Texas architect #19074. This document is not for regulatory approval, pricing or construction unless the seal and signature of the architect are visible. This document is not approved for construction unless a signed and sealed approval is visible. No set of construction documents can contain all information required to construct a project. Interpretation by a contractor is required. All sheets are complementary. That which is shown in one sheet, applies to all sheets in this set by reference. The information in G001 through G007 (inclusive) apply to every sheet in this set and to every contractor and/or subcontractor that may perform work on this project. Unless otherwise indicated, the information shown on all sheets is intended to be complete and accurate and is not to be construed as an invitation for construction. This set is incomplete and INVALID FOR CONSTRUCTION.

SEAL OF ARCHITECT.

SEAL OF MUNICIPAL APPROVAL.



OCHONA
Development + Architecture




























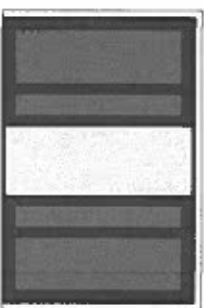




































REMODEL TO PRIMARY HOUSE AT
1004 SPENCE STREET
AUSTIN, TEXAS 78702

ISSUE DATE
15 Mar 2018

SHEET TYPE
Specifications.

G003

DOOR SCHEDULES.

SWINGING ENTRY DOORS.		SWINGING PATIO DOORS.		EXTERIOR SLIDING DOORS.				INTERIOR SWINGING DOORS.						INTERIOR BYPASS DOORS.												
		EN3680	EN(2)3680			PA3680	PA(2)3680			SL(2)3680	SL(3)3680															
		EN3696	EN(2)3696			PA3696	PA(2)3696			SL(2)3696	SL(3)3696															
GARAGE DOORS.				INTERIOR POCKET DOORS.																						
		GA3680	GA21680			PD2480	PD3280			PD(2)2480		PD(2)3280		PD(2)3680												
		GA3696	GA21696			PD2496	PD3296			PD(2)2496		PD(2)3296		PD(2)3696												
				BARN DOORS.																						
		BD2480				BD(2)2480		BD(2)3680																		
		BD2496				BD(2)2496		BD(2)3696																		

01

This is a STANDARD schedule and not all doors and windows indicated above may be utilized in this specific project. Head heights given are to be measured to the top of the window and/or door unit.

05

When the Owner's chosen window and/or door manufacturer has standard unit sizes that differ from the unit sizes given above, it is the sole responsibility of the Owner and the General Contractor to coordinate egress and tempering requirements such that the built work complies with the intent of this document.

06

Individual manufacturers have standard rough-opening requirements that differ from manufacturer to manufacturer. It is the sole responsibility of the General Contractor to coordinate rough openings for windows and/or doors with the requirements of the Owner's chosen window and/or door manufacturers.

07

All individual windows within MIXED WINDOW UNITS shall be TIGHT-MULLED in the FACTORY. NO MULLING ONSITE

02

Head heights given are to be measured to the top of the window and/or door unit.

03

Unit widths and heights are nominal and general.

04

Individual manufacturers may have standard unit sizes that differ from the unit sizes given above.

DOOR DESIGNATION LEGEND.

DOOR TYPE:
EN Entry door
PA Patio door
SL Exterior sliding door
GA Garage door
SD Swinging door
BP Bypass door
PD Pocket door
BD Barn door

XXXX(X)XXXX

NUMBER OF LEAVES
(if more than one leaf)

WIDTH OF DOOR LEAF
(NOMINAL)
(in INCHES)
E.G.: 30 = 30 inches

HEIGHT OF DOOR LEAF
(NOMINAL)
(in INCHES)
E.G.: 80 = 80 inches

DISCLAIMERS.

This document is issued under the seal of WILLIAM LAWRENCE HODGE, Texas architect #19074. This document is not for regulatory approval, pricing or construction unless the seal and signature of the Architect are visible. The document is not approved for construction until the set of construction documents can contain all information required to construct a project. Interpretation by a contractor is required. All sheets are complementary. That which is shown in one sheet, applies to all sheets in this set by reference. The information in G001 through G007 (Inclusive) apply to every sheet in this set and to every contractor and/or subcontractor that may perform work on this project. Unusual circumstances may arise during the project. All sheets related thereto, this set is incomplete and INVALID FOR CONSTRUCTION.

SEAL OF ARCHITECT

WILLIAM LAWRENCE HODGE
REGISTERED ARCHITECT
STATE OF TEXAS
#19074

ISSUE DATE
15 Mar 2018

0 1 2 3 4 8
GRAPHIC SCALE (in feet)

OCHONA

Development + Architecture




























































REMODEL TO PRIMARY HOUSE AT
1004 SPENCE STREET
AUSTIN, TEXAS 78702

15 Mar 2018

SHEET TYPE
Door Schedules.

G008

WINDOW SCHEDULES.

FIXED WINDOWS.			SLIDING WINDOWS.			CASEMENT WINDOWS.		SASH WINDOWS.		MIXED WINDOWS.	
 PW1212@80 PW1212@96	 PW2412@80 PW2412@96	 PW3612@80 PW3612@96	 PW4812@80 PW4812@96	 PW6012@80 PW6012@96	 PW7212@80 PW7212@96	 SW3612@80 SW3612@96	 SW4812@80 SW4812@96	 SW6012@80 SW6012@96	 SW7212@80 SW7212@96		
 PW1224@80 PW1224@96	 PW2424@80 PW2424@96	 PW3624@80 PW3624@96	 PW4824@80 PW4824@96	 PW6024@80 PW6024@96	 PW7224@80 PW7224@96	 SW3624@80 SW3624@96	 SW4824@80 SW4824@96	 SW6024@80 SW6024@96	 SW7224@80 SW7224@96	 CW2424@80 CW2424@96	 CW3636@80 CW3636@96
 PW1236@80 PW1236@96	 PW2436@80 PW2436@96	 PW3636@80 PW3636@96		 PW7236@80 PW7236@96		 SW3636@80 SW3636@96	 SW4836@80 SW4836@96	 SW6036@80 SW6036@96	 SW7236@80 SW7236@96	 SW9636@80 SW9636@96	 CW3636@80 CW3636@96
 PW1248@80 PW1248@96	 PW2448@80 PW2448@96		 PW4848@80 PW4848@96			 SW4848@80 SW4848@96	 SW6048@80 SW6048@96				
 PW1260@80 PW1260@96	 PW2460@80 PW2460@96			 PW6060@80 PW6060@96		 SW6060@80 SW6060@96	 CW2460@80 CW2460@96	 CW3660@80 CW3660@96	 SH3660@80 SH3660@96	 MW1772@96	 MW1772@96
 PW1272@96	 PW2472@96	 PW3672@96		 PW7272@96		 SW7272@96	 CW2472@96	 CW3672@96	 SH3672@80 SH3672@96	 MW7272@96	
										 MW6060@80 MW6060@96	Upper portion: PW6042 Lower portion: SL6018
										 MW7272@96	Upper portion: PW7254 Lower portion: SL7218
										 MW1772@96	Left portion: SH7236 Right portion: PW7236
										 MW7272@96	Left portion: PW7236 Right portion: SH7236

CUSTOM WINDOWS.

01

This is a STANDARD schedule and not all windows and doors indicated above may be utilized in this specific project.

02

Head heights given are to be measured to the top of the window and/or door unit.

03

Unit widths and heights are nominal and general.

04

Individual manufacturers may have standard unit sizes that differ from the unit sizes given above.

05

When the Owner's chosen window and/or door manufacturer has standard unit sizes that differ from unit sizes given above, it is the sole responsibility of the Owner and the General Contractor to coordinate egress and tempering requirements such that the built work complies with the intent of this document.

06

Individual manufacturers have standard rough-opening requirements that differ from manufacturer to manufacturer. It is the sole responsibility of the General Contractor to coordinate rough openings for windows and/or doors with the requirements of the Owner's chosen window and/or door manufacturers.

07

All individual windows within MIXED WINDOW UNITS shall be TIGHT-MULLED in the FACTORY. NO MULLING ON-SITE.
Refer to paragraph 10 ("Windows") on sheet G002 for tempering requirements.

08

Refer to paragraph 10 ("Windows") on sheet G002 for tempering requirements.

WINDOW DESIGNATION LEGEND.

XXXXXX@XX

WINDOW TYPE:
PW Fixed window
SW Sliding window
CW Casement window
SH Sash window
MW Mixed window
XW Custom window

WIDTH OF UNIT (in INCHES)
E.G.: 30 = 30 inches

HEIGHT OF UNIT (in INCHES)
E.G.: 30 = 30 inches

HEAD HEIGHT OF UNIT (in INCHES)
E.G.: 80 = 80 inches

DISCLAIMERS.

This document is issued under the seal of WILLIAM LAWRENCE HODGE, Texas architect #15072. This document is not for regulatory approval, pricing or construction unless the seal is signed by the architect and is visible. This document is not approved for construction. It utilizes a seal of municipal approval is visible. No interpretation by a contractor is required. All sheets are complementary. That which is shown in one sheet, applies to all sheets in this set by reference. The information in G001 through G007 (inclusive) apply to every sheet in this set and to every contractor and/or subcontractor who utilizes this set. This set is to be used in accordance with the information provided in this set. This set contains the owner sheet and all sheets listed hereon. This set is incomplete and INVALID FOR CONSTRUCTION.

SEAL OF PROJECT.

ISSUE DATE
15 Mar 2018

GRAPHIC SCALE (in feet)
0 2 4 8


REGISTERED ARCHITECT
WILLIAM LAWRENCE HODGE
STATE OF TEXAS
#15072

REMODEL TO PRIMARY HOUSE AT
1004 SPENCE STREET
AUSTIN, TEXAS 78702

OCHONA
SHEET TYPE Window Schedules
15 Mar 2018

G009

N19°36'01"E 93.90'
1004 SPENCE ST
30' R.O.W.

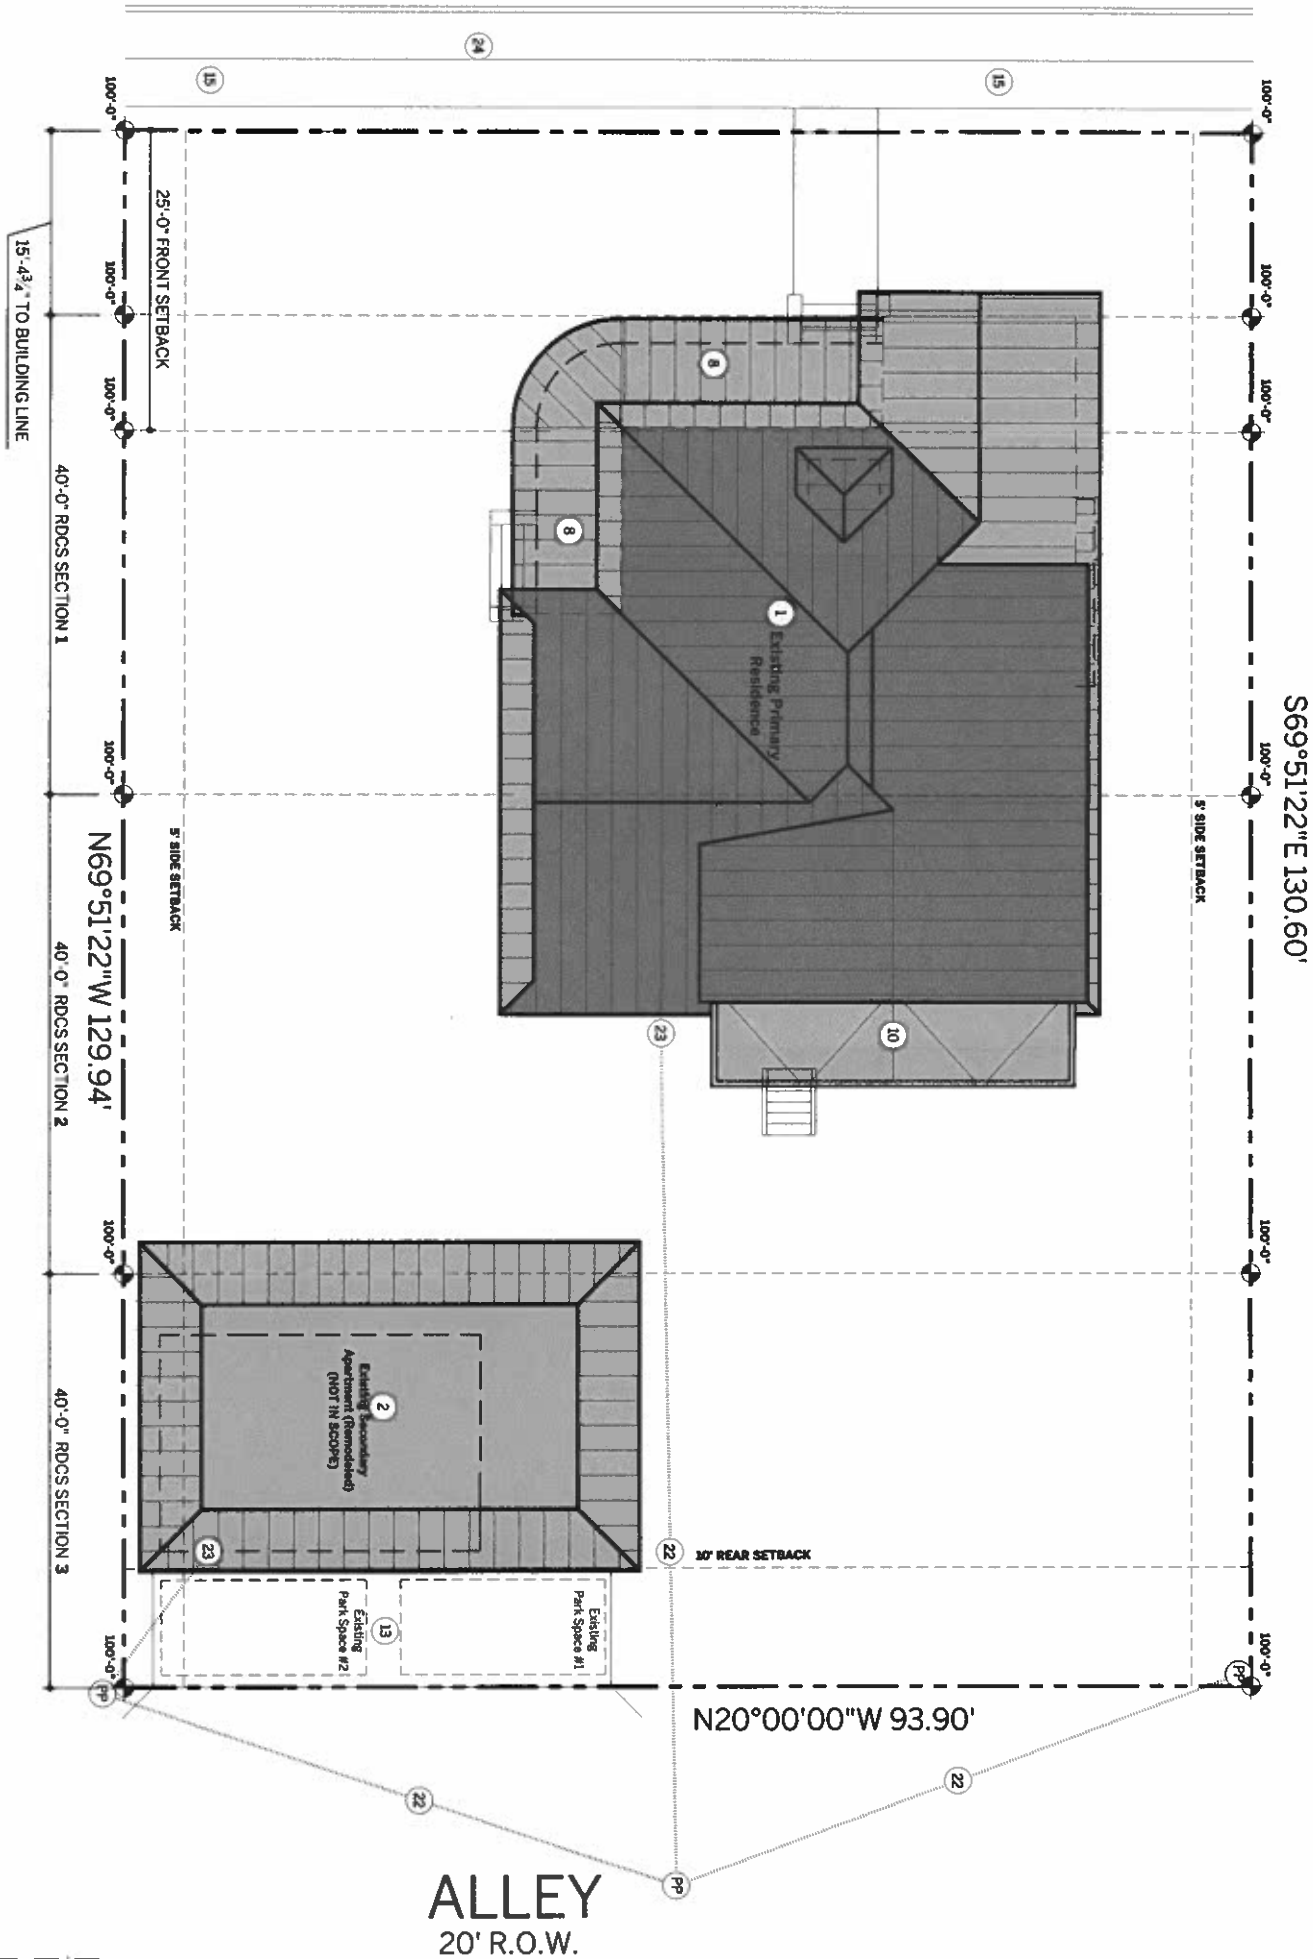

BUILDING 1:
Level 1 = 2448 SF
Level 2 = 1552 SF
Total = 4000 SF

KEYED NOTES (NOT ALL NOTES MAY PERTAIN TO THIS SPECIFIC PROJECT)					
01	Existing primary residence.	11		17	
02	Existing secondary residence.	12		18	
03		13		19	
04		14		20	
05		15		21	
06				22	
07					
08	Existing covered porch w/o deck or habitable space above.	16			
09	New uncovered roof deck.				
10					

CRITICAL ROOT ZONES AT PROTECTED TREES

LIST OF PROTECTED TREES.

#	TRUNK Ø	SPECIES
T1	xx"	<<Species>>

DISCLAIMERS.

This document is issued under the seal of WILLIAM LAWRENCE HODGE, Texas architect #19074. This document is not for regulatory approval, pricing or construction unless the seal and signature of the Architect are visible. This document is not approved for construction unless a seal of municipal approval is visible. No set of construction documents can contain all information required to construct a project. Interpretation by a contractor is required. All sheets are complementary. That which is shown in one sheet, applies to all sheets and vice versa. The information shall be used in accordance with G007 (located apply to every sheet in this set) and to every contractor and/or subcontractor that may perform work on the project. Unless this set contains the cover sheet, and all sheets listed therein, this set is incomplete and INVALID FOR CONSTRUCTION.

SEAL OF ARCHITECT

SEAL OF MUNICIPAL APPROVAL

ISSUE DATE

15 Mar 2018

GRAPHIC SCALE (in feet)


REMODEL TO PRIMARY HOUSE AT 1004 SPENCE STREET AUSTIN, TEXAS 78702

OCHONA
Development + Architecture

ISSUE DATE 15 Mar 2018

SHEET TYPE Site Plan

A000

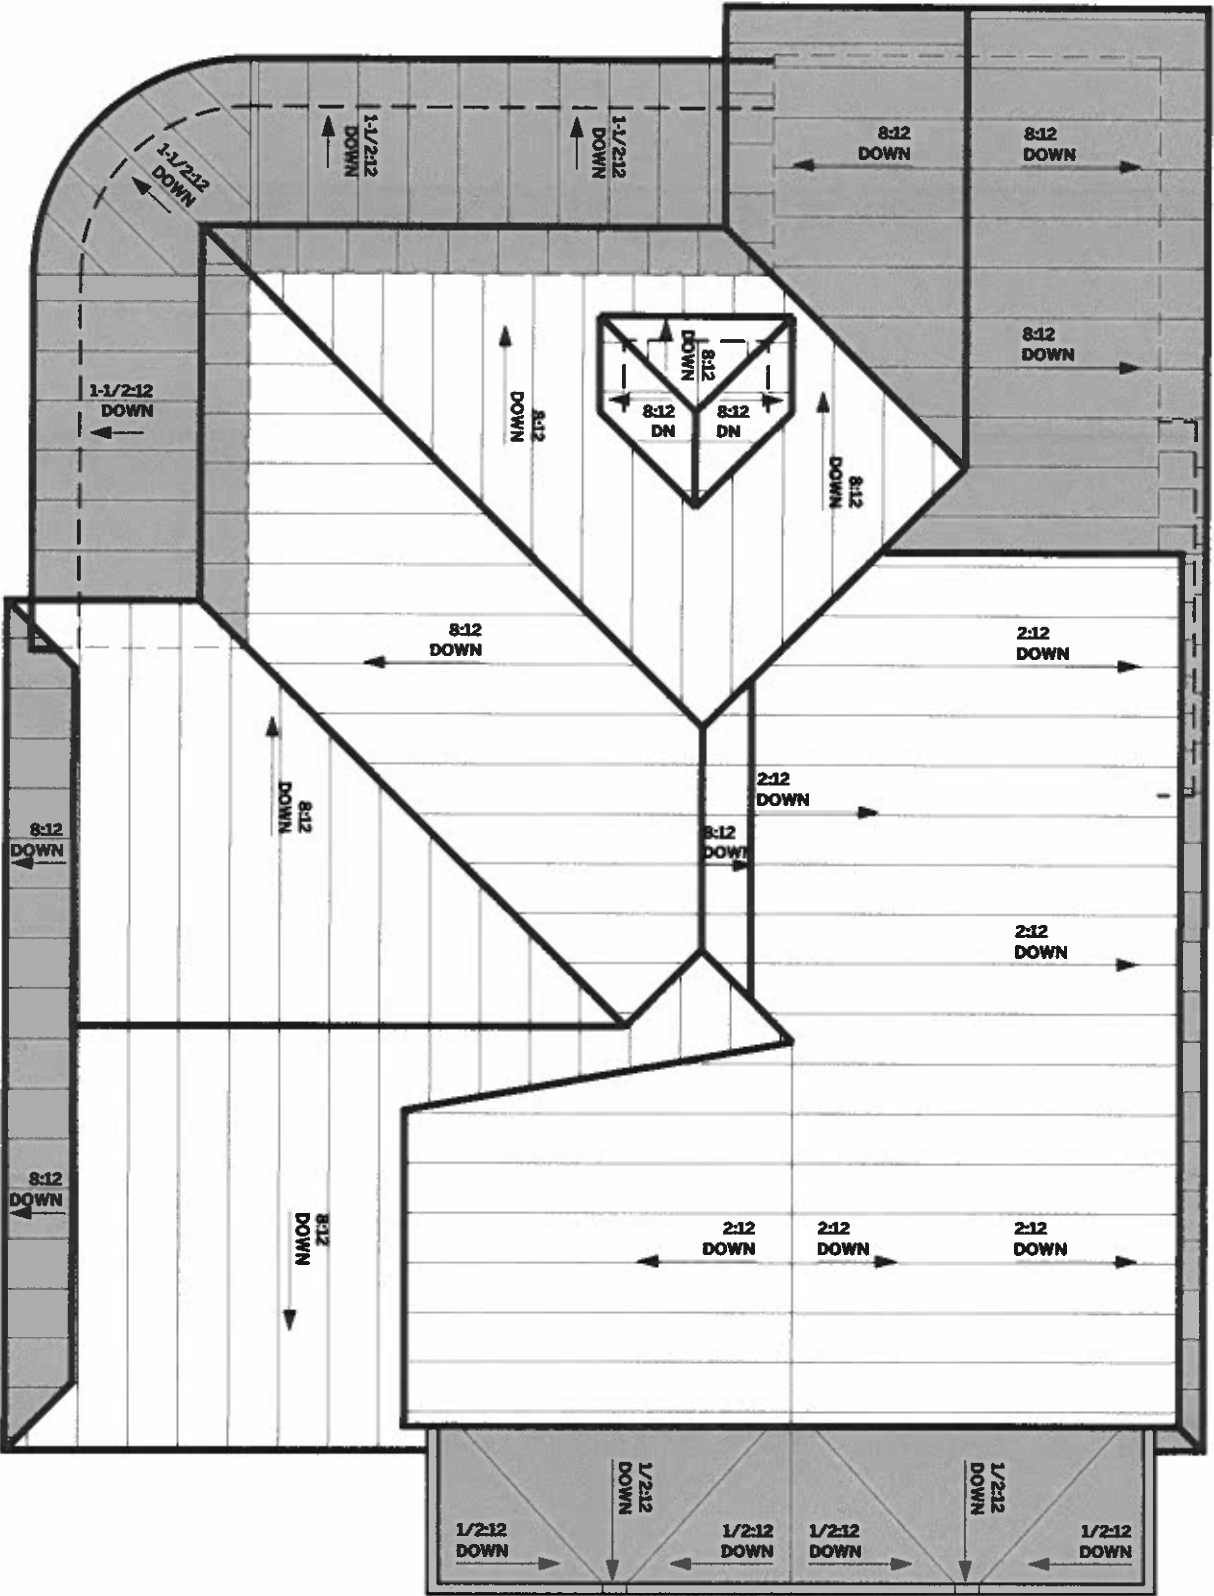

1 Roof Plan

Scale 1/8" = 1'-0" @ 11x17
Scale 1/4" = 1'-0" @ 24x36





KEYED NOTES (NOT ALL NOTES MAY PERTAIN TO THIS SPECIFIC PROJECT).		FRAMING (NOT ALL TYPES MAY PERTAIN TO THIS SPECIFIC PROJECT).		DISCLAIMERS.		SEAL OF ARCHITECT	SEAL OF MUNICIPAL APPROVAL
01	New standing-seam metal roof.			<p>This document is issued under the seal of WILLIAM LAWRENCE HODGE, Texas architect #19074. This document is not for regulatory approval, pricing or construction unless the seal and signature of the architect are visible. This document has not approved the construction of any part of the project. The architect's seal of approval is not a seal of approval for the construction documents. The information in this set of construction documents can contain all information required to construct a project. Interpretation by a contractor is required. All sheets are complementary. That which is shown in one sheet, applies to all sheets in this set by reference. The information in GDOT through GDOT (includes) apply to every sheet in this set and to every contractor and/or subcontractor who may perform work on the project. Unless otherwise noted, the information shown on all sheets listed herein, this set is incomplete and INVALID FOR CONSTRUCTION.</p>			
02	New 30-year composition shingle roof.						
03	New walkable-PVC roof deck.						
04	New metal coping.						
05	New metal scupper.						
06	New metal gutter.						
07	New metal downspout.						
OCHONA		REMODEL TO PRIMARY HOUSE AT 1004 SPENCE STREET AUSTIN, TEXAS 78702		SHEET TYPE		15 Mar 2018	
A104		Roof Plans.		15 Mar 2018			

E. 4. b. (i):

A structure may not extend beyond a setback plane...except for gables or a shed roof, with a total horizontal length of not more than 18 feet on each side of the building, measured along the intersection with the setback plane.

Height shall be measured vertically from the average of the highest and lowest grades adjacent to the building to...for a pitched or hip roof, the gabled roof or dormer with the highest average height.

ARCHITECT'S NOTE: NO PROVISIONS FOR "HABITABILITY OF SPACE" ARE MADE IN THE LANGUAGE CITED ABOVE. IE: ANY ENCLOSED SPACE UNDER THE SHED ROOF MAY PROTRUDE, INCLUDING SPACE USED FOR VERTICAL CIRCULATION.

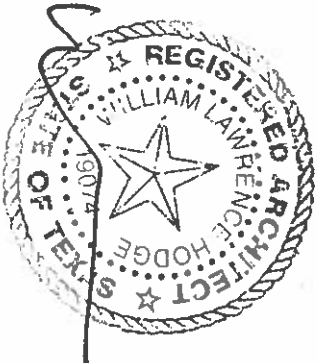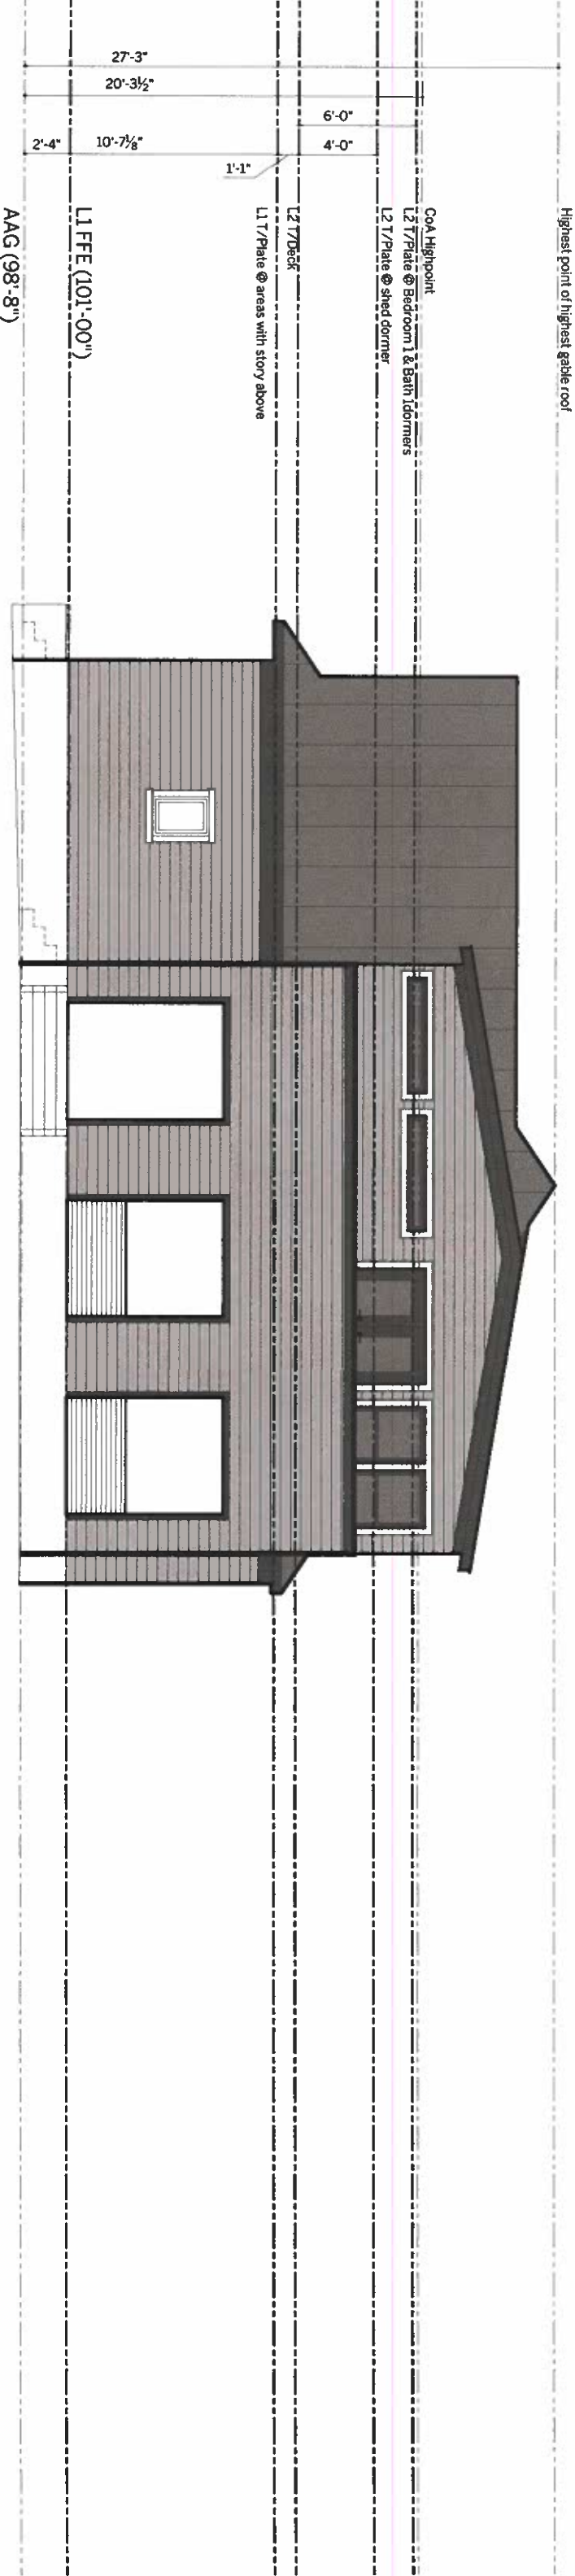

1 Elevation, Bldg 1, Rear

Scale 1/8" = 1'-0" @ 11x17
Scale 1/4" = 1'-0" @ 24x36

KEYED NOTES (NOT ALL NOTES MAY PERTAIN TO THIS SPECIFIC PROJECT).			
01	New standing-seam metal roof.	06	New 3-coat Portland-cement stucco on metal lath. 3rd coat elastomeric.
02	New 30-year composition shingle roof.	07	New 3.5"-thick stone masonry veneer, random-ashlar bond.
03	New horizontally-oriented cement-board siding.	08	New brick masonry veneer, common bond.
04	New horizontally-oriented cement-board siding.	09	New metal coping. Exposure 6".
05	Exposure 12". New vertically-oriented cement-board paneling. Exposure 24" w/ 1x2 battens.	10	New metal railing at exterior porch or deck. Minimum height 36" above finish floor.
DISCLAIMERS.		SEAL OF ARCHITECT.	
This document is issued under the seal of WILLIAM LAWRENCE HODGE, Texas architect #19074. This document is not for regulatory approval, pricing or construction unless the seal and signature of the Architect are visible. This document is not approved for construction until it has been signed and sealed by the Architect. A set of construction documents can contain all information required to construct a project. Interpretation by a contractor is required. All sheets are complementary. That which is shown in one sheet, applies to all sheets in this set by reference. The information in G001 through G007 (inclusive) apply to every sheet in this set and to every contractor and/or subcontractor that may perform work on this project. When the Architect is not present on site, the Architect's seal and signature on this sheet are required. If all sheets listed thereon, this set is incomplete and INVALID FOR CONSTRUCTION.		SEAL OF MUNICIPAL APPROVAL.	
ISSUE DATE		15 Mar 2018	
GRAPHIC SCALE (in feet)		0 1 2 4 8	
OCHONA Development + Architecture		REMODEL TO PRIMARY HOUSE AT 1004 SPENCE STREET AUSTIN, TEXAS 78702	
SHEET TYPE Elevations, Bldg 1		15 Mar 2018	
A202			

