

LEVEL 1 - DEMOLITION PLAN SCALE: 3/16" = 1'-0"

SHEET NOTES


- 1. REFER TO SHEET G1.0 FOR CODE COMPLIANCE.
- 2. REFER TO SHEET G2.0 FOR GENERAL NOTES.
- 3. REFER TO SHEET AS 1.0 FOR VISITABILITY REQUIREMENTS. 4. REFER TO A3.0 SERIES FOR EXTERIOR ELEVATIONS AND ADDITIONAL WINDOW TAGS.
- 5. DO NOT SCALE DRAWINGS.
- 6. VERIFY ALL DIMENSIONS IN FIELD AND REPORT ALL DISCREPANCIES TO THE ARCHITECT FOR RESOLUTION PRIOR TO COMMENCEMENT OF WORK.
- 7. ALL DIMENSIONS TO FACE OF STUD, FACE OF CONCRETE, CENTERLINE OF STRUCTURE, CENTER OF OPENING OR FIXTURE, UNLESS NOTED OTHERWISE.
- 8. ALL DOOR FRAMES SHALL BE LOCATED 4" FROM NEAREST PERPENDICULAR WALL OR CENTER ON WALL SEGMENT AS ILLUSTRATED, UNLESS DIMENSIONED OTHERWISE.
- WALL FRAMING SHALL BE AS NOTED BELOW UNLESS 9 NOTED OTHERWISE BY STRUCTURAL ENGINEER. CONSULT ARCHITECT ON ANY DISCREPANCIES.
 - A. ALL EXTERIOR & LOADING BEARING WALLS SHALL BE CONSTRUCTED WITH 2X6 OR 2X4 WOOD FRAMING AT 18" ON CENTER, U.N.O. REFER TO WALL LEGEND BELOW.
 - B. ALL SIMPLE (NON-LOAD BEARING) INTERIOR PARTITIONS SHALL BE CONSTRUCTED WITH 2X4 WOOD FRAMING AT 24" ON CENTER, U.N.O.
 - C. ALL INTERIOR AND EXTERIOR PLUMBING WALLS TO BE CONSTRUCTED WITH 2X6 FRAMING, U.N.O.
 - D. ALL INTERIOR PARTITIONS SUPPORTING POCKET DOORS TO BE CONSTRUCTED WITH 2X6 FRAMING, U.N.O.
- 10. ROOF AND FLOOR FRAMING SHALL BE PER STRUCTURAL DRAWINGS. TRUSS MANUFACTURER SHALL SUPPLY SHOP DRAWINGS SEALED BY AN ENGINEER TO DESIGN TEAM AND CONTRACTOR FOR APPROVAL PRIOR TO FABRICATION.
- 10. EXTERIOR WALL INSULATION ALL EXTERIOR WALLS SHALL RECEIVE MIN. R-19 CELLULOSE BLOWN-IN INSULATION WITH OPTIONAL SPRAY FOAM LAYER ADJACENT TO EXTERIOR WALL.
- 11. ROOF INSULATION ALL ROOF SHALL RECEIVE MIN. R-36 OPEN CELL SPRAY FOAM INSULATION.
- 12. FLOOR INSULATION ALL SPACES BETWEEN FLOORS SHALL RECEIVE MIN. R-30 BATT INSULATION BETWEEN FLOORS.
- 13. INTERIOR WALL INSULATION ALL BEDROOMS, BATHROOM AND LAUNDRY ROOM WALLS SHALL RECEIVE SOUND BATT INSULATION.
- 14. CONTRACTOR SHALL PROVIDE BLOCKING IN WALLS AND CEILINGS AS REQUIRED FOR ALL ACCESSORIES, WALL MOUNTED ITEMS, CEILING FANS, ETC.
- 15. USE ^½" WATER RESISTANT GYP BD IN BATHROOM AND KITCHEN ON ALL WALLS EXCEPT BEHIND CERAMIC TILE AND BATH TUB WHERE TILE BACKER BOARD (DENSHIELD) IS USED.
- 16. ALL DIMENSIONS ARE TAKEN FROM EDGE OF SLAB TO FACE OF WOOD, UNLESS NOTED "CLEAR".
- 17. ALL DOOR OPENINGS TO BE 4" FROM ADJACENT WALL, U.N.O.
- 18. CONTRACTOR TO INSTALL BLOCKING IN WALLS AND CEILINGS AS REQUIRED FOR ALL ACCESSORIES, WALL MOUNTED ITEMS, CEILING FANS, ETC.
- 19. TRUSS MANUFACTURER SHALL SUPPLY SHOP DRAWINGS SEALED BY AN ENGINEER TO ARCHITECT AND CONTRACTOR FOR APPROVAL PRIOR TO FABRICATION.
- 20. CONTACT ARCHITECT/OWNER WITH ANY FRAMING QUESTIONS/DISCREPANCIES.




EXISTING WALL/ELEMENT TO REMAIN

г----л

REMOVE EXISTING ELEMENT

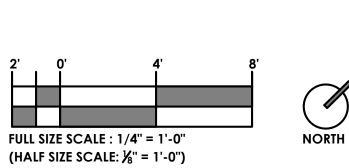


WEISS ARCHITECTURE 3355 BEE CAVE RD 3355 BEE CAVE RD 3 T U D I O # 3 0 3 A U ST IN TX 78746 (512) 447-6806 TEL WEISSARC.COM PRELIMINARY REVIEW SET NOT FOR PERMITTING REGULATORY APPROVAL OR CONSTRUCTION
14 FEB 2022
BH STREET ADDITION 1502 w. 9TH STREET AUSTIN, TEXAS 78703
project for which it was proposed. Ihis document is not intended or authorized for use by any party on any other project. Any reuse including copying and/or modifying this document, without written permission from Weiss Architecture, inc. for the specific purpose intended is a violation of Federal Copyright law.
DATE DESCRIPTION XX/XX/XX DRAWING SET
JOB NO. R2203 DRAWN BY LL
SHEET NAME LEVEL 1 DEMOLITION FLOOR PLAN SHEET NUMBER
D1.1

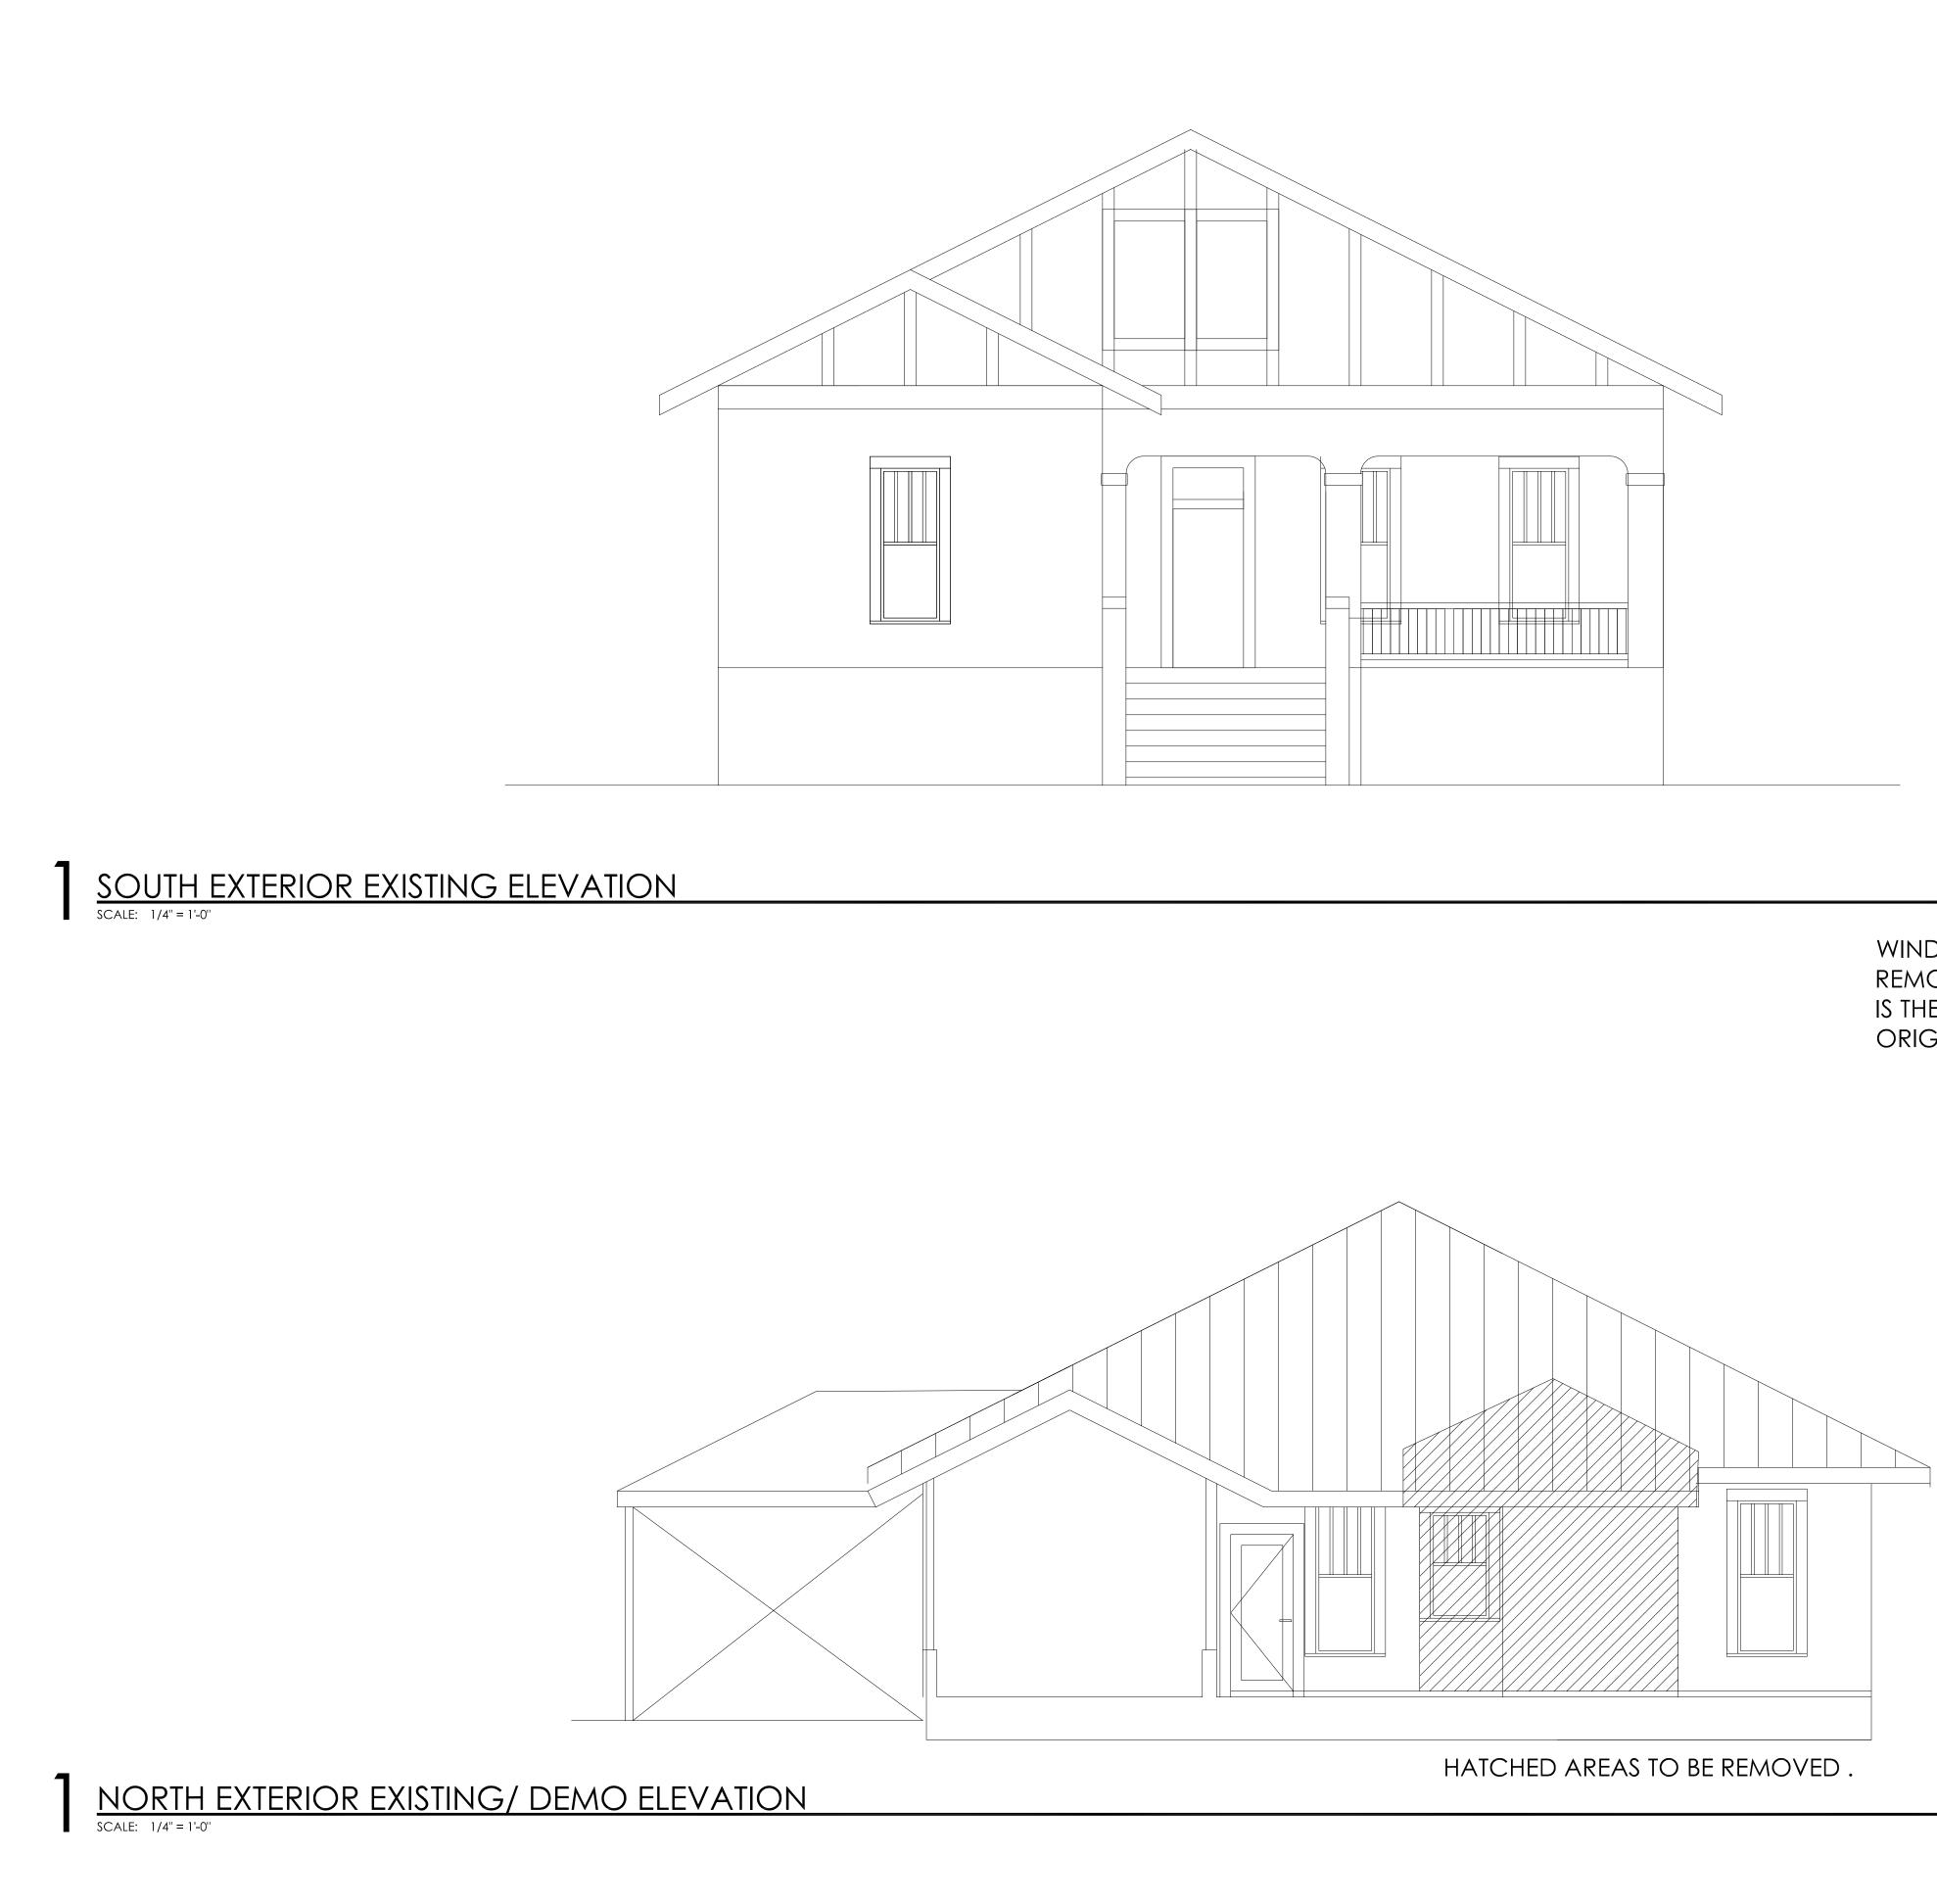

WINDOW REPLACEMENT AND REMOVAL OF REAR CLOSET/WINDOV IS THE ONLY SCOPE IMPACTING THE ORIGINAL HOUSE

		WEISS ARCHITECTURE 3355 BEE CAVE RD STUDIO # 303 AUSTIN TX 78746 (512) 447-6806 TEL WEISSARC.COM RECONSTRUCTION OR CONSTRUCTION OR CONSTRUCTION CON
W		9TH STREET ADDITION 1502 W. 9TH STREET, AUSTIN, TEXAS 78703
		This document, whether in hard copy or digital form, is copyrighted and an instrument of services in respect to the project for which it was proposed. This document is not intended or authorized for use by any party on any other project. Any reuse including copying and/or modifying this document, without written permission from Weiss Architecture, inc. for the specific
		Federal Copyright law.
		REV. # DATE DESCRIPTION - XX/XX/XX DRAWING SET
		JOB NO. R2203 DRAWN BY LL SHEET NAME EXISTING
	2'	ELEVATIONS SHEET NUMBER D2.1



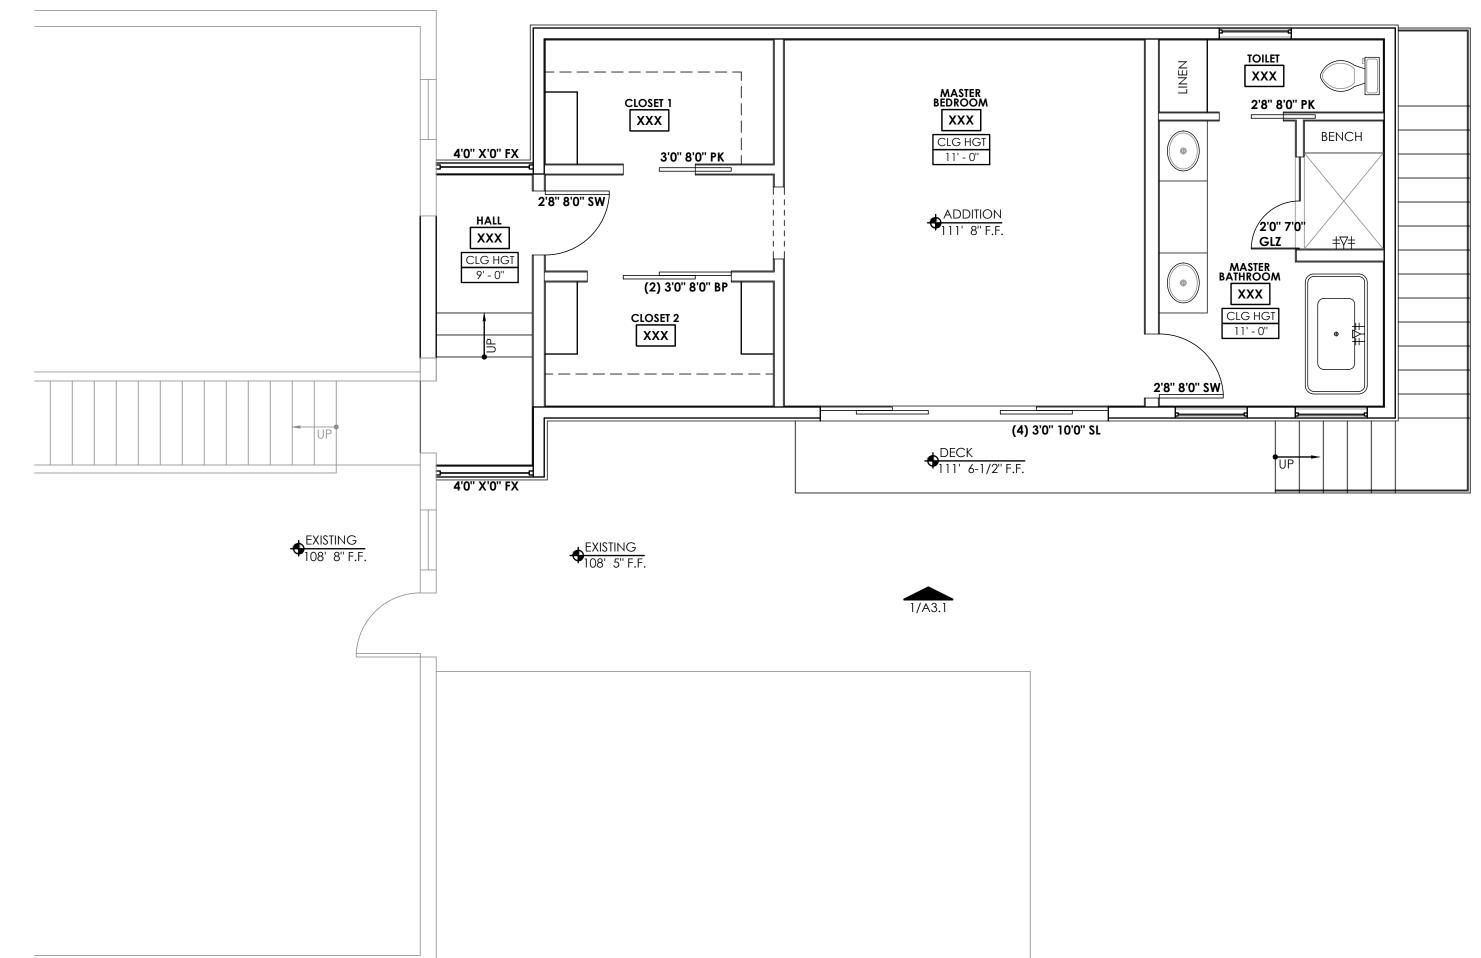

FLOOR PLAN : MASTER BEDROOM ADDITION

SHEET NOTES


- REFER TO SHEET G1.0 FOR CODE COMPLIANCE.
- 2. REFER TO SHEET G2.0 FOR GENERAL NOTES.
- 3. REFER TO SHEET AS1.0 FOR VISITABILITY REQUIREMENTS. 4. REFER TO A3.0 SERIES FOR EXTERIOR ELEVATIONS AND
- ADDITIONAL WINDOW TAGS.
- 5. DO NOT SCALE DRAWINGS.
- 6. VERIFY ALL DIMENSIONS IN FIELD AND REPORT ALL DISCREPANCIES TO THE ARCHITECT FOR RESOLUTION PRIOR TO COMMENCEMENT OF WORK.
- ALL DIMENSIONS TO FACE OF STUD, FACE OF CONCRETE, CENTERLINE OF STRUCTURE, CENTER OF OPENING OR FIXTURE, UNLESS NOTED OTHERWISE.
- 8. ALL DOOR FRAMES SHALL BE LOCATED 4" FROM NEAREST PERPENDICULAR WALL OR CENTER ON WALL SEGMENT AS ILLUSTRATED, UNLESS DIMENSIONED OTHERWISE.
- WALL FRAMING SHALL BE AS NOTED BELOW UNLESS NOTED OTHERWISE BY STRUCTURAL ENGINEER. CONSULT ARCHITECT ON ANY DISCREPANCIES.
 - A. ALL EXTERIOR & LOADING BEARING WALLS SHALL BE CONSTRUCTED WITH 2X6 OR 2X4 WOOD FRAMING AT 18" ON CENTER, U.N.O. REFER TO WALL LEGEND BELOW.
 - B. ALL SIMPLE (NON-LOAD BEARING) INTERIOR PARTITIONS SHALL BE CONSTRUCTED WITH 2X4 WOOD FRAMING AT 24" ON CENTER, U.N.O.
 - C. ALL INTERIOR AND EXTERIOR PLUMBING WALLS TO BE CONSTRUCTED WITH 2X6 FRAMING, U.N.O.
 - D. ALL INTERIOR PARTITIONS SUPPORTING POCKET DOORS TO BE CONSTRUCTED WITH 2X6 FRAMING, U.N.O.
- 10. ROOF AND FLOOR FRAMING SHALL BE PER STRUCTURAL DRAWINGS. TRUSS MANUFACTURER SHALL SUPPLY SHOP DRAWINGS SEALED BY AN ENGINEER TO DESIGN TEAM AND CONTRACTOR FOR APPROVAL PRIOR TO FABRICATION.
- 10. EXTERIOR WALL INSULATION ALL EXTERIOR WALLS SHALL RECEIVE MIN. R-19 CELLULOSE BLOWN-IN INSULATION WITH OPTIONAL SPRAY FOAM LAYER ADJACENT TO EXTERIOR WALL.
- 11. ROOF INSULATION ALL ROOF SHALL RECEIVE MIN. R-36 OPEN CELL SPRAY FOAM INSULATION.
- 12. FLOOR INSULATION ALL SPACES BETWEEN FLOORS SHALL RECEIVE MIN. R-30 BATT INSULATION BETWEEN FLOORS.
- 13. INTERIOR WALL INSULATION ALL BEDROOMS, BATHROOM AND LAUNDRY ROOM WALLS SHALL RECEIVE SOUND BATT INSULATION.
- 14. CONTRACTOR SHALL PROVIDE BLOCKING IN WALLS AND CEILINGS AS REQUIRED FOR ALL ACCESSORIES, WALL MOUNTED ITEMS, CEILING FANS, ETC.
- 15. USE ½" WATER RESISTANT GYP BD IN BATHROOM AND KITCHEN ON ALL WALLS EXCEPT BEHIND CERAMIC TILE AND BATH TUB WHERE TILE BACKER BOARD (DENSHIELD) IS USED
- 16. ALL DIMENSIONS ARE TAKEN FROM EDGE OF SLAB TO FACE OF WOOD, UNLESS NOTED "CLEAR".
- 17. ALL DOOR OPENINGS TO BE 4" FROM ADJACENT WALL, U.N.O.
- 18. CONTRACTOR TO INSTALL BLOCKING IN WALLS AND CEILINGS AS REQUIRED FOR ALL ACCESSORIES, WALL MOUNTED ITEMS, CEILING FANS, ETC.
- 19. TRUSS MANUFACTURER SHALL SUPPLY SHOP DRAWINGS SEALED BY AN ENGINEER TO ARCHITECT AND CONTRACTOR FOR APPROVAL PRIOR TO FABRICATION.
- 20. CONTACT ARCHITECT/OWNER WITH ANY FRAMING QUESTIONS/DISCREPANCIES.




LEGEND AND SCALE

FULL SIZE SCALE : 1/4" = 1'-0"

(HALF SIZE SCALE: $\frac{1}{8}$ " = 1'-0")

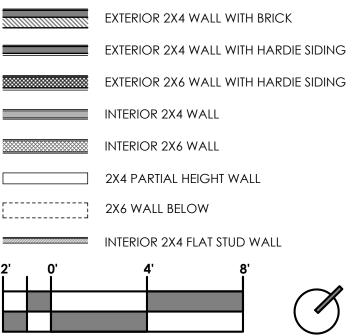

NORTH

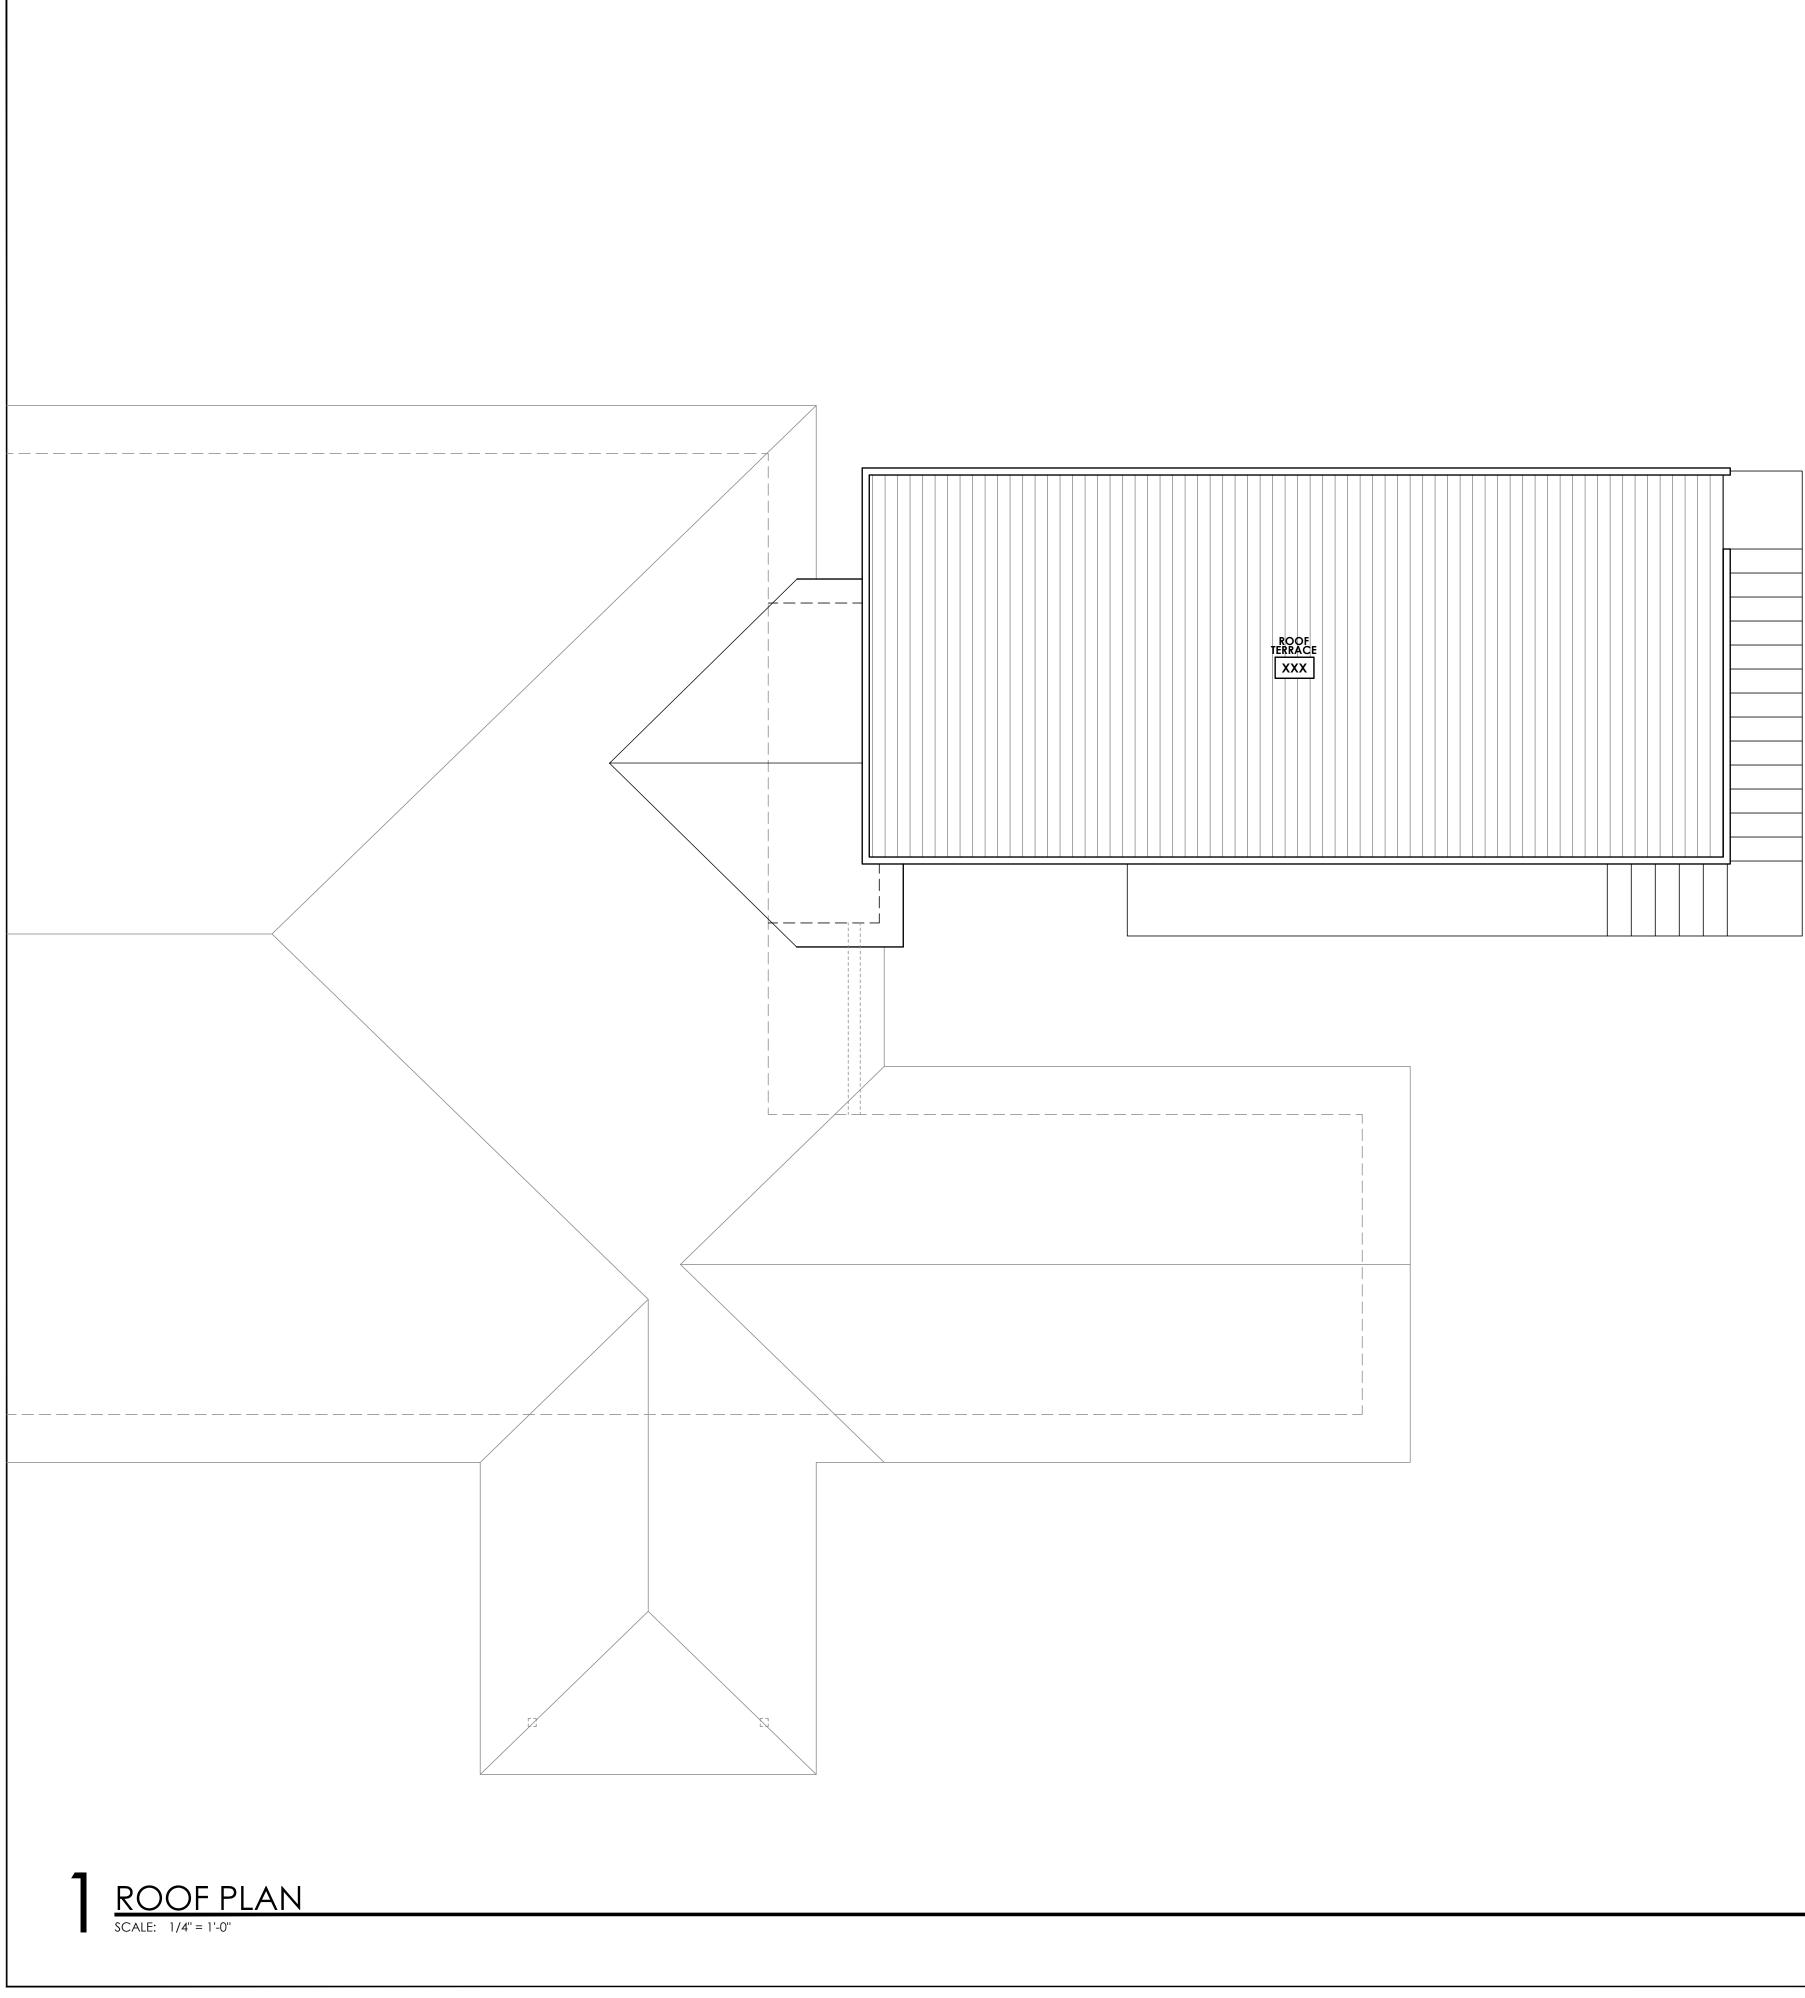

]
1
1
1
1
1
1
1
1
<u> </u>
1
1
1
1
1
1
1
1
1
 1

SHEET NOTES


- 1. PROVIDE GUTTERS AND DOWNSPOUTS.
- 2. BASIS OF DESIGN IS STANDING SEAM METAL ROOF. TPO OVER GARAGE.
- 3. VENT FOR ALL MECH/PLUMBING FIXTURES.
- 4. FIELD VERIFY ALL DIMENSIONS PRIOR TO CONSTRUCTION.
- 5. PROVIDE R-30 INSULATION BETWEEN ROOF AND CEILING.
- 6. PROVIDE RADIANT BARRIER ROOF DECKING.
- 7. FLASHING, UNDERLAYMENT, AND FASTENING DETAILS PER ROOF MANUF. INSTALLER. VERIFY WITH ARCHITECT.
- 8. COMPLETELY SEAL ROOF. PROVIDE FRESH AIR INTAKES AS PART OF HVAC SYSTEM.
- 9. SPRAY-FOAM INSULATION AT TRUSS AND SECOND FLOOR CEILING. SHEET ROCK BARRIER AROUND ALL MECHANICAL UNITS.
- 10. PROVIDE DECKING FOR MECHANICAL EQUIPMENT AND storage.

WEISS ARCHITECTURE 3355 BEE CAVE RD 3355 BEE CAVE RD 3 T U D I O # 3 O 3 A U S T I N T X 7 8746 (512) 447-6806 TEL WEISS A R C . C O M PRELIMINARY REVIEW SET NOT FOR PERMITTING REGULATORY APPROVAL OR CONSTRUCTION
9TH STREET ADDITION 1502 W. 9TH STREET, AUSTIN, TEXAS 78703
9TH STR 1502 W. 9TH 5
This document, whether in hard copy or digital form, is copyrighted and an instrument of services in respect to the project for which it was proposed. This document is not intended or authorized for use by any party on any other project. Any reuse including copying and/or modifying this document, without written permission from Weiss Architecture, inc. for the specific purpose intended is a violation of Federal Copyright law.
DATE DESCRIPTION XX/XX/XX DRAWING SET
JOB NO. R2203 DRAWN BY LL SHEET NAME ROOF PLAN
SHEET NUMBER A1.3

SCALE

2')' 4	4' 8 	3'
	E SCALE : 1/4" = ZE SCALE: ½" = 1		

NORTH

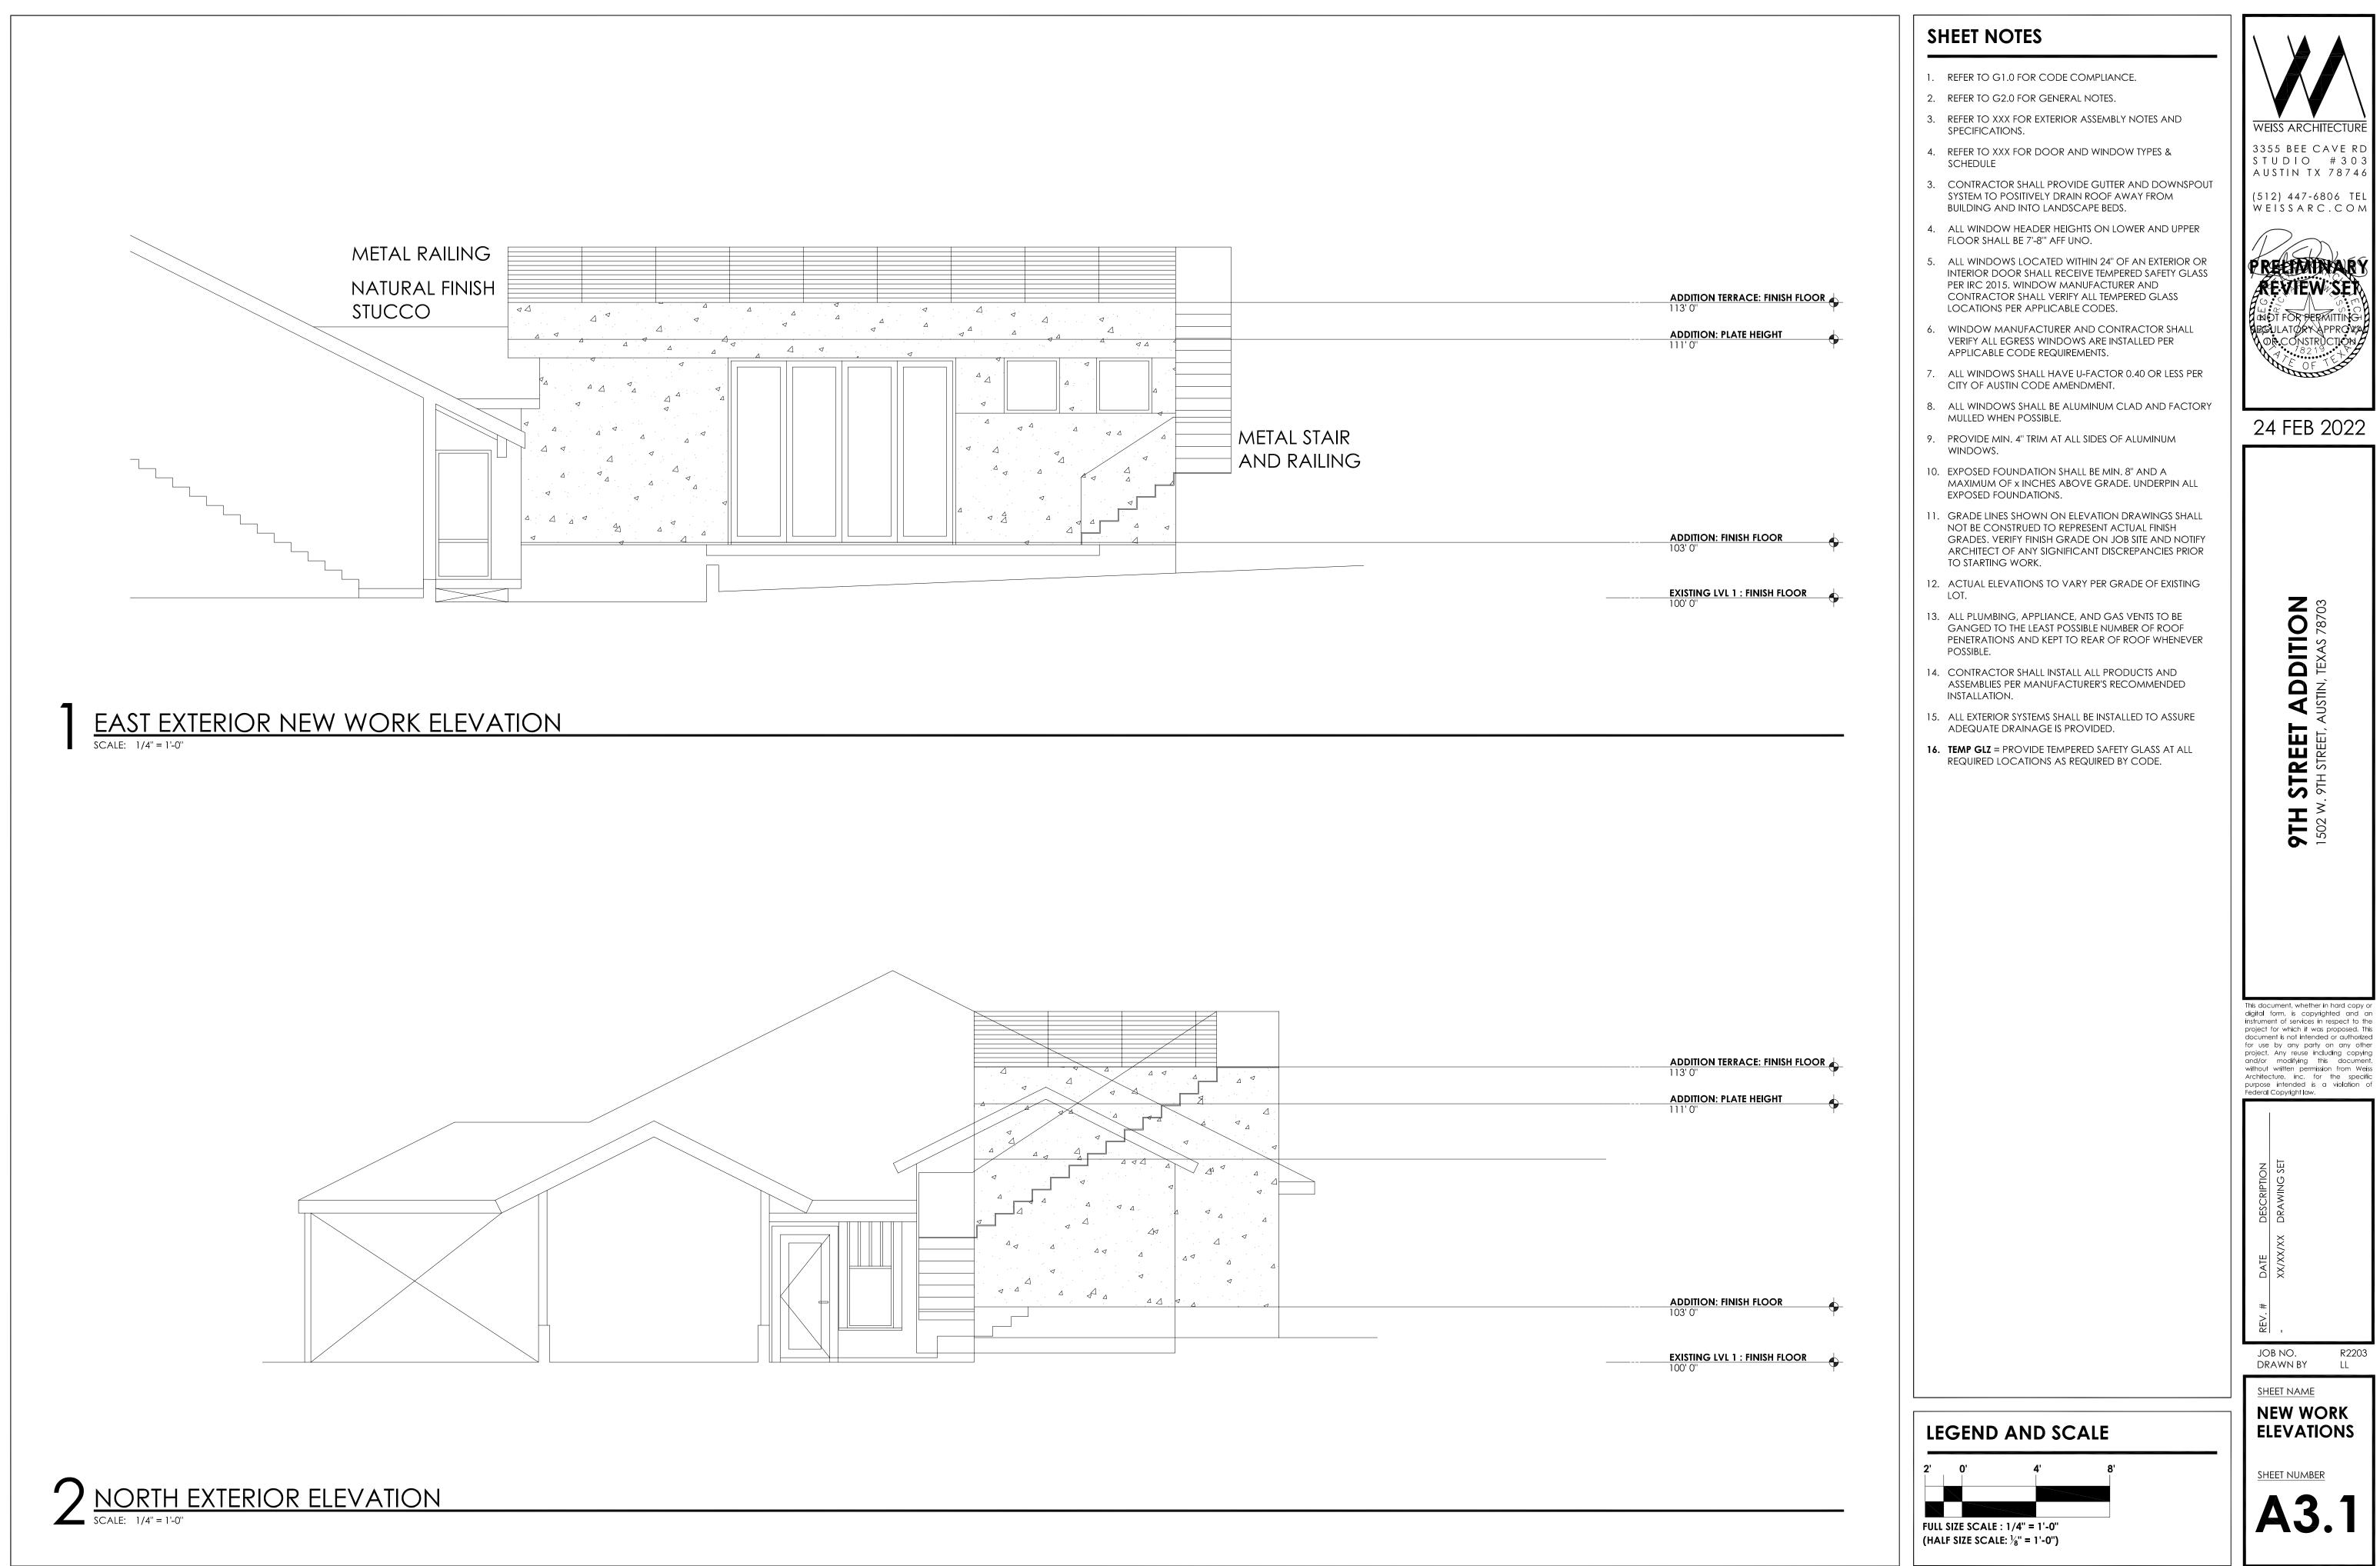


						1		
			-					
			- - -					
ADDITION TER 113'0"	ADDIII 113' 0"						4	<i>ح</i>
Δ Δ Δ Δ Δ Δ Δ Δ Δ Δ Δ Δ Δ Δ Δ Δ Δ Δ Δ					<u>↓</u> Δ	⊲ ⊿		<
							∢	
		_		۰. ک				
METAL STAIR AND RAILING				4				
	ADDIT							
103'0"	103' 0"							
EXISTING LVL	EXISTII							



SHEET NOTES

- 1. REFER TO G1.0 FOR CODE COMPLIANCE.
- 2. REFER TO G2.0 FOR GENERAL NOTES.
- 3. REFER TO XXX FOR EXTERIOR ASSEMBLY NOTES AND specifications.
- 4. REFER TO XXX FOR DOOR AND WINDOW TYPES & SCHEDULE
- CONTRACTOR SHALL PROVIDE GUTTER AND DOWNSPOUT 3 SYSTEM TO POSITIVELY DRAIN ROOF AWAY FROM BUILDING AND INTO LANDSCAPE BEDS.
- 4. ALL WINDOW HEADER HEIGHTS ON LOWER AND UPPER FLOOR SHALL BE 7'-8''' AFF UNO.
- 5. ALL WINDOWS LOCATED WITHIN 24" OF AN EXTERIOR OR INTERIOR DOOR SHALL RECEIVE TEMPERED SAFETY GLASS PER IRC 2015. WINDOW MANUFACTURER AND CONTRACTOR SHALL VERIFY ALL TEMPERED GLASS LOCATIONS PER APPLICABLE CODES.
- 6. WINDOW MANUFACTURER AND CONTRACTOR SHALL VERIFY ALL EGRESS WINDOWS ARE INSTALLED PER APPLICABLE CODE REQUIREMENTS.
- 7. ALL WINDOWS SHALL HAVE U-FACTOR 0.40 OR LESS PER CITY OF AUSTIN CODE AMENDMENT.
- 8. ALL WINDOWS SHALL BE ALUMINUM CLAD AND FACTORY MULLED WHEN POSSIBLE.
- 9. PROVIDE MIN. 4" TRIM AT ALL SIDES OF ALUMINUM WINDOWS.
- 10. EXPOSED FOUNDATION SHALL BE MIN. 8" AND A MAXIMUM OF X INCHES ABOVE GRADE. UNDERPIN ALL EXPOSED FOUNDATIONS.
- 11. GRADE LINES SHOWN ON ELEVATION DRAWINGS SHALL NOT BE CONSTRUED TO REPRESENT ACTUAL FINISH GRADES. VERIFY FINISH GRADE ON JOB SITE AND NOTIFY ARCHITECT OF ANY SIGNIFICANT DISCREPANCIES PRIOR to starting work.
- 12. ACTUAL ELEVATIONS TO VARY PER GRADE OF EXISTING LOT.
- 13. ALL PLUMBING, APPLIANCE, AND GAS VENTS TO BE GANGED TO THE LEAST POSSIBLE NUMBER OF ROOF PENETRATIONS AND KEPT TO REAR OF ROOF WHENEVER possible.
- 14. CONTRACTOR SHALL INSTALL ALL PRODUCTS AND ASSEMBLIES PER MANUFACTURER'S RECOMMENDED INSTALLATION.
- 15. ALL EXTERIOR SYSTEMS SHALL BE INSTALLED TO ASSURE ADEQUATE DRAINAGE IS PROVIDED.
- **16. TEMP GLZ** = PROVIDE TEMPERED SAFETY GLASS AT ALL REQUIRED LOCATIONS AS REQUIRED BY CODE.



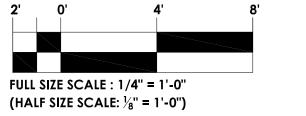



A3.2
