



# **ATTACHMENT 2**


## **Plan Sheets**

DATE: 10/13/2026 7:31 AM  
FILE: C:\USERS\SPD684338\CORP\DOACCD\CSWSP USA PROJECTS (AMER)\AUS300-CAP EX C - AW UTILITY RELOCATE\PROJECT FILES\01\_WIP\SP6\CAPEX\_452\_P6\_MC-ESMT.DWG  
USER ID: DESHMUKH PRANO TI

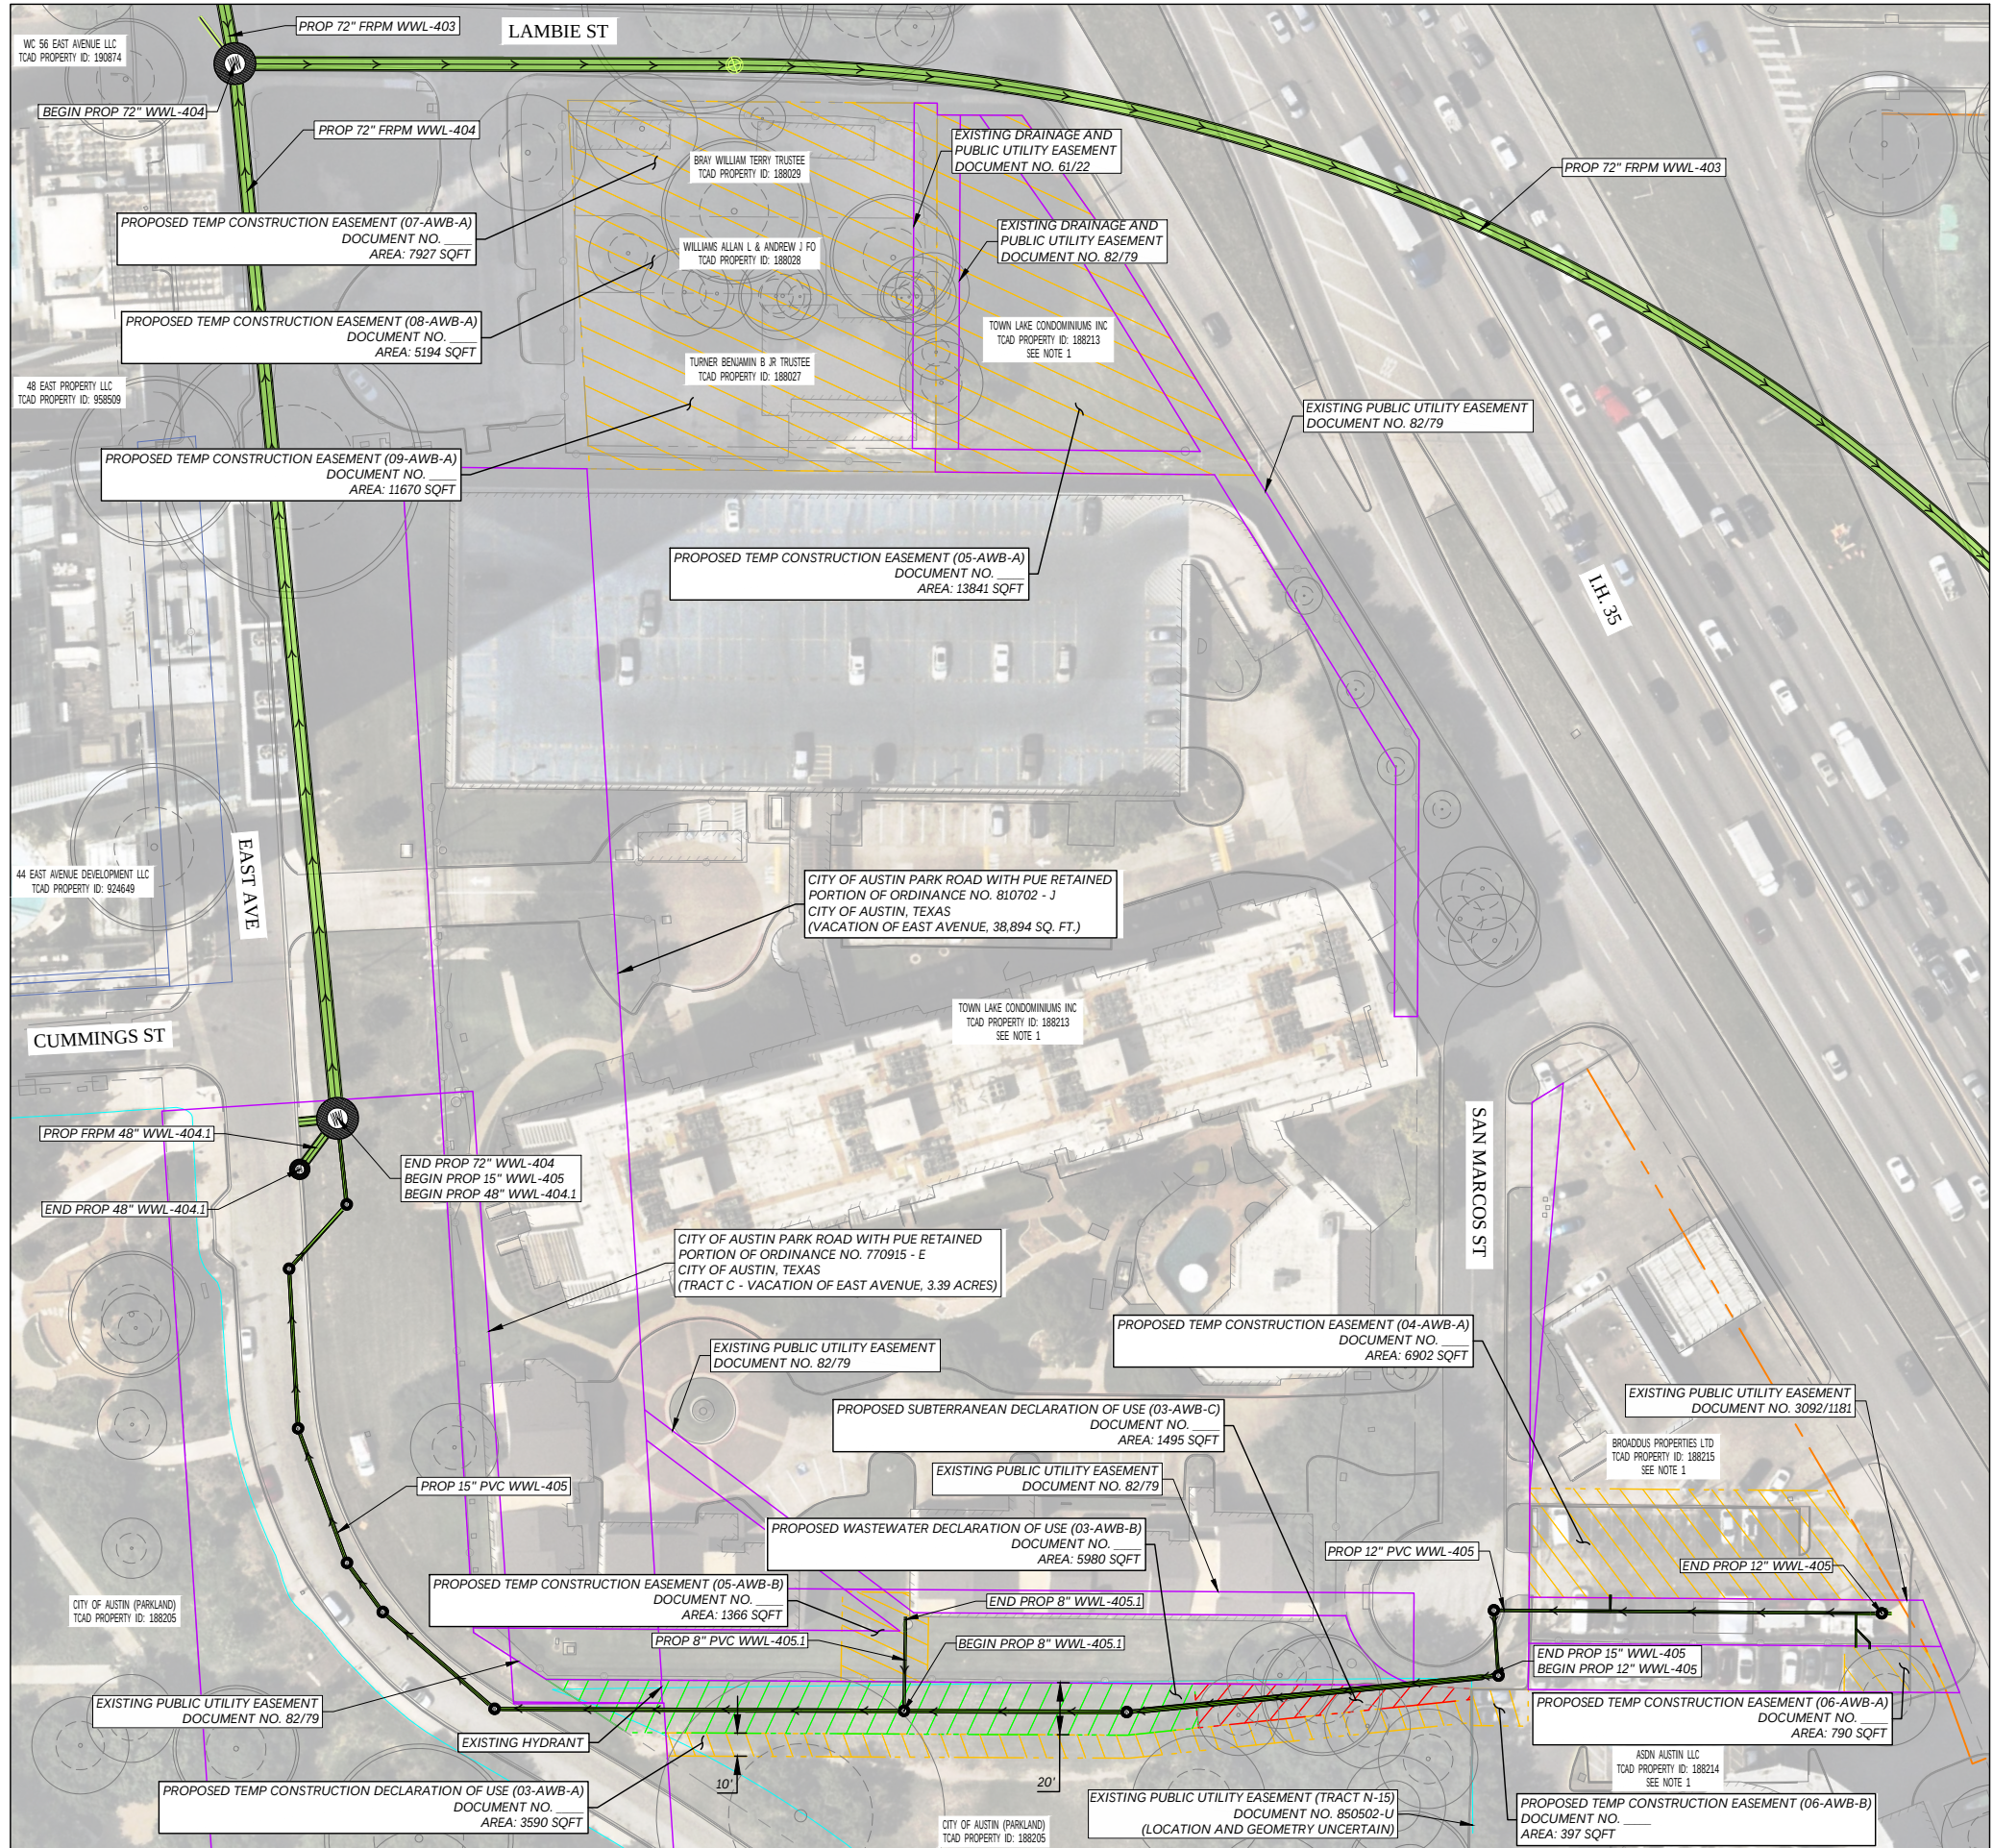

LEGEND

- PROPOSED WASTEWATER EASEMENT (COA)
- PROPOSED TEMP CONSTRUCTION EASEMENT (COA)
- PROPOSED WATER/WASTEWATER EASEMENT (COA)
- PROPOSED WASTEWATER SUBTERRANEAN EASEMENT (COA)
- EXISTING WASTEWATER EASEMENT (COA)
- PARKS DEPARTMENT PROPERTY
- EXISTING ROW
- PROPOSED ROW
- EXISTING EASEMENT

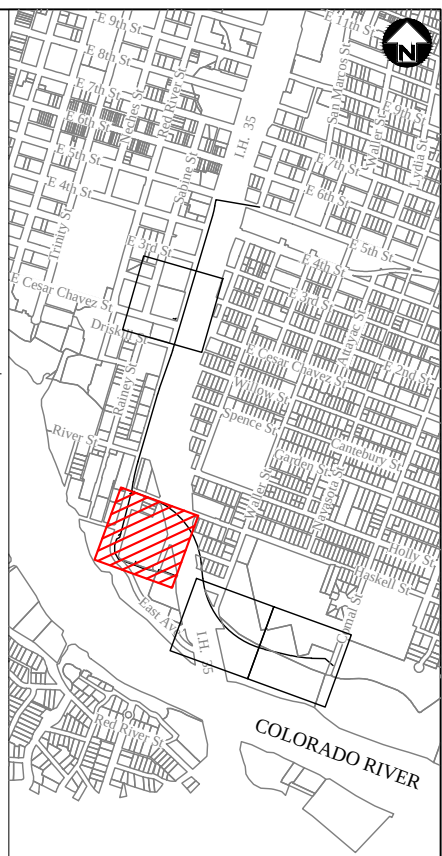

LOCATION MAP  
NOT-TO-SCALE

KEY NOTES:

- SANITARY SEWER SERVICES WILL NEED TO BE RECONNECTED TO THESE PROPERTIES AS PART OF THIS PROJECT.
- TEMPORARY CONSTRUCTION EASEMENT REQUIRED FOR TRENCHLESS OPERATIONS AND LAYDOWN AREA.
- THE WIDTH OF THE PROPOSED WWL EASEMENT IS AT LEAST TWICE THE DEPTH OF THE WWL, EXCEPT WHERE THE WWL WILL NOT BE MAINTAINED FROM THE SURFACE. A PORTION OF THE PROPOSED WWL WILL BE INSTALLED BY TRENCHLESS MEANS, MAKING ITS DEPTH NON-CRITICAL TO THE WIDTH OF THE EASEMENT.
- ALL WORK ON PARKLAND SHALL COMPLY WITH ECM 5: CONSTRUCTION IN PARKS (ECM 5.4.1).

| REV | DATE | BY | DESCRIPTION |
|-----|------|----|-------------|
|-----|------|----|-------------|



CAPITAL EXPRESS CENTRAL

SP6 EASEMENT PLAN


|        |        |              |                |                |
|--------|--------|--------------|----------------|----------------|
| EM203  |        | SHEET 3 OF 4 |                |                |
| DS: JK | CK: DA | CONT: 0015   | SECT: 13       | JOB: 452       |
| DW: VT | CK: DA | DIST: AUS    | COUNTY: TRAVIS | HIGHWAY: IH 35 |
|        |        |              |                | SHEET NO.: 248 |





USER ID: DAVILA, CESAR

DATE: 3/26/2026 12:42 PM  
FILE: C:\USERS\USCD139799\DWG\CD\CCDC\DWG\WSP USA PROJECTS (AMER)\AUS300-CAP EX C-AW UTILITY RELOCATE\PROJECT FILES\01\_WIP\SP6SHEETS\IP6\_TREE\_07.DWG

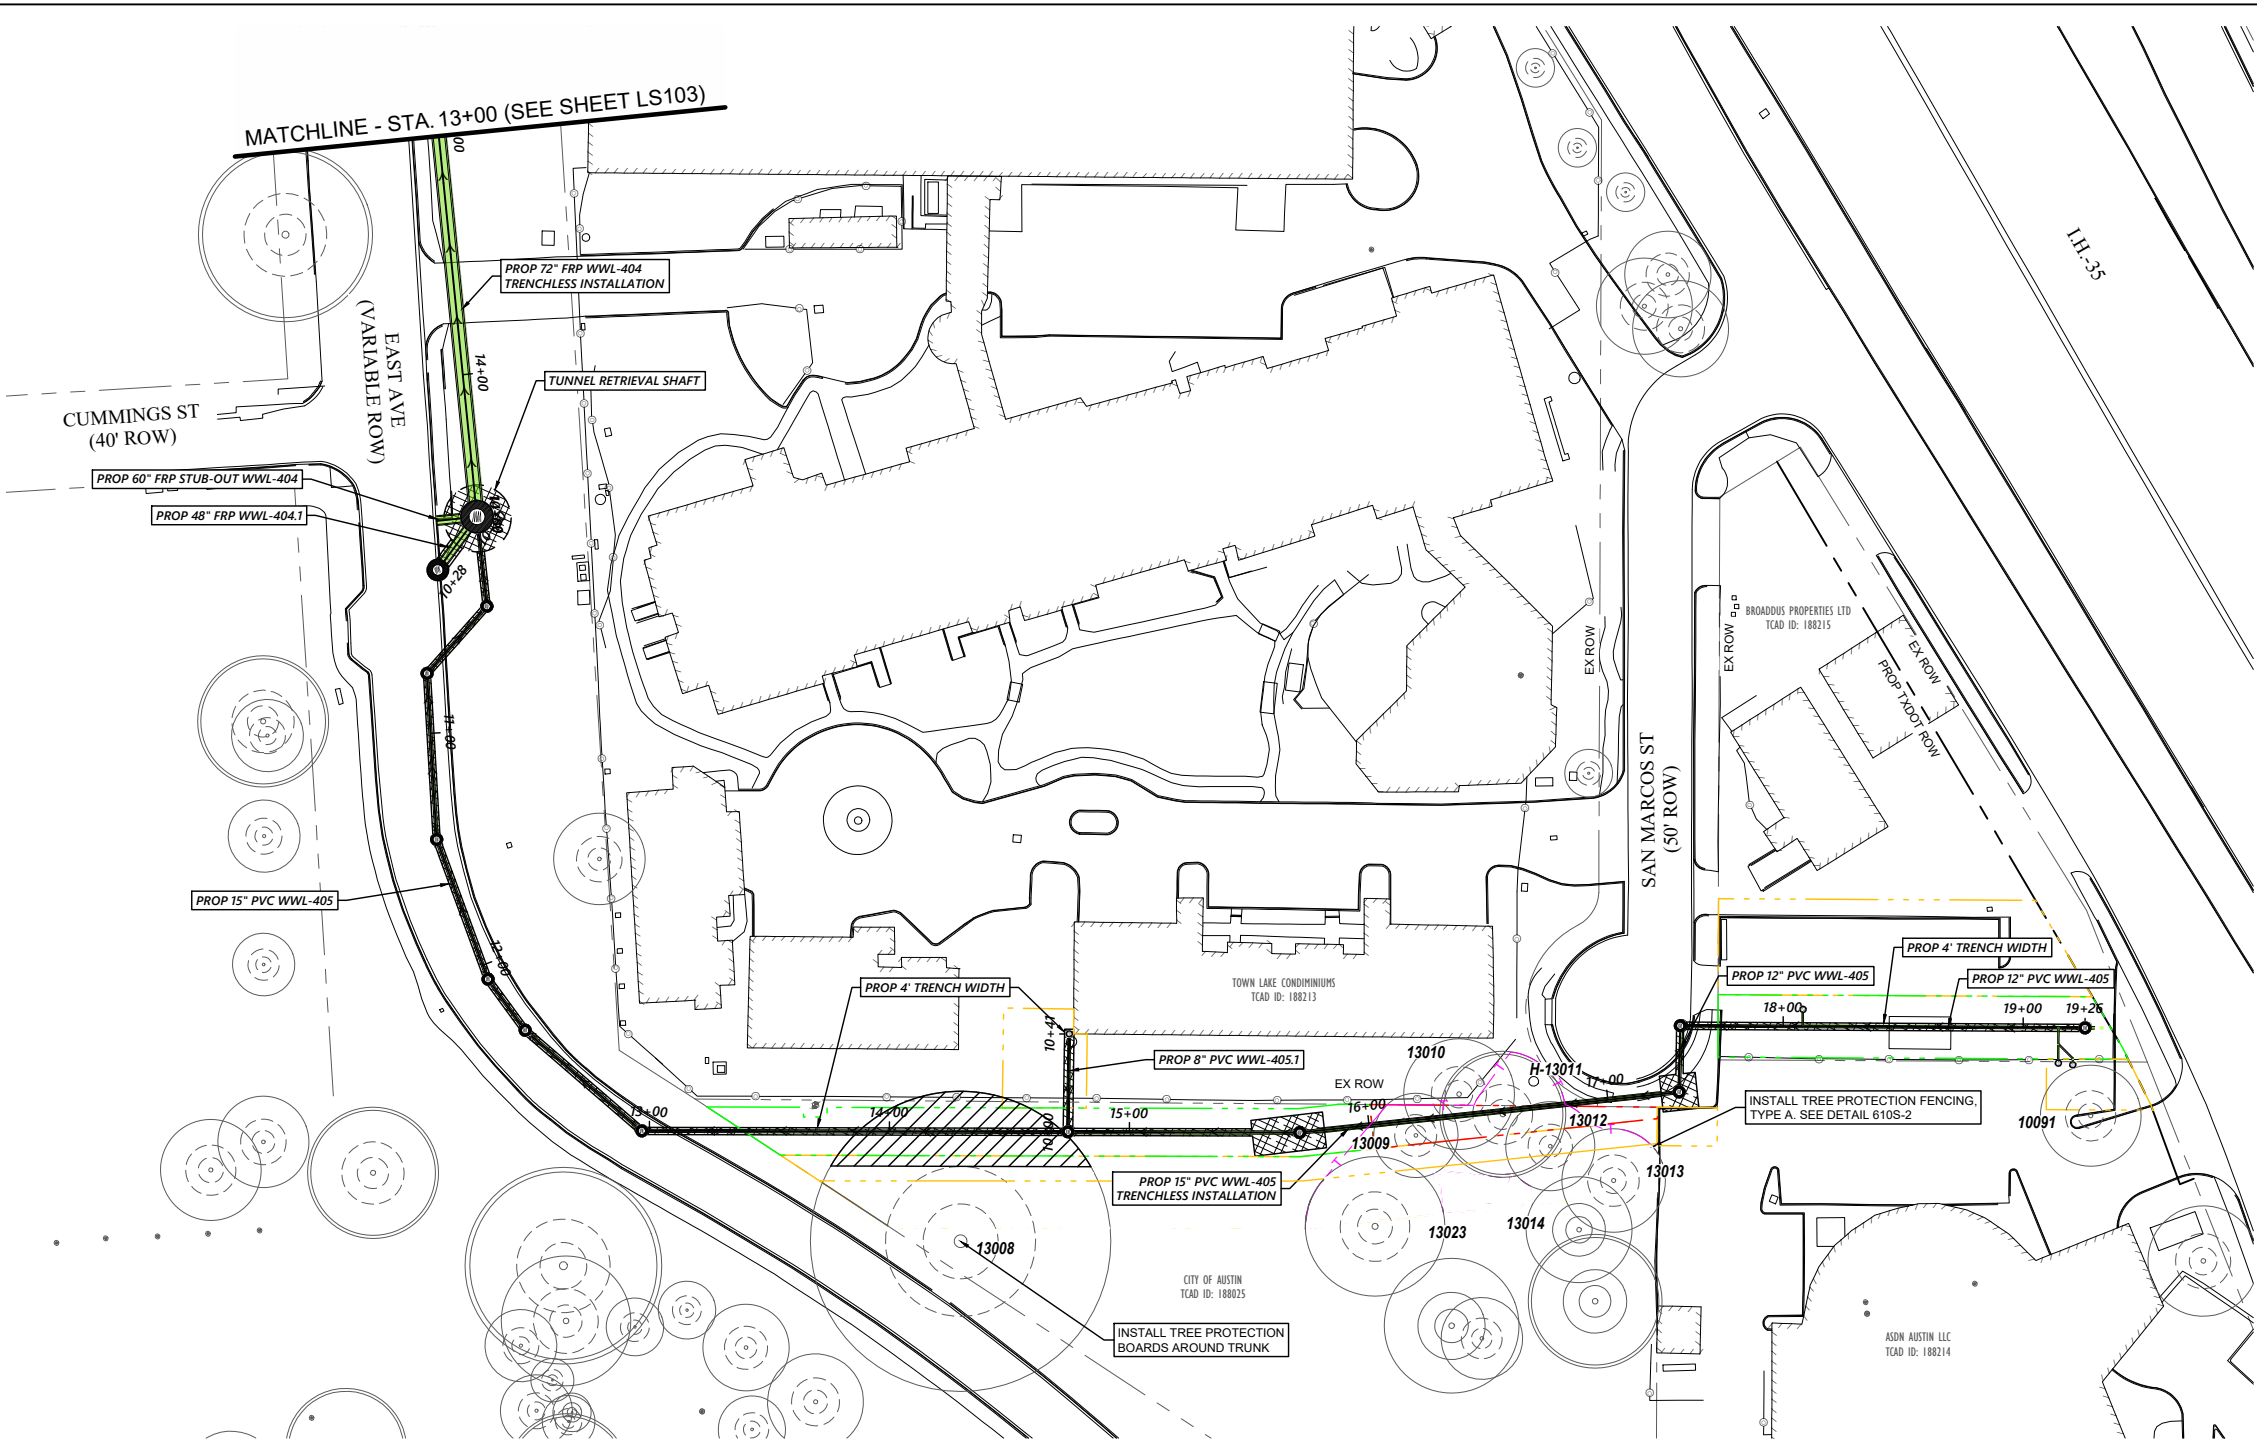

**LEGEND**

- PROPOSED ROW
- EXISTING ROW
- TRENCH WIDTH
- TREE PROTECTION FENCE, TYPE A
- TREE REFERENCE NUMBER
- EXISTING TREE TO REMAIN
- HERITAGE TREE TO REMAIN
- EXISTING TREE TO REMAIN WITH MITIGATION
- HERITAGE TREE TO REMAIN WITH MITIGATION
- EXISTING TREE TO BE REMOVED
- HERITAGE TREE TO BE REMOVED
- TREE PRUNING EXTENTS

- NOTES**
- NO ACTIVITY SHALL OCCUR BEHIND OR WITHIN TREE PROTECTION FENCING DURING DURATION OF CONSTRUCTION PERIOD.
  - WHERE FULL CRITICAL ROOT ZONE FENCING IS NOT POSSIBLE, UNFENCED CRITICAL ROOT ZONE PORTIONS WITHIN GRASS AREAS WITHIN CITY ROW OR EASEMENTS, SHALL BE COVERED IN MULCH 8-12 INCHES DEEP TO REDUCE COMPACTION.
  - IF FENCING IS LOCATED WITHIN 5 FEET OF A TREE TRUNK, THE TRUNK MUST BE WRAPPED WITH TREE PROTECTION BOARDS AND SECURED USING METHODS THAT DO NOT HARM THE BARK.
  - TREES ARE IDENTIFIED BY THESE PLANS FOR PROTECTIVE TREE FENCING REFERENCE ONLY. EXACT LINEAR FOOTAGE ARE BASED ON THE PROVIDED DETAILS AND CONTRACTOR'S MEANS AND METHODS.
  - TREE PROTECTION SHOWN WITHIN PAVED STREETS CAN BE CHAIN LINK CONSTRUCTION FENCING.

| TREE REF. NO. | GENERAL LOCATION            | PUBLIC OR PRIVATE | TREE IMPACT      | ACTION  | TRUNK DIA (IN) | SPECIES     | COA REGULATED STATUS |
|---------------|-----------------------------|-------------------|------------------|---------|----------------|-------------|----------------------|
| 10091         | WWL-405, STA. 19+26 (37' R) | PRIVATE           | WORK OUTSIDE CRZ | PROTECT | 21             | LIVE OAK    | PROTECTED            |
| 13008         | WWL-405, STA. 14+30 (46' R) | PUBLIC            | WORK IN CRZ      | PROTECT | 62.5           | COTTON WOOD | PROTECTED            |
| 13009         | WWL-405, STA. 16+19 (6' R)  | PUBLIC            | WORK OUTSIDE CRZ | PROTECT | 17.5           | LIVE OAK    | REGULATED            |
| 13010         | WWL-405, STA. 16+39 (9' L)  | PRIVATE           | WORK OUTSIDE CRZ | PROTECT | 23             | LIVE OAK    | PROTECTED            |
| 13011         | WWL-405, STA. 16+56 (1' R)  | PUBLIC            | WORK OUTSIDE CRZ | PROTECT | 25             | LIVE OAK    | HERITAGE             |
| 13012         | WWL-405, STA. 16+74 (17' R) | PUBLIC            | WORK OUTSIDE CRZ | PROTECT | 18.5           | HACKBERRY   | REGULATED            |
| 13013         | WWL-405, STA. 16+99 (34' R) | PUBLIC            | WORK OUTSIDE CRZ | PROTECT | 21.5           | LIVE OAK    | PROTECTED            |
| 13014         | WWL-405, STA. 16+82 (53' R) | PUBLIC            | WORK OUTSIDE CRZ | PROTECT | 22             | LIVE OAK    | PROTECTED            |
| 13023         | WWL-405, STA. 15+98 (42' R) | PUBLIC            | WORK OUTSIDE CRZ | PROTECT | 29             | HACKBERRY   | PROTECTED            |



| REV | DATE | BY | DESCRIPTION |
|-----|------|----|-------------|
|     |      |    |             |

WSP USA Inc.  
1601 Sankofa Expy, Suite 325  
Austin, TX 78746  
TEL: 737.703.3600  
TBP#F-2263

**CAPITAL EXPRESS CENTRAL  
TREE PROTECTION**

**6 (WWL-404) (WWL-405)  
(STA. 13+00 - END) (START - END)**

**LS107** SHEET **7** OF **7**

|     |     |      |        |           |       |
|-----|-----|------|--------|-----------|-------|
| DS: | CK: | 0015 | 13     | 452       | IH 35 |
| VT  | JK  | DIST | COUNTY | SHEET NO. |       |
| DW: | CK: | AUS  | TRAVIS | 7         |       |
| VT  | JK  |      |        |           |       |