ORDINANCE NO. 20221115-041

AN ORDINANCE AMENDING CITY CODE SECTION 12-4-64(D) (TABLE OF SPEED LIMITS) TO MODIFY THE SPEED LIMIT ON HARRIS BRANCH PARKWAY.

BE IT ORDAINED BY THE CITY COUNCIL OF THE CITY OF AUSTIN:

- **PART 1.** City Code Section 12-4-64(D) (*Table of Speed Limits*) is amended to delete: Harris Branch Parkway from Parmer Lane (East) to Gregg Lane. (40 MPH)
- **PART 2.** City Code Section 12-4-64(D) (*Table of Speed Limits*) is amended to add: Harris Branch Parkway from Parmer Lane (East) to Gregg Lane. (45 MPH)
- **PART 3.** The amendments made in this ordinance are based on the results of a traffic engineering investigation, or speed study, referenced in the Memorandum attached as Exhibit "A".
- **PART 4.** The amendments made in this ordinance shall be incorporated in alphabetical order and the existing entries reordered accordingly.

PART 5. This ordinance takes effect on November 28, 2022.

PASSED AND APPROVED

November 15, 2022

Steve Adler Mayor

APPROVED: Anne L. Morgan Myrna Rios

City Attorney

City Clerk



M E M O R A N D U M

TO:

Robert Spillar, P.E., Director,

Austin Transportation Department

FROM:

Eric Bollich, P.E., PTOE, Managing Engineer,

Austin Transportation Department

CC:

Anna Martin, P.E., Assistant Director, Austin Transportation Department

Lewis Leff, Transportation Safety Officer, Austin Transportation Department


DATE:

May 11, 2022

SUBJECT:

Speed Modification Report - City of Austin Level 3 and 4 Streets Outside of the

Urban Core



This study summarizes the background, methodology, and recommendations to set speed limits based on the context and operating characteristics of streets meeting the criteria set herein.

Summary of Recommendations

Based on this engineering evaluation, the Office of the City Traffic Engineer has determined the following speed limit modifications should be entered into the City's Code of Ordinances based on ATD's evaluation of safe and prudent speeds. ATD, under the authority of the Office of the City Traffic Engineer, intends to bring an item for Council action to set new speed limits on the identified streets based on the following recommendations:

• Recommendation 1: Modify speed limits on 48 Level 3 and 4 street segments, resulting in lowered speed limits between 5 miles per hour (mph) and 15 mph. Street segments impacted by Recommendation 1 are detailed in Table 1.

Additionally, some Level 3 and 4 streets do not have speed limits included in the City's Code of Ordinances but have posted speed limits. These streets should be added to the Code of Ordinances for enforceability as they are not covered by prima facie speed limits of 30 mph.

5/11/22

Speed Modification Report – City of Austin Level 3 and 4 Streets Outside of the Urban Core $\[Page = 1\]$ and 2 Streets Outside of the Urban Core May 11, 2022

Recommendation 2: Formally set speed limits in the City's Code of Ordinances on four Level 3
and 4 street segments. Street segments impacted by Recommendation 2 are detailed in Table
2.

Per Texas Transportation Code, Section 545.356, speed limit modifications set by municipalities are effective when signs are posted messaging new speed limits.

• Recommendation 3: ATD will develop a plan to install signage needed for streets impacted by speed limit modifications recommended in this engineering study. The signage installation plan will include the design and placement of signage; prioritization of implementation based on documented safety concerns and geographic dispersion; and time and material cost estimations to complete sign installation. Given the quantity of signage requiring change, ATD will request Council authorize the speed changes, pending appropriate signage placement under the administrative authority of the Office of the City Traffic Engineer.

ATD's review of best practices revealed that comprehensive speed limit modifications are most effective when coupled with public awareness efforts. The intent of the effort is to reach a broad audience with a focused, consistent message to bring attention to the purpose and desired outcomes of speed limit modifications.

Recommendation 4: ATD will conduct a citywide public awareness effort to increase awareness of the pending speed limit modifications. ATD will ensure that educational awareness materials are culturally relevant and that they explain the need for the change and their intended safety goal. ATD will partner with law enforcement agencies as possible to achieve the intended speed outcome through targeted education and enforcement activities, particularly on streets with documented speeding concerns.

Background

Level 3 and 4 streets are broadly defined as arterial (major) streets designed to carry high volumes of traffic, normally at higher speeds than streets in residential settings. They provide access to a variety of land uses and generally accommodate longer intracity trips. Austin has experienced decades of double-digit population growth and metropolitan area expansion, changing the operating characteristics of the City's roadway network during this time. Most of the speed limits on Level 3 and 4 streets that were established before this rapid growth and have not been evaluated for appropriateness under current developed conditions.

ATD completed a separate engineering report in 2020 with recommendations to lower speed limits on 15 Level 3 and 4 streets within the Urban Core. City Council approved these recommendations in June 2020, leading to lowered speed limits entered into the City's Code of Ordinances and posted on the corresponding streets by the end of that year. This study follows up that report addressing the previously unstudied arterials outside of the Urban Core.

Methodology

Texas Transportation Code, Section 545.356, and City of Austin Code, Chapter 12, give authority to municipalities to alter speed limits based an engineering and traffic investigation by a professional engineer. This speed modification report fulfills this engineering study requirement under authority of the Office of the City Traffic Engineer.

Speed Modification Report – City of Austin Level 3 and 4 Streets Outside of the Urban Core P a g e | 3 May 11, 2022

The traditional transportation engineering methodology of investigating and recommending speed limits relies on the 85th percentile of vehicular speeds. This is based on the premise that drivers under unimpeded, free-flowing traffic conditions choose to travel at safe and prudent speeds for themselves and others. This methodology has limitations in urban settings where other considerations, such as turning conflicts, driveway density, and traffic signals, impede the natural flow of traffic and require more attention for drivers to operate safely.

ATD researched emerging national practice for setting speed limits that are more applicable to this network and decided to use an expert systems methodology for this engineering study. Expert systems are credited with starting in Australia and were based on numerous data collection studies and observations by engineering experts. These findings were used to develop computer programs replicating the thought processes and judgments of these experts based on a variety of street operating characteristics. Completed in 2006, NCHRP 03-67: Expert System for Recommending Speed Limits in Speed Zones was one of the first studies in the United States "to develop a new knowledge-based expert system for recommending enforceable, credible speed limits in speed zones," resulting in the original USLIMITS methodology.

The Federal Highway Administration (FHWA) subsequently released USLIMITS2 as a web-based tool to develop credible and consistent speed limits. Rather than relying foremost on the 85th percentile of vehicular speeds, USLIMITS2 uses these additional inputs in its methodology:

- 50th percentile speed
- · Section length of streets
- Annual average daily traffic
- Adverse alignment
- One- or two-way operation
- Divided or undivided streets
- Number of through lanes

- Area type (adjacent development)
- Number of driveways/uncontrolled access points
- · Number of traffic signals
- On-street parking and usage
- Pedestrian and bicycle activity
- Crash data

After working with FHWA representatives for firsthand instruction on this tool, ATD used USLIMITS2, combined with engineering judgment, to develop speed limit modifications in this engineering study. Appendix A includes a detailed summary of USLIMITS2 input values and output recommendations used for each engineering study. Appendix B includes maps of existing speed limits, speed limits recommended by ATD, and changes between the two values. National research and guidance materials on setting appropriate speed limits are included in Appendix C.

Findings and Recommendations

ATD analyzed 121 Level 3 and 4 streets located outside of the Urban Core using street characteristic inputs and USLIMITS2 methodology. The Office of the City Traffic Engineer applied engineering judgment to further reduce the speed limits on some streets resulting from the USLIMITS2 methodology based on continuity of speed limits on a street or consistency of speed limits with comparable streets. This engineering judgment was applied to harmonize speeds along arterials and to also maintain driver expectation for the purposes of safety.

Some roadways within the City of Austin have posted speed limits but are not formally documented in the City's Code of Ordinances. These roadway segments with undocumented speed limits were also studied and are included in Table 1 if the recommended speed is lower or equal to the posted speed.

Overall, speed limit reductions on 48 of these street segments were found to be appropriate, resulting in recommended reductions of 5 mph on 38 street segments, reductions of 10 mph on nine street segments, and a reduction of 15 mph on one street segment. One street segment with an existing posted speed limit but not in the Code of Ordinances is recommended to remain at the posted speed limit.

Recommendation 1: Speed limits should be modified in or added to the City's Code of Ordinances per Table 1.

Table 1: Recommended Speed Limit Modifications

Council	Street	Exte	nts	Exist. Speed	Prop. Speed	
District		From To			Limit	
1	Canyon Ridge Drive (West)	IH-35 (North) East Frontage Road	Tech Ridge Boulevard	40	35	
1	Dessau Road/ Cameron Road	Park Center Drive	580 feet north of Brighton Lane	45	40	
1	Dessau Road	580 feet north of Brighton Lane	Meadowmear Drive	50	40	
1	Harris Branch Parkway	Parmer Lane	Gregg Lane	50*	45	
1	Harris Branch Parkway	700 feet north of Farmhaven Road	Parmer Lane	50	40	
1	Howard Lane (East)	Dessau Road	Immanuel Road	50	45	
1 & 4	Ru therford Lane	U.S. 183 (Anderson Lane) (East)	I.H. 35 (North) East Frontage Road	40	35	
1	Tuscany Way	U.S, 290	2,500 feet north of U.S. 290	40	35	
2	Bluff Springs Road	William Cannon Drive (East) Austin City Limits Line		45	35	
2 & 5	B radshaw Road	River Plantation Drive	Austin City Limits Line north of Kleberg Trail		40	
2	Bu rleson Road	U.S. 183	F.M. 973	55*	45	
2	McKinney Falls Parkway	Burleson Road	U.S. 183	.55	40	
2	M etro Center D rive	Riverside Drive (East)	End of Metro Center Drive	40	35	
2	Pearce Lane	Ross Road	Welsh Way	50*	40	
2	Ross Road	Pearce Lane	Austin City Limits Line north of Gilwell Drive	40*	35	
2	Stassney Lane (East)	Teri Road	1,200 feet South from Burleson Road	50	40	
2	Teri Road	I.H. 35 (South) East Frontage Road	Nuckols Crossing Road	35	30	

3	Stassney Lane	Stassney Lane Congress Avenue (East) (South)		45	35
4 & 7	Kramer Lane	Burnet Road	Frontage Road Lamar Boulevard (North)	40	35
4	Payton Gin Road	U.S. 183 East Frontage Road	Lamar Boulevard (North)	35	30
4 & 7	Rutland Drive	Burnet Road	200 feet east of Golden Meadow Drive	40	35
5 & 8	Brodie Lane	300 feet south of Alexandria Drive	Slaughter Lane (West)	45	40
5 & 2	Slaughter Lane (East)	I.H. 35 (South) East Frontage Road	Brandt Road	45	40
5 & 2	Slaughter Lane (West)	Menchaca Road	IH 35 (South) East Frontage Road	45	40
5	Slaughter Lane (West)	Brodie Lane	Brasher Drive	4 5	40
5	West Gate Boulevard	Manassas Drive	William Cannon Drive (West)	35	30
6	Four Points Drive	R.M. 620	River Place Boulevard	45	40
6	Lake Creek Parkway	R.M. 620	U.S. 183	40	35
6	McNeil Drive	U.S. 183	Parmer Lane	45	40
6	Pond Springs Road	U.S. 183 (Frontage Road) (Northbound)(north intersection)	Hunters Chase Drive	40	35
6	Wilson Parke Avenue	R.M. 620	Woodbay Parke Drive	50	40
7	Center Line Pass	CenterRidge Drive	W Howard Lane	40	35
7	Gracy Farms Lane	Metric Boulevard	Loop 1 (MoPac Expressway) (North) East Frontage Road	40	35
7	Howard Lane (East)	Dessau Road	I.H. 35 (North) West Frontage Road	50	45
7	McCallen Pass	Parmer Lane	Howard Lane	50	45
7	Metric Boulevard	Staton Drive	Howard Lane	50	40
7	Metric Boulevard	Scofield Lane	Staton Drive	45	40
7	Stonelake Boulevard	Loop 360 (Capital of Texas Highway) (North)	Braker Lane (West)	45	40
8	B rodie Lane	F.M. 1626	Austin City Limits Line north of Sunland Drive	40*	40
8	Old Bee Caves Road	U.S. 290/S.H. 71(West)	Austin City Limits Line	40	35
8	Southwest Parkway	Boston Lane	Austin City Limits Line west of Amara Trail	55	50

Speed Modification Report – City of Austin Level 3 and 4 Streets Outside of the Urban Core $P \ a \ g \ e \ | \ 6$ May 11, 2022

8	Vega Avenue	William Cannon Drive (West)	Southwest Parkway	45	40
8	Escarpment Boulevard	Davis Lane	William Cannon Drive (West)	40	35
10	35th Street (West)	Balcones Drive	Loop 1 (MoPac Expressway) (North) West Frontage Road	35	30
10	City Park Road	F.M. 2222	Austin City Limit Line west of Bridge Point Parkway	40*	35
10	Far West Boulevard	Chimney Corners	Loop 1(MoPac Expressway) (North) West Frontage Road	35	30
10	Great Hills Trail	Stonelake Boulevard	Loop 360 (Capital of Texas Highway) (North)	- 35	30
10	Jollyville Road	Balcones Woods Drive	Great Hills Trail	45	40
10	Jollyville Road	N Capital of Texas Highway	Business Park Drive	35	30

^{*} Existing speed limit is not documented in the City's Code of Ordinances. Listed existing speed limit is posted speed.

Four roadways in Table 2 within the City of Austin full purpose jurisdiction have no posted speed limits and are not included in the City's Code of Ordinances. The Office of the City Traffic Engineer applied engineering judgment to recommend speed limits on these streets to be added to the Code of Ordinances.

Recommendation 2: Speed limits should be formally set in the City's Code of Ordinances per Table 2.

Table 2: Recommended Streets for Code of Ordinances Speed Limit Establishment

Council District		Ext	tents	Posted	Prop.
	Street	From	То	Speed	Speed Limit
	B en Garza Lane	Brodie Lane	Loop 1 (MoPac Expressway) (South)	None	35
7	Center Lake Drive	Howard Lane (East)	Parmer Lane (East)	None	40
7	Lakeline Mall Drive	U.S. 183 (North) (Research Boulevard)	Terminus east of Lyndhurst Street	None	35
6	Stonehollow		Metric Boulevard	None	35

Speed Modification Report – City of Austin Level 3 and 4 Streets Outside of the Urban Core $P \ a \ g \ e \ | \ 7$ May 11, 2022

Per Texas Transportation Code, Section 545.356, speed limit modifications set by municipalities are effective when signs are posted messaging new speed limits. For operational purposes, ATD recommends Council approve the new speed limits pending placement of the signs as per our normal process, giving the Office of the City Traffic Engineer the administrative authority to place the signs as quickly as is feasible.

Recommendation 3: ATD will develop a signage installation plan to evaluate signage needed for streets impacted by Recommendations 1 and 2 of this engineering study. This plan will include the following:

- Design and place signage to set speed limits on streets. This includes methods to increase sign
 conspicuity, which could include increased sign size, non-typical colors, and supplemental
 safety messages. A standard sign spacing will be developed, which could include a maximum
 distance between speed limit signs and consistent placement before and after intersections
 with major streets.
- Prioritize sign placement for streets with school zones and if within the City's designated High-Injury Network. Signs will be prioritized first if a school zone is located within the modified speed zone. Signs will be prioritized second if the modified speed zone is located within the City's designated High-Injury Network. Subsequent sign installation will be prioritized based on documented safety concerns and geographic dispersion.
- Estimate the time needed to install all needed sign changes citywide based on staff availability and material costs to make set speed limits effective.

Education and Enforcement

ATD's review of best practices revealed that comprehensive speed limit modifications are most effective when coupled with public awareness efforts as they help reach a broad audience with a focused, consistent message to bring attention to the purpose and desired outcomes of speed limit modifications.

Recommendation 4: ATD will conduct a citywide public awareness effort to increase awareness of the pending speed limit modifications. ATD will ensure that educational awareness materials are culturally relevant and that they explain the need for the change and their intended safety goal. ATD will partner with law enforcement agencies to achieve the intended speed outcome through targeted education and enforcement activities, particularly on streets with documented speeding concerns.

Conclusion

The speed limit modifications recommended in this engineering study are the result of a comprehensive, years-long traffic investigation of Level 3 and 4 streets outside the Urban Core in the City of Austin. It is a progressive and bold approach based on national best practice to modernize the speed limits on Level 3 and 4 streets which represent the highest propensity of serious injuries and fatalities in the City. These recommendations will help increase the safety of all users of the street network by setting speed limits to safe and prudent levels.

APPENDIX A

Contents:

USLIMITS2 Speed Zoning Reports

			USLIMITS	Z An	alysi	and	Keco	mei	ndaitons		_	100						GM .			
Roadway Name	Section Limit 1 Report	Section Limit 2 Report	Area Type	Average 25th Fercentile Speed	Average 50th Percentile Speed	Section Longth in Miles	AAOT	Adverse Allenment	Dwided / Undwided/ Two-Way-faft-Tum-lane	Number of Through Lanes (both directions)	Number of Unsignatized Access Points	Number of Signals	On Street Parking and Usage	Pedestrian/Micyclist Activity	Number of Crambes (2017- 2021)	Number of Injury/Fatel Oracles (2017-2021)	Cresh Rate per 100n/WM	Injury Pace per 100M/VM	Editing Speed Unit	Lowest USUMITS2 Recommendation	The state of the s
en Gerza Lane	Brodle Lane	(South)	Complex	39.7	34.7	0.5	1000	NO	TWLTL	2	6	1	LOW	LOW	7	4	799	467 .	N/A	35	3
uff Springs Road	William Cannon Drive (East)	Austin City Umits Une	Res-Collector	48.2	42,5	ы	9138	NO	Undivided	4	20	3	Low	Low	147	64	701	324	45	40	1
radahaw Road	River Plantation Drive	Austin City Umits Line north of IGebers Trail	Res-Collector	21	37.0	0.9	1817	NO	Undivided	2	11	0	LOW	LOW	9		200	128	-	40	1
rodia Lane	300 feet south of Alexandria		Commercial	41.7	37.4	ш	15496	NO	Divided	4	50	5	Low	High	136	35	215	Q	45	35	T
	Drive	Austin City Umits Use north		GCS-Inc		0/2000		HE-EX				Color.		110000		SLIBB	CHILDRY.		HORNE	-00000	٠
rodia Lune	F.M. 1626	of Sunland Drive	Res-Collector	49.7	39.5	1.5	7928	NO	Undivided	2	18	3	Low	LOW	47	ט	230	83	40	40	L
Aurieson Road	U.S. 163	F.M. 973 Parmer Lane	Complex	61.8 39.3	30.3	1.2	10070	WO	Undivided TWLTL	4	17	0	Low	LOW	113	2	307	182	SS N/A	40	
Center Lake Orive Benter Une Pass	Howard Lane (East) Center Ridge Drive	Howard Lane (West)	Complex	39.3	34.2	0.5	1079	NO	Undivided	4		1	Low	Low	44	12	475A	1257	40	35	
City Park Road	F.M. 2222	880ft west of Bridge Point Pinny	Res-Callector	49.5	38.9	Li	4073	YES	Undivided	2	15	1	Low	Low	37	v	453	206	40	40	1
	M-4	580 feet north of Brighton	Commercial	-	46.8		20477		Divided		10	1	Low	Low	76	D	357	1277	50	40	1
Desagu Roed	Messiowness Drive	Lane	Commercia	52.7		0.4	2411	NO	DAIRE	•	-	•	LOW	-	/*	-	357	4,	~	-	H.
Desum Rood/ Sumeron Rood	Partor Center Drive	SAO feet north of Brighton Lane	Commercial	52.7	46.8	1.1	27477	NO	Divided	6	15	2	Low	Low	220	40	357	127	45	40	1
Staseney Lane (Bast)	Congress Avenue (South)	I.H. 35 (South) West	Complex	46.3	41.7	0.4	12443	NO	Divided	6	13	2	Low	High	211	73	1236	429	46	40	١,
		1200ft South from Burleson				- United		1000		52253											+
Stassenery Lane (East)	Terl Road	Roed	Commercial	41	42.4	LO	1997	NO	Divided	4	4	1	Low	High	30	2	93	7	50	40	1
carpment Boulevard	Davis Lane	William Cannon Drive (West)	Residential Subdivisions	46.1	40.9	1.5	7937	NO	Divided	4	16	3	Low	High	56	22	254	100	40	40	3
For West Boulevard	Chimney Corners	Loop I(MaPec Expressey)	Commercial	40.8	34.1	LI	9244	NO	Divided	4	30	4	Low	High	25	30	442	196	35	30	١,
TI STATE OF THE ST	R.M. 620	(North) West Frontage Road River Place Boulevard	Complex	40.5	4L7	0.4		YES	Divided	4	12	-	LOW	Low	26	6	463	107	6	40	+
Four Points Drive		Loop 1 (MaPec Bapressay)	THE PERSON NAMED IN	42.5	20.7		3996	FOR T	Telalisation .	2	19	3		2,615	1200	13	581	172	40	35	
Gracy Ferms Large	Metric Boulevard	(North) East Frontage Road	Commercial	44.5	2.7	0.9	4764	NO	TWLTL	-	-	,	LOW	High	44	1.5		4/2	-	-	H.
Great Hills Trail	Stonelake Roulevard	Loop 360 (Capital of Texas Highway) (North)	Commercial	41.3	36.3	1,5	6145	AE2	Divided	4	26	5	Low	High	101	21	993	123	35	30	3
Harris Branch Parkers	Parmer Lane	Great Lane	Res-Collector	50.5	44.0	1.0	9919	NO	Divided	4	10	2	Low	Low	70	25	304	115	50	45	1
	700 feet north of Farmhever						0.000														+
Harris Branch Parkeruy	Roed	Parmer Lane	Res-Collector	50.5	44.8	2,5	9919	NO	Divided	4	20	2	Low	Low	120	50	304	115	50	40	1
lowerd Lane (Bart)	Desseu Road	I.H. 35 (North) West	Complex	59.2	46.9	24	20095	NO	Divided	4	30	5	Low	Low	386	160	419	163	50	45	1
lowerd Lane (East)	Domeu Road	Frontige Road	Complex	50.5	44.3	0.5	11428	NO	Divided	4	5	1	LOW	Low	31	9	323	94	50	45	1
oliyelile Road	Belcones Woods Drive	Great Hills Trail	Complex	47.5	414	0.9	11021	NO	TWLTL	4	31	3	Low	LOW	134	39	716	176	-	40	1
allyville Roed framer Lane	N Capital of Texastichway Burnet Road	Business Park Orive Lamar Bouleverd (North)	Res-Collector	37.0 41.9	31.7	2.3	797	NO	TWLTL	2	90	5	LOW	High	204	61	740	221	40	36	1
Lake Creek Parkway	R.M. 620	U.S. 163	Res-Cellector	36.4	92.1	1.6	6642	MO	Divided	4	40	_	LOW	High	64	15	330	77	40	30	1
akeline Mail Drive	U.S. 183 (North) (Research	Terminus east of Lyndhurst	Commercial	41.7	35.3	1.0	2905	NO	Divided	2	10	2	High	High	95	20	1743	367	N/A	35	1
McCallen Pass	Besieverd) Permer Lane	Street Howard Lane	Commercial	5L8	45.4	LO	9505	NO	Divided	4	6	3	Low	Low	ZZA	99	1304	576	50	45	1
McCorney Falls Performey	Burleson Road	U.S. 163	Res-Callector	47.7	42.9	LO	5A67	NO	Undivided	2	9	1	Low	High	20	21	550	211	25	40	F
Motell Drive Metric Boulevard*	U.S. 183 States Drive	Permer Lane Howard Lane	Res-Callector	47.7	42.4	3.2	19553	YES	Divided	4	93	10	LOW	High	<i>III</i>	107	457	100	50	40	1
Metric Boulevard*	Scoffeld Lane	Station Drive	Res-Callector	47.7	42.4	3.2	16026	YES	DMded	4	44	10	Low	High	378	107	300	130	6	40	L
Metro Center Drive Old Bee Caves Road	Riverside Drive (Past) U.S. 291/S.H. 71(West)	end of Metro Center Orive. Austin City Umits Une	Commercial Res-Collector	44.6	到.7	3.1	1750	NO	Undivided	2	96	1	Low	Low	54	12	357	73	40	35	1
Payton Gin Road	U.S. 163 East Frontage Rose	Lamar Soulevard (Horth)	Res-Collector	32.0	26.4	Li Li	9349	NO	TWLTL	2	51	3	Low	High	141	97	700	233	35	25	ti
Pearce Lane	Ross Road	Welsh Way	Residential	46.1	39.3	0.9	10840	NO	Undivided	2	10	1	LOW	Low	77	29	428	161	50	40	1
Pond Springs Road	U.S. 163 (Frantage Road) (Northbound)(north	Hunters Chase Drive	Subdivisions Commercial	6.1	38.4	1.9	6429	NO	TWLTL	2	90		Low	High	107	24	483	100	40	35	1
	Intersection)	Austin City Umits Une north						-		-	-				-	-	_		-	_	+
Ross Road	Pearce Lane	of Gilwell Ortro	Res-Callector	41.9	38.2	0.7	77312	NO	Undivided	2	10	2	LOW	Low	42	ט	682	195	40	35	13
Rutherford Lane	U.S. 183 (Anderson Lane)	I.H. 35 (North) East Frontage	Commercial	4L2	35.9	15	9114	NO	TWLTL	2	40	4	LOW	High	108	2	439	110	40	30	1 3
Rutland Drive	Gurnet Road	200 feet east of Golden	Res-Collector	40.7	35.2	24	10468	YES	TWLTL	4	112	7	Low	High	333	128	723	276	40	30	1
ALIGURA DATA	COMPLETE NO.	Meadow Drive	Marcanetto		-	-		165	IWEIL	-		ľ	-	-	1000	-	-	-	-		+
Southwest Perkway	Goston Lune	Austin City Umits Line west of Amere Trail	Commercial	57.3	53.5	4.2	15190	YES	Divided	6	50	5	LOW	Low	177	59	120	40	5	50	1
Stonehollow Orive	Metric Boulevard	Metric Boulevard	Complex	42.7	37.3	0.9	1222	AE2	TWLTL	4	19	2	Low	Low	3	11	1,898	549	N/A	35	P
Stonelline Boulevard	Loop 360 (Capital of Texas Highway) (North)	Braker Lane (West)	Complex	SLO	44.4	0.6	3522	NO	Divided	•	•	2	Low	Low	83	26	2154	676	6	40	L
Teri Rosd	I.H. 35 (South) East Fronting	Nuckols Crossing Road	Res-Collector	38.1	32.1	14	4220	NO	Undivided	2	120	1	High	High	127	35	1170	322	55	30	T
Tuncany Way	Road U.S. 298	2,500 feet north of U.S. 250	Complex	39.6	34.5	0.9	9037	YES	TWLTL	2	40	1	Low	Low	45	14	317	99	40	30	
	William Cannon Drive	Southwest Perkway	Res-Callector	68.4	38.5	u	1772	YES	Undivided	2		0	LOW	Low	25	4	991	159	6	40	T
Vega Avenue	(West)	Loop 1(MePer Expressury)			1935	1510151										18.3					
Vega Avenue	Belcones Drive	(North) West Frantage Road	Res-Collector	40.5	35.8	0.7	9855	NO	Undivided	4		3	Low	LOW	29		256	65	.5	40	1
			Res-Callector	40.5	35.6	1.9	7864	YES	Undivided	2	32	2	LOW	High	108	46	407	173	40	35	1
30th Street (West)	III-35 (Narth) East Frontage	Tech Ridge Boulevard	1105 001104101	-	44.3	5.1	28715	YES	Divided	6	156	19	Low	High	942	384	350	1/8	-6	40	t
Vegi Avenue 1986 Street (West) Conyon Ridge Drive (West Slaughter Lane (West)		Brasher Orive	Res-Callector	50.5	463	_					1	1	Low	High	942	1			-6	40	
35th Street (West) Conyon Ridge Orive (West) Claughter Lane (West)	Roed	Brasher Orive IH 35 (South) East Prortage		50.5 50.5	443	5.1	2850.5	AER	Divided	6	155	19	LOW.		344	384	350	149			_
Sith Street (West) Carryon Ridge Drive (West) Slaughter Lane (West) Slaughter Lane (West)	Road Brodle Lane	Brasher Orive IH 35 (South) East Prontage Road	Res-Callector	50.5	443	5.1			- 11 L 1 L 1 L 1 L 1 L 1 L 1 L 1 L 1 L 1	٠		-							-	40	
Sith Street (West) Carryon Ridge Drive (West) Slaughter Lane (West) Slaughter Lane (West)	Road Brodie Lane Menchaca Road	Brainer Drive IH 35 (South) East Frontage Road Brandt Road	Res-Callector				28935 28935	YES	Divided Divided	•	155	19	Low	High	942	384	350	149	6	40	
39th Street (West) Curryon Ridge Drive (Wes	Road Brodle Lane Menchaca Road I.H. 35 (South) East Frontage	Brasher Orive IH 35 (South) East Prontage Road	Res-Callector	50.5	443	5.1			- 11 L 1 L 1 L 1 L 1 L 1 L 1 L 1 L 1 L 1	6		-							5	40	

APPENDIX B

Contents:

Existing Speed Limits (MPH), Non-Urban Core Arterials - North Austin


Proposed Speed Limits (MPH), Non-Urban Core Arterials - North Austin


Difference in Speed Limits (MPH), Non-Urban Core Arterials - North Austin


Existing Speed Limits (MPH), Non-Urban Core Arterials - South Austin


Proposed Speed Limits (MPH), Non-Urban Core Arterials - South Austin


Difference in Speed Limits (MPH), Non-Urban Core Arterials - South Austin

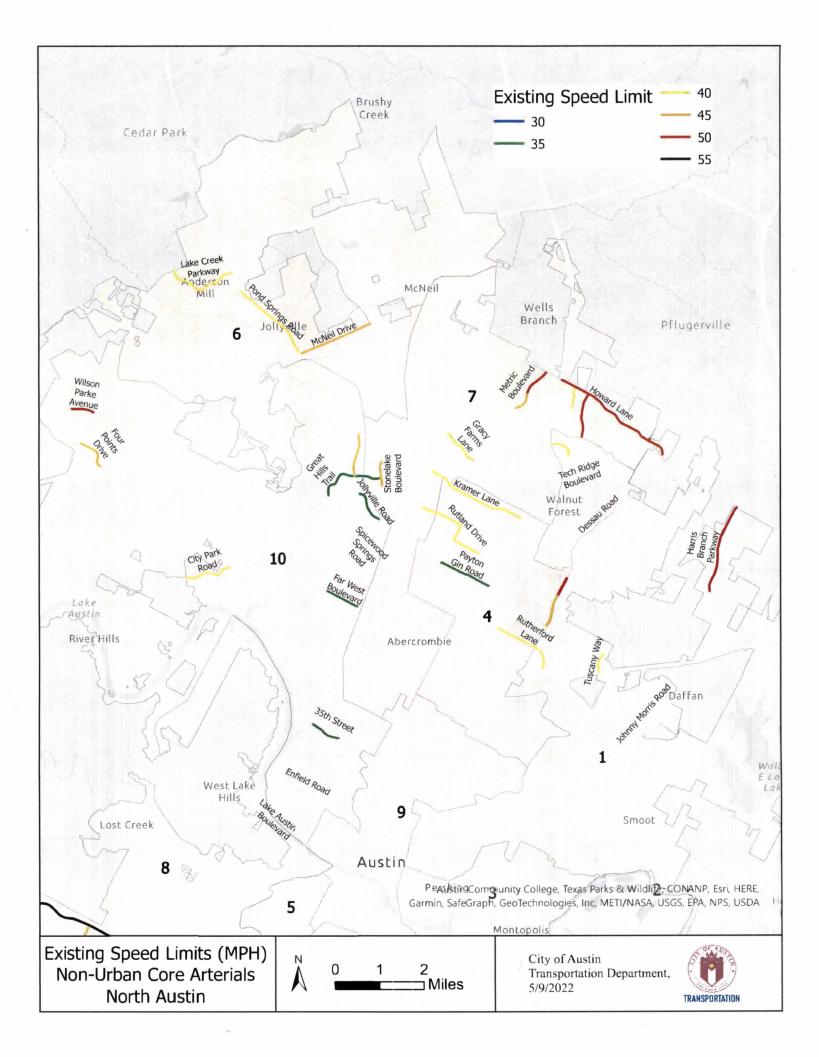


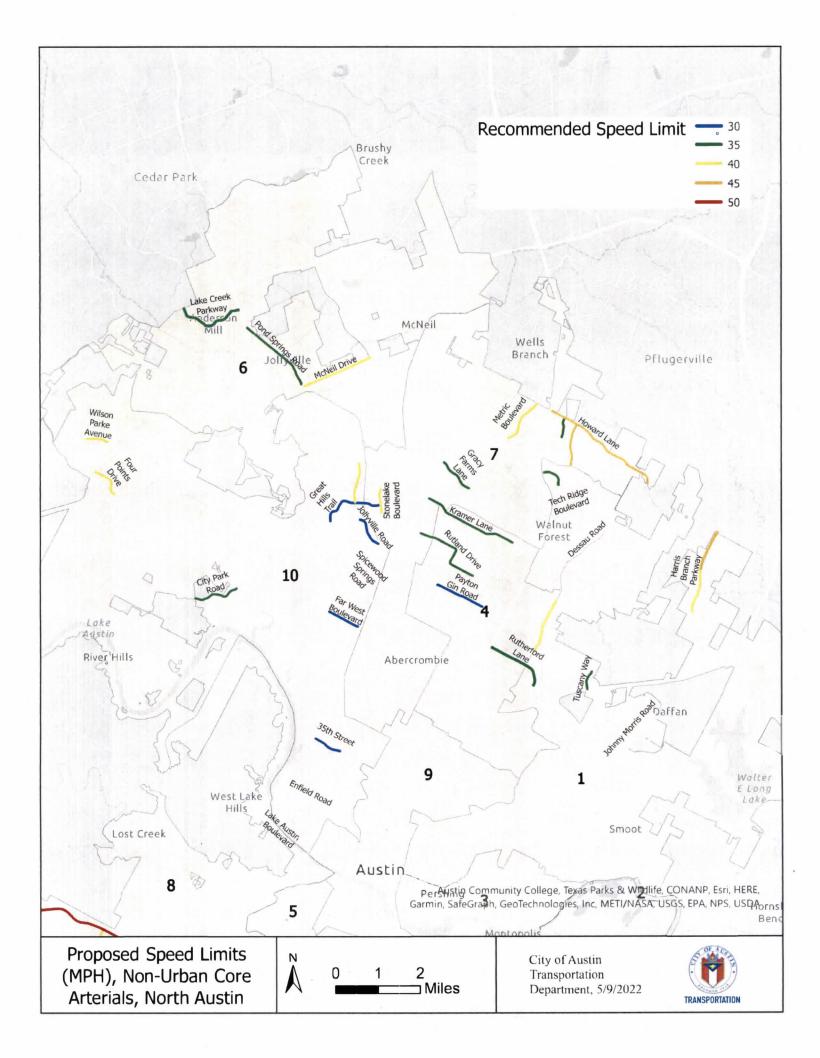

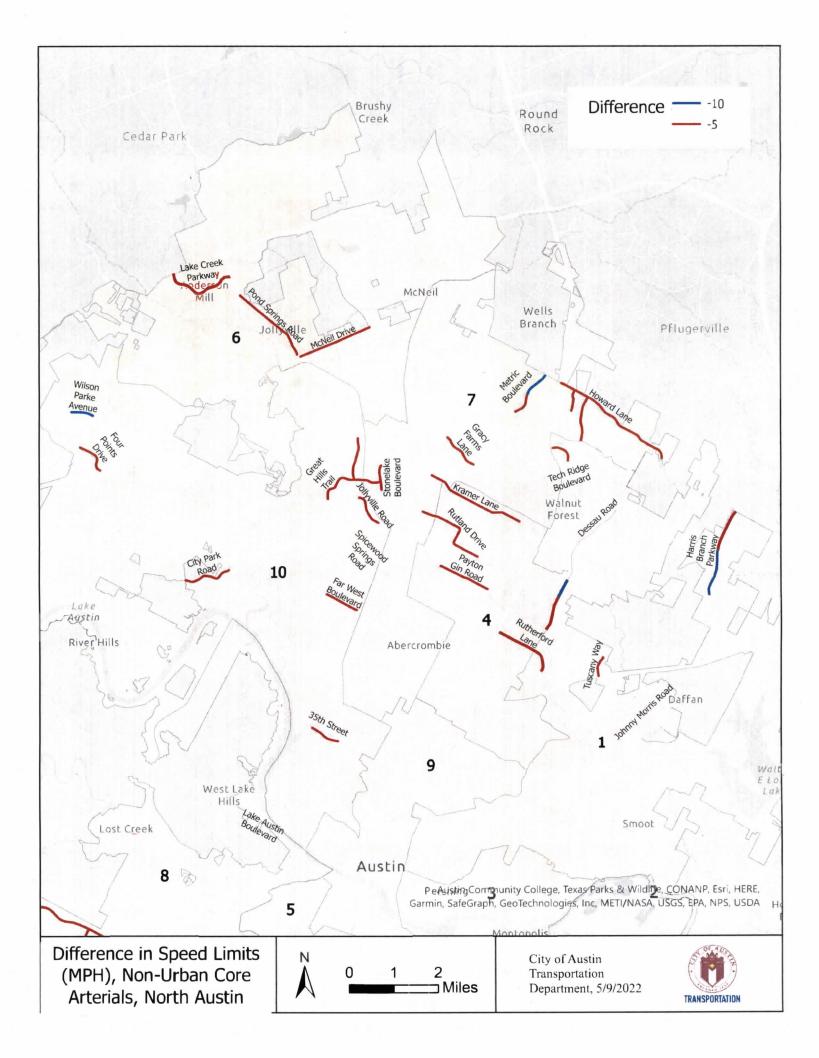

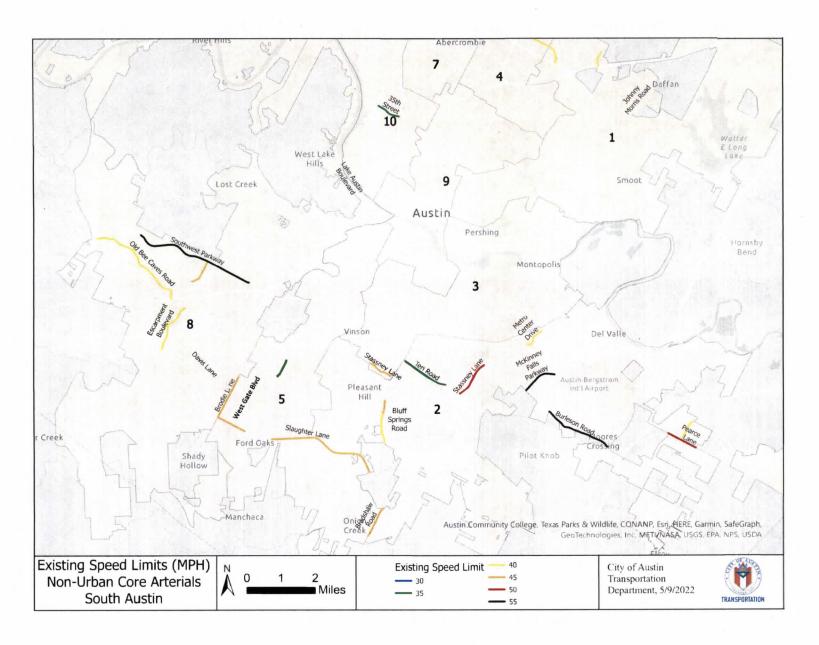

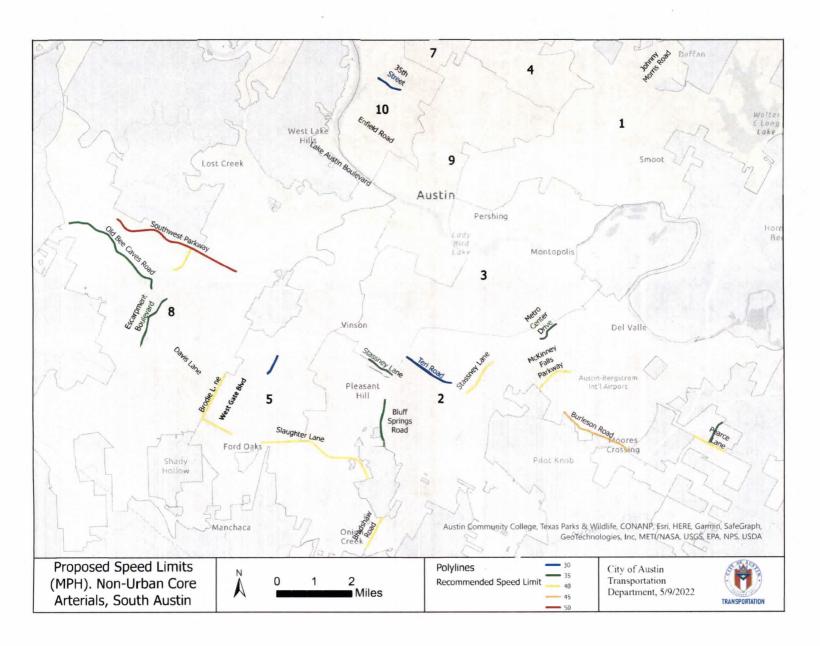

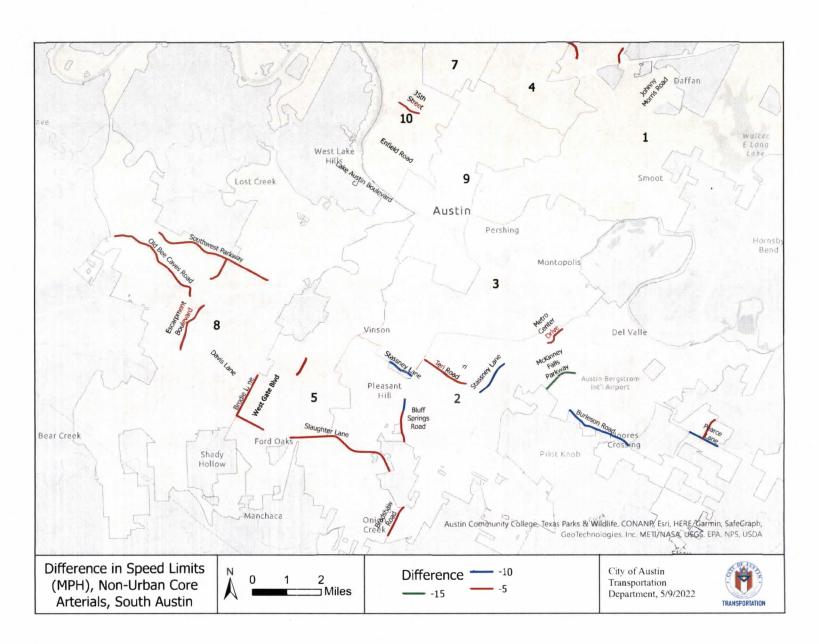


APPENDIX C

Contents:

National Research and Guidance on Setting Appropriate Speed Limits

National Research and Guidance on Setting Appropriate Speed Limits

Numerous national studies and reports mention the critical role that speed plays in severe traffic crashes. The National Transportation Safety Board, the Governors Highway Safety Association, the Insurance Institute for Highway Safety, National Highway Traffic Safety Administration, and the Federal Highway Administration are just a few of the organizations whose work we have reviewed in order to better understand the need for a comprehensive speed management approach.

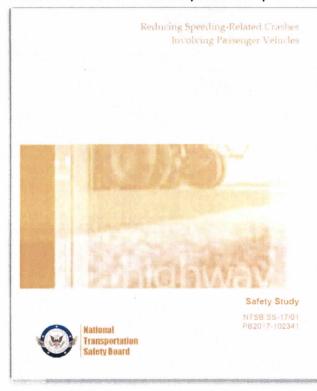

National Transportation Safety Board Safety Study

- found that speed was a documented factor in 31% of all traffic fatality crashes nationally. "Speed—and therefore speeding—increases crash risk in two ways: (1) it increases the likelihood of being involved in a crash, and (2) it increases the severity of injuries sustained by all road users in a crash." The study demonstrates how speeding presents different risks for different road users. People walking, biking, and riding scooters are all much more vulnerable to serious injury or fatality when a speeding car is involved. The risk for vulnerable users more than doubles from 20 MPH to 30 MPH and is increasingly worse at higher speeds. Speed influences the risk of crashes and crash injuries in three ways:
- The distance a vehicle travels from the time a driver detects an emergency to the time the driver reacts is increased.
- The distance needed to stop a vehicle once the driver starts to brake is increased.
- The exponential increase in crash energy. For

example, when impact speed increases from 40 to 60 mph (a 50% increase), the energy increases by 125% (IIHS, 2018b)."

NCHRP 03-67 – This digest presents the results of the study titled "Expert System for Recommending Speed Limits in Speed Zones," describing "research conducted to develop a knowledge-based expert system decision-support tool for recommending speed limits in speed zones on highways and local roads that are considered credible and enforceable." It contains three sections: Research Scope and Motivation; Expert System Decision Rules and their Derivation; and Software Application and its Use.

NATIONAL COOPERATIVE HIGHWAY RESEARCH PROGRAM

Research Results Digest 318

AN EXPERT SYSTEM FOR RECOMMENDING SPEED LIMITS IN SPEED ZONES

This digest presents the results of NCHRP Project 3-67, "Expert System for Recommending Speed Limits in Speed Zones." The study was conducted by a team led by the University of North Carolina Highway Safety Research Center with Wade Trim Associates, Inc. and PB Farradyne, Inc. Raghavan Srinivasan, Senior Transportation Research Engineer at the Highway Safety Research Center, was the Principal Investigator.

SUMMARY

This digest describes research conducted to develop a knowledge-based expert system decision-support tool for recommending speed limits in speed zones on highways and local roads that are considered credible and enforceable. The tool is intended to assist responsible authorities in setting speedzone limits to enhance traffic safety and operating efficiency. The system has been designed to be useful for all types of primary roadways, from rural two lane segments to urban freeway segments. The system does not address statutory limits such as maxi-mum limits set by legislatures for Interstates and other major classes of roadways, temporary or part-time speed limits such as those posted in work zones and school zones, or variable speed limits that change as a function of traffic, weather, and other conditions. The expert system is designed to be implemented as a web-based software application.

The digest is based primarily on the final report for NCHRP Project 3-67, "Expert System for Recommending Speed Limits in Speed Zones" (available from

the project description page of the TRB website: http://www.trb.org/TRBNet/Proj ectDisplay.asp?ProjectD=821). The project reviewed current literature on guidelines, criteria, and procedures used for setting speed limits in speed zones in the United States and experience with use of XLIMITS. USLIMITS, and other existing speed-limit expert systems. A group of subject-matter experts engaged in setting and enforcing speed limits was convened to provide underlying decision rules for the expert system. The software application was developed with consideration of user needs and requirements for long-term management and maintenance of the expert system. (The application can be accessed through the Internet at http://www2.uslimits.org and is available for download and installation on an Internet server from the TRB website at http://www.trb.org/news/blurb_detail.asp? id=7568.)


This digest is organized into three sections and an appendix. The first section describes the motivation for the research and the scope of NCHRP Project 3-67. The second section describes the decision rules embedded in the expert system and how


Summary, 1
Research Scope and Motivation, 2
Expert System Decision Rules and
Ther Derivation, 4
The Software Application and

Appendix: Expert System Decision Rules and Logic for USLIMITS2, 6

TRANSPORTATION RESEARCH BOARD

<u>USLIMITS2</u> – The FHWA developed this web-based tool to "help practitioners set reasonable, safe, and consistent speed limits for specific segments of roads." Its methodology was based on NCHRP 03-67 and uses several factors of street operating characteristics as inputs to develop recommended speed limits. The <u>User Guide</u> and <u>Decision Rules</u> documentation provide further details and guidance on how to use the USLIMITS2 tool.

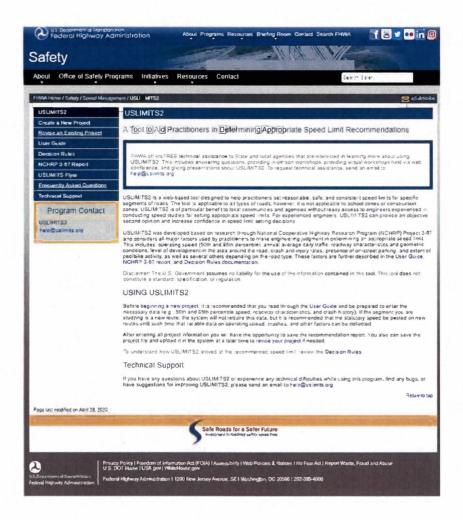


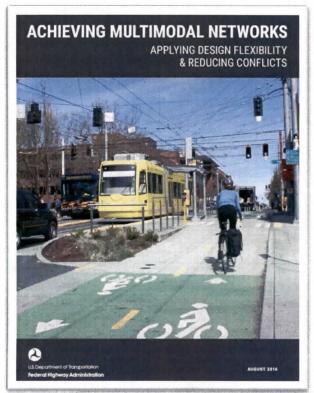


FHWA "Achieving Multimodal Networks" -

Safety as a Guiding Principal: "Where modes come together, the design should eliminate conflicts to the greatest extent possible. If it is not feasible to eliminate the conflict entirely, designers should minimize the speed differential between modes to ensure that if a crash occurs, the severity of the injury is likely to be lower...Designers have the flexibility to set design speeds lower than the posted speed limit."

Page 23:

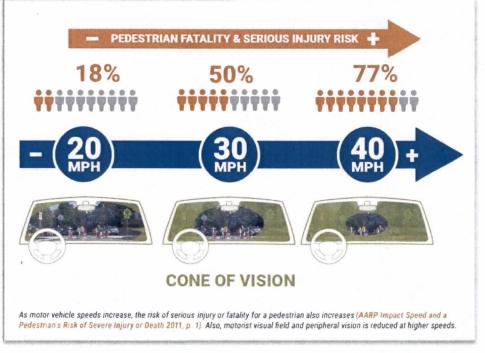

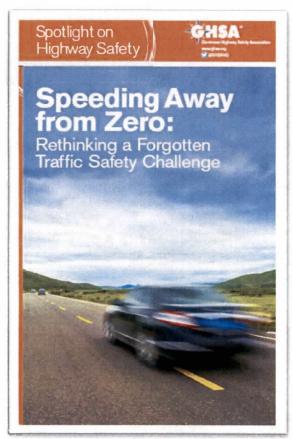

Governors Highway Safety Association - "Speeding remains a publicly-accepted driving behavior that is reinforced among motorists, policymakers and transportation stakeholders. National surveys of U.S. drivers have found that although drivers identify speeding as risky, drivers nonetheless continue to speed. Drivers have a minimal perception of risk of either getting a ticket, causing a crash, or violating social norms."

"Research has shown raising speed limits to match the 85th percentile speed increases the average operating speed of the roadway, consequently increasing the 85th percentile speed."


"In 2013, the Washington legislature enacted a law allowing municipalities to establish a maximum speed limit of 20 mph in a residential or business district. This new law mandates that a reduced speed need not be based on any traffic or engineering studies, which were acknowledged as procedural roadblocks to making speed limit changes. The law also allows a municipality to reinstate a former speed limit if deemed necessary within a year of its change without a traffic or engineering study. New York City, which has a high-

profile Vision Zero initiative, reduced its citywide speed limit to 25 mph as authorized by a 2014 New York State law. As of January 9, 2017, Boston reduced its default speed limit from 30 mph to 25 mph. IIHS evaluated the effects of this speed limit reduction and found that the reduction was associated with a 0.3% reduction in mean speeds. However, when looking at the odds of vehicles exceeding 25 mph, 30 mph, and 35 mph, reductions were increased to 2.9%, 8.5%, and 29.3% respectively. This study concluded that lowering the speed limit in urban areas is an effective countermeasure to reduce speeds and improve road safety (Hu and Cicchino, 2018b)."

Report Recommendation: Improve State and Local Policy

"Support Speed Limits According to Vision Zero Principles: States and localities should set reasonable speed limits in accordance with Vision Zero principles in built-up areas where there is a mix of vulnerable road users and motor vehicle traffic, at intersections and locations with a high risk of side collisions, and on rural roads without a median barrier to reduce the risk of head-on collisions.

States should also provide local communities with discretion to set speed limits and deploy speed management countermeasures in order to meet local needs."

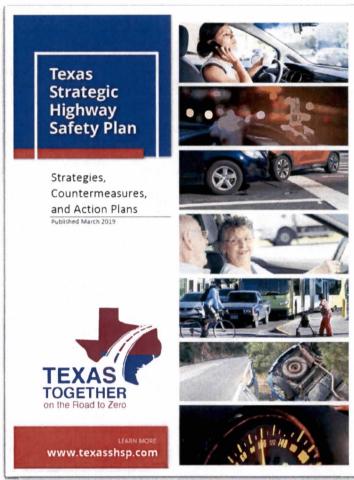

Texas Strategic Highway Safety Plan -

Pedestrian Safety, Strategy 6A Encourage use of target speeds that
consider pedestrians, land use, and the
roadway context (e.g., a target speed of
35 mph or less on arterials). Other
examples are to provide design flexibility
guidance for techniques to reduce
operating speeds on surface streets;
encourage use of tree-lined medians,
bicycle lanes, and safe and attractive
pedestrian crossings and walkways; and
support use of traffic calming for local
streets.

All Users Safety, 6B - Design new roadways for a target speed appropriate for the adjacent environment and safety of all users rather than for a design speed intended to maximize motor vehicle speeds.

Speeding Strategy 1: Encourage use of target speeds for arterial, collector, and local roadways; encourage use of target speeds with pedestrian, land use, and roadway context, including options for

target speeds of 35 mph or less on arterials and the evaluation of existing speed limits to appropriate target speeds.





OVERVIEW

OCTOBER 2012

NACTO Urban Street Design Guide -

"There is a direct correlation between higher speeds, crash risk, and the severity of injuries... Design streets using target speed, the speed you intend for drivers to go, rather than operating speed. The 85th percentile of observed target speeds should fall between 10–30 mph on most urban streets."