AUG 24 2026 AM11:17

RULE NO. R161-26.27

NOTICE OF PROPOSED RULE **POSTING DATE: August 24, 2026**

The Director of Austin Transportation and Public Works proposes to adopt the following rule on October 1, 2026.

EFFECTIVE DATE OF PROPOSED RULE

A rule proposed in this notice may not become effective before the effective date established by a separate notice of rule adoption. A notice of rule adoption may not be posted before September 25, 2026, or after November 2, 2026 (the 70th day after the date of this notice).

If a proposed rule is not adopted on or before the 70th day, it is automatically withdrawn and cannot be adopted without first posting a new notice of proposed rule.

REQUEST FOR COMMENTS ON PROPOSED RULES

The City requests comments from the public with respect to the proposed rules included in this Notice. Comments must be submitted in writing to the contact person below no later than September 24, 2026. A summary of the written comments received will be included in the notice of rule adoption that must be posted for the rule to become effective.

Contact Person:

Amber Hutchens, Capital Program Consultant
Austin Transportation and Public Works Department
Amber.Hutchens@austintexas.gov
512-947-5646

TEXT OF PROPOSED RULE

The text of the proposed rule indicating changes from the current text is attached to this Notice.

BRIEF EXPLANATION OF PROPOSED RULE

Rule R161-26.27 proposes a new C.I.P Project Sign for the Standards Manual and deletes previous versions of the sign.

An affordability impact statement regarding the proposed rule is available by contacting Amber Hutchens, amber.hutchens@austintexas.gov or 512-974-5646.

AUTHORITY FOR ADOPTION OF PROPOSED RULE

The authority and procedure for adoption of a rule to assist in the implementation, administration, or enforcement of a provision of the City Code is provided in City Code Chapter 1-2 (*Adoption of*

Rules). The authority to repair and maintain the roadways and facilities in the roadways is established in City Code Section 25-6-268 (*Roadway Maintenance).*

CERTIFICATION BY CITY ATTORNEY

By signing this Notice of Proposed Rule R161-26.27, the City Attorney certifies the City Attorney has reviewed the rule and finds that adoption of the rule is a valid exercise of the Director's administrative authority.

REVIEWED AND APPROVED:

Richard Mendoza, P.E., Director
Austin Transportation and Public Works

Date: 8-21-26

Deborah Thomas, City Attorney

Date: 8-24-26

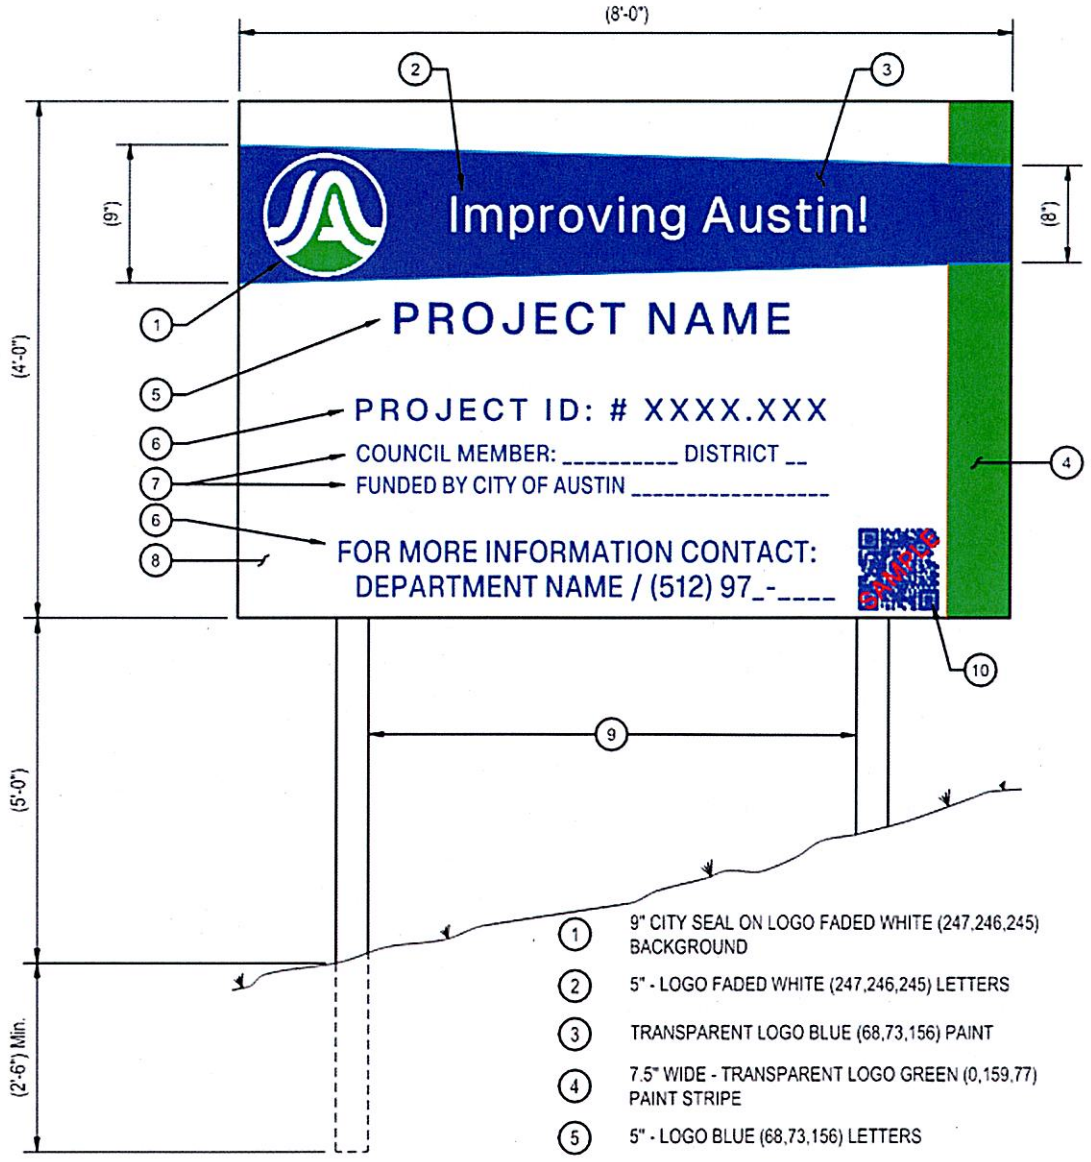

1. 9" CITY SEAL ON LOGO FADED WHITE (247,246,245) BACKGROUND
2. 5" - LOGO FADED WHITE (247,246,245) LETTERS
3. TRANSPARENT LOGO BLUE (68,73,156) PAINT
4. 7.5" WIDE - TRANSPARENT LOGO GREEN (0,159,77) PAINT STRIPE
5. 5" - LOGO BLUE (68,73,156) LETTERS
6. 3" - LOGO BLUE (68,73,156) LETTERS
7. 2" - LOGO BLUE (68,73,156) LETTERS
8. WHITE BACKGROUND ON PLYWOOD, NON-REFLECTIVE. PAINT REQUIREMENTS FOR BACKGROUND AND POST, BLUE TONED WHITE 93-21667 CROSS ALLEN OR EQUAL.
9. 4"X4" CLASS 6 WOOD POST PAINTED WHITE
10. 10"x10" LOGO BLUE (68,73,156) QR CODE LINK TO CONSTRUCTION PROJECT WEB PAGE

NOTES:

1. ALL MATERIALS SHALL BE FURNISHED BY THE CONTRACTOR.
2. IF SIGN IS USED IN PHASED CONSTRUCTION, POSTS SHALL BE MOUNTED ON SKIDS. SEE STANDARD 804S-5, SHEET 5 OF 13.
3. SIGN MUST BE IN COLOR.

CITY OF AUSTIN CAPITAL DELIVERY SERVICES	8'x4' C.I.P. PROJECT SIGN	
	THE ARCHITECT/ENGINEER ASSUMES RESPONSIBILITY FOR APPROPRIATE USE OF THIS STANDARD.	STANDARD NO. 802-1 1 OF 1

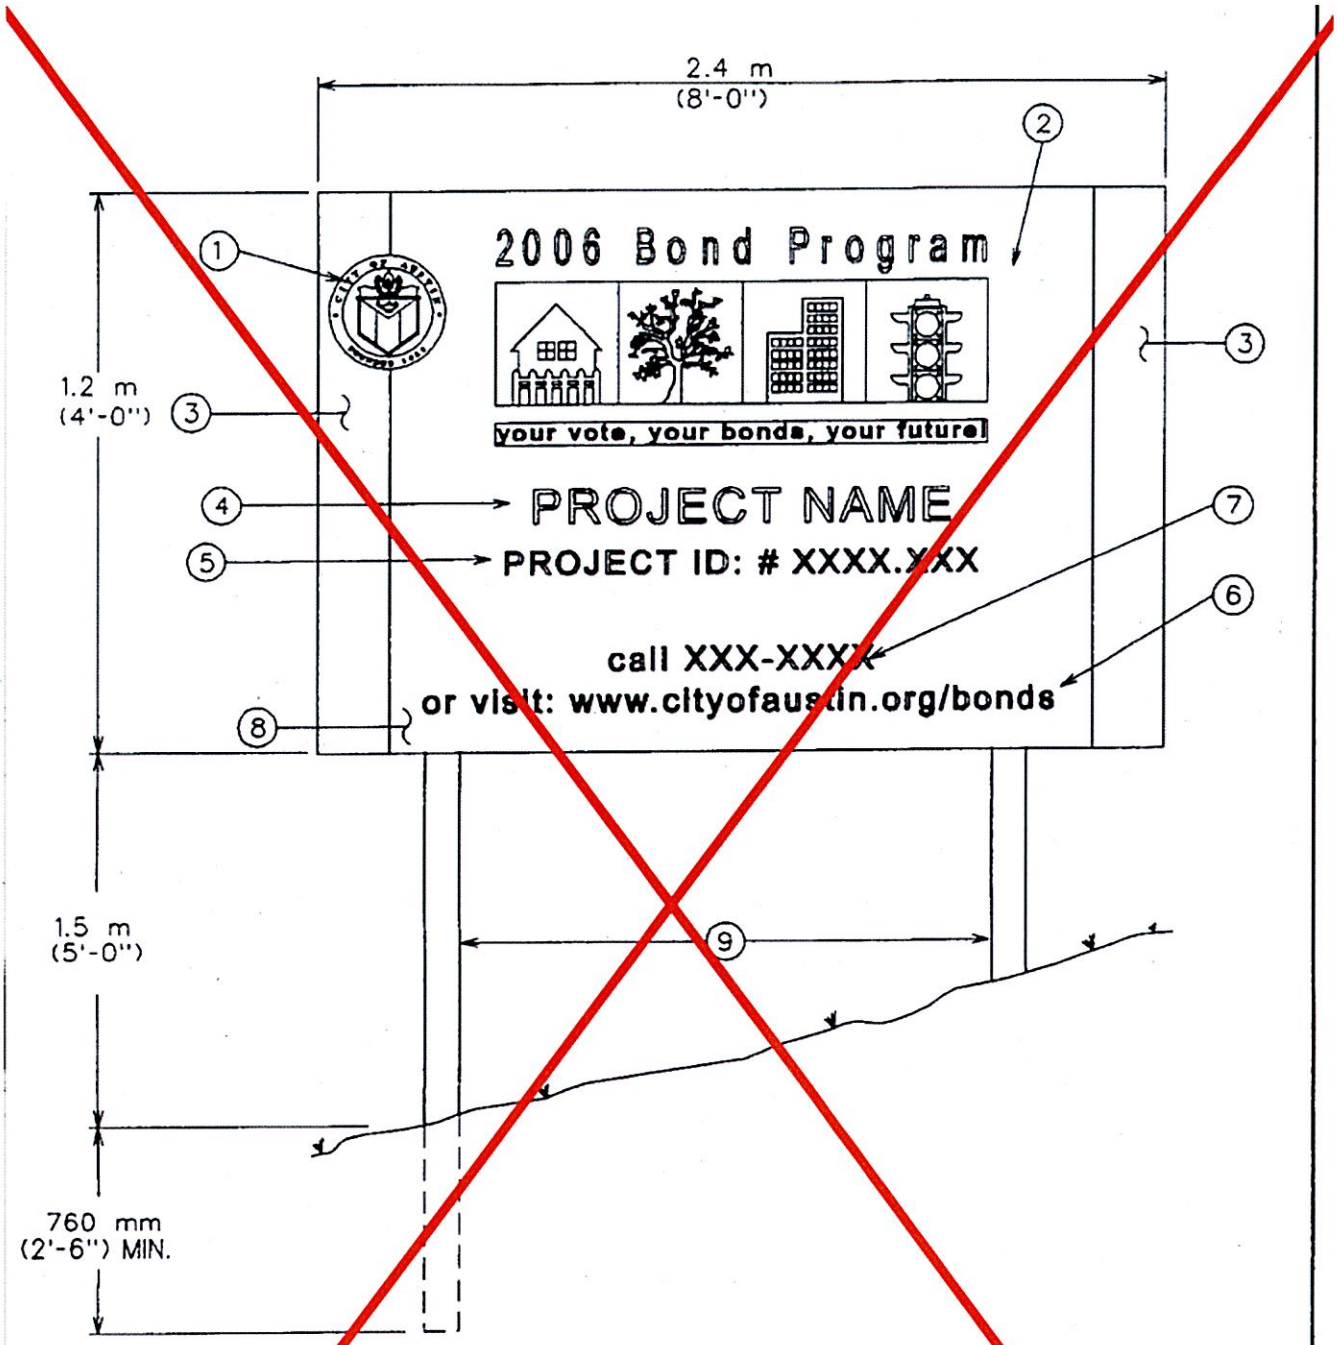

DELETE DETAIL 802S-1A

NOTES:

1. ALL MATERIALS SHALL BE FURNISHED BY THE CONTRACTOR.
2. IF SIGN IS USED IN PHASED CONSTRUCTION, POSTS SHALL BE MOUNTED ON SKIDS. SEE STANDARD 804S-5, SHEET 5 OF 13.

CITY OF AUSTIN DEPARTMENT OF PUBLIC WORKS	2.4m x1.2m (8'x4') BOND PROGRAM BUILDING PROJECT SIGN	
Bill Gardner 3/26/08 ADOPTED	THE ARCHITECT/ENGINEER ASSUMES RESPONSIBILITY FOR APPROPRIATE USE OF THIS STANDARD.	STANDARD NO. 802S-1A 1 OF 2

1. 225 mm (9") CITY SEAL
2. 750 mm X 600 mm (72" X 24") BOND PROGRAM LOGO
3. 188 mm (7.5") WIDE RED STRIPE
4. 75 mm (3") BLUE UPPER CASE LETTERS
5. 25 mm (1") BLUE UPPER CASE LETTERS
6. 25 mm (1") RED LOWER CASE LETTERS
7. 63 mm (2½") RED LOWER CASE LETTERS
8. WHITE BACKGROUND ON PLYWOOD, NON-REFLECTIVE. PAINT REQUIREMENTS FOR BACKGROUND AND POST, BLUE TONED WHITE 93-21667 CROSS ALLEN OR EQUAL.
9. 100 mm X 100 mm (4"X4") CLASS 6 WOOD POST PAINTED WHITE

DELETE DETAIL 802S-1A

CITY OF AUSTIN DEPARTMENT OF PUBLIC WORKS	2.4m x1.2m (8'x4') BOND PROGRAM BUILDING PROJECT SIGN	
Bill Andrews 3/26/08 ADOPTED	THE ARCHITECT/ENGINEER ASSUMES RESPONSIBILITY FOR APPROPRIATE USE OF THIS STANDARD.	STANDARD NO. 802S-1A 2 OF 2

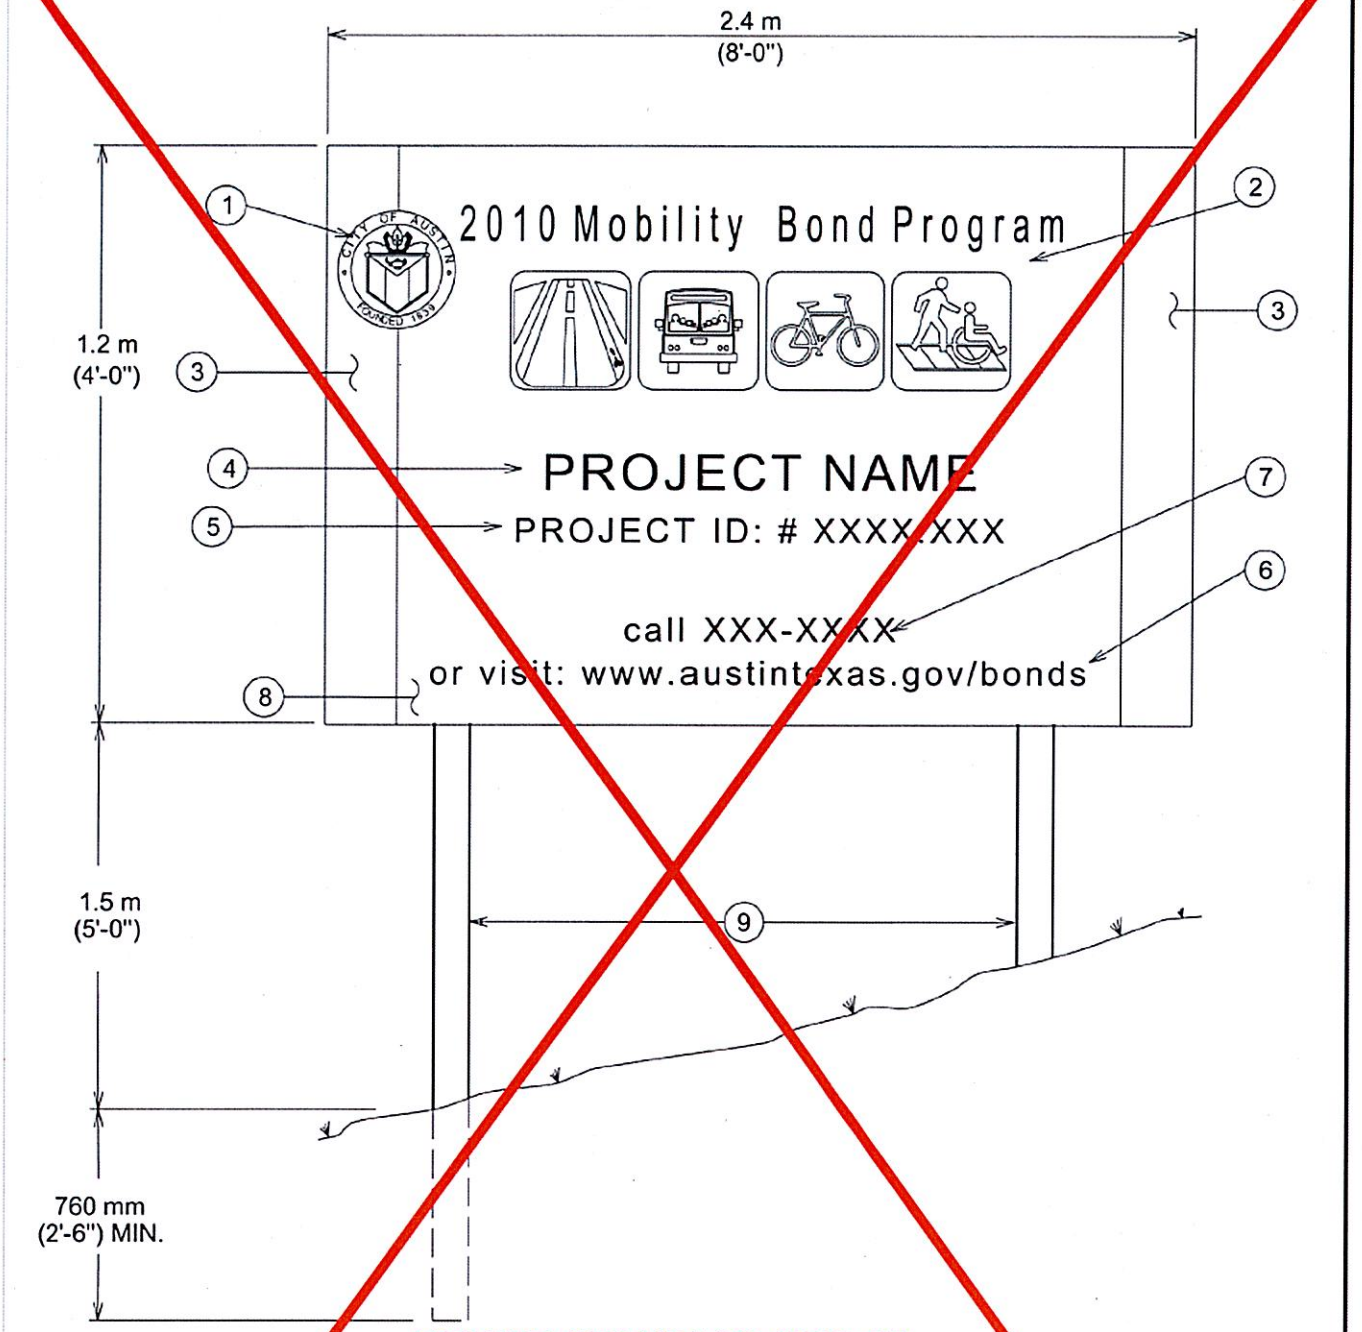

DELETE STANDARD 802S-1B

NOTES:

1. ALL MATERIALS SHALL BE FURNISHED BY THE CONTRACTOR.
2. IF SIGN IS USED IN PHASED CONSTRUCTION, POSTS SHALL BE MOUNTED ON SKIDS. SEE STANDARD 804S-5, SHEET 5 OF 13.

CITY OF AUSTIN DEPARTMENT OF PUBLIC WORKS		2.4m x1.2m (8'x4') BOND PROGRAM BUILDING PROJECT SIGN	
RECORD COPY SIGNED BY CUONG TRAN	11/15/11 ADOPTED	THE ARCHITECT/ENGINEER ASSUMES RESPONSIBILITY FOR APPROPRIATE USE OF THIS STANDARD.	STANDARD NO. 802S-1B 1 OF 2

1. 225 mm (9") CITY SEAL
2. 750 mm X 600 mm (72" X 24") BOND PROGRAM LOGO
3. 188 mm (7.5") WIDE RED STRIPE
4. 75 mm (3") BLUE UPPER CASE LETTERS
5. 25 mm (1") BLUE UPPER CASE LETTERS
6. 25 mm (1") RED LOWER CASE LETTERS
7. 63 mm (2 1/2") RED LOWER CASE LETTERS
8. WHITE BACKGROUND ON PLYWOOD, NON-REFLECTIVE. PAINT REQUIREMENTS FOR BACKGROUND AND POST, BLUE TONED WHITE 93-21667 CROSS ALLEN OR EQUAL.
9. 100 mm X 100 mm (4"X4") CLASS 6 WOOD POST PAINTED WHITE

DELETE STANDARD 802S-1B

CITY OF AUSTIN DEPARTMENT OF PUBLIC WORKS		2.4m x1.2m (8'x4') BOND PROGRAM BUILDING PROJECT SIGN	
RECORD COPY SIGNED BY CUONG TRAN	11/15/11 ADOPTED	THE ARCHITECT/ENGINEER ASSUMES RESPONSIBILITY FOR APPROPRIATE USE OF THIS STANDARD.	STANDARD NO. 802S-1B 2 OF 2

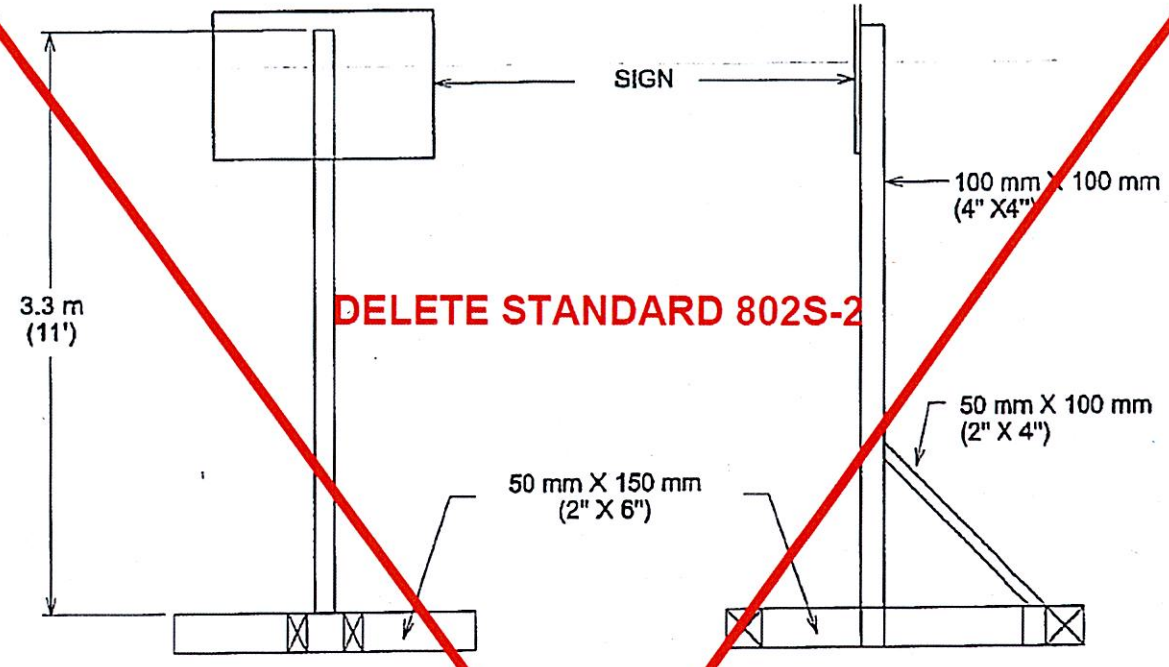

FRONT VIEW

SIDE VIEW

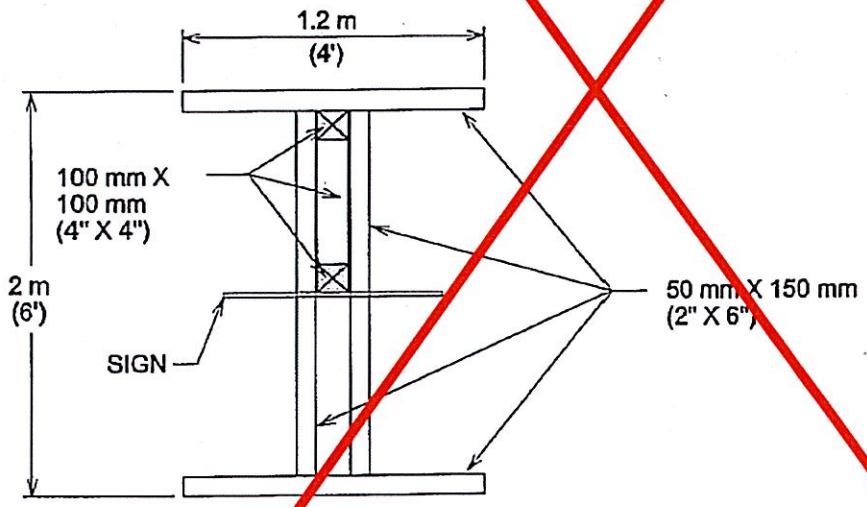

TOP VIEW

DELETE STANDARD 802S-2

NOTES:

1. ALL MATERIALS SHALL BE FURNISHED BY THE CONTRACTOR.
2. LUMBER DIMENSIONS ARE NOMINAL.
3. SIGN MUST BE IN COLOR.

CITY OF AUSTIN DEPARTMENT OF PUBLIC WORKS	600mmx900mm (24"x36") C. I. P.MOVABLE SIGN TYPE II
Luis Mendoza-Lopez 1/9/12 DATE	THE ARCHITECT/ENGINEER ASSUMES RESPONSIBILITY FOR APPROPRIATE USE OF THIS STANDARD.
	STANDARD NO. 802S-2 1 OF 2

SIGN

C.I.P. SIGN
600 mm X 900 mm
(24" X 36")

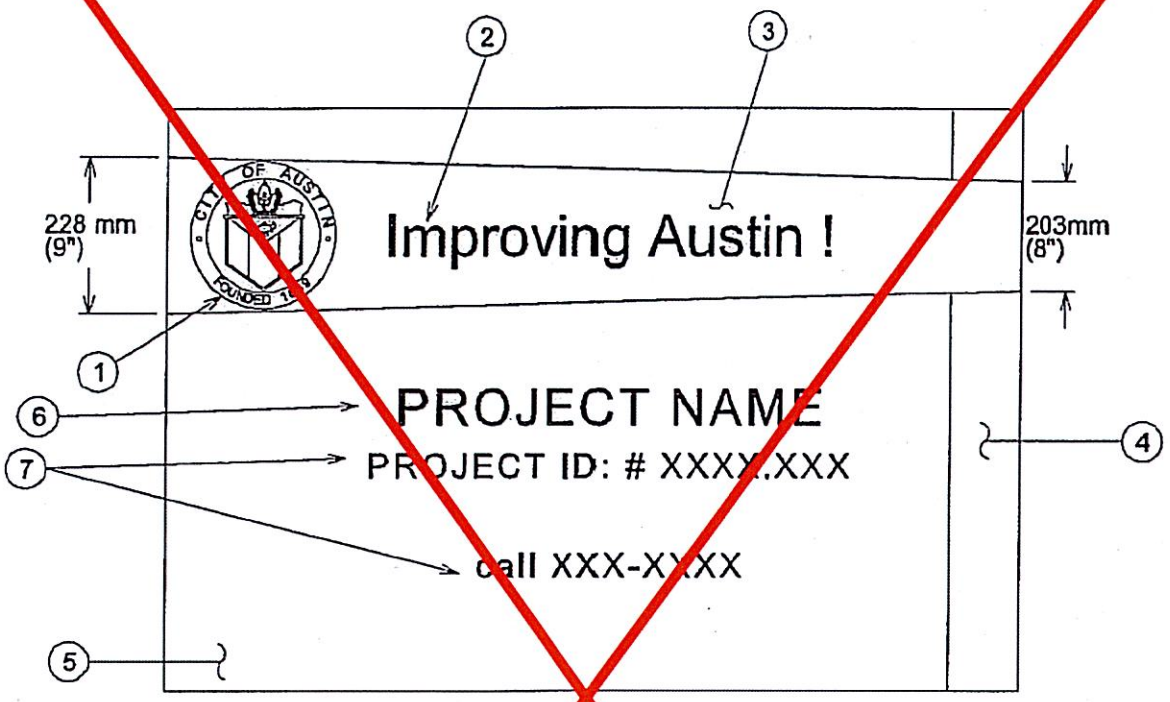

1. 225 mm (9") CITY SEAL (4 COLOR PROCESS)
2. 50 mm (2")- WHITE LETTERS
3. TRANSPARENT BLUE PAINT
4. 75 mm (3") WIDE- TRANSPARENT YELLOW PAINT STRIPE
5. HIGH INTENSITY WHITE REFLECTIVE SHEETING, .080 ALUMINUM 2290, 3M CO. OR EQUAL
6. 63 mm (2 1#2")- BLUE LETTERS
7. 25 mm (1")-BLUE LETTERS

DELETE STANDARD 802S-2

CITY OF AUSTIN DEPARTMENT OF PUBLIC WORKS	600mmx900mm (24"x36") C. I. P.MOVABLE SIGN TYPE II	
Lori Moorehead-Tracy 1/4/11 ADOPTED	THE ARCHITECT/ENGINEER ASSUMES RESPONSIBILITY FOR APPROPRIATE USE OF THIS STANDARD.	STANDARD NO. 802S-2 2 OF 2

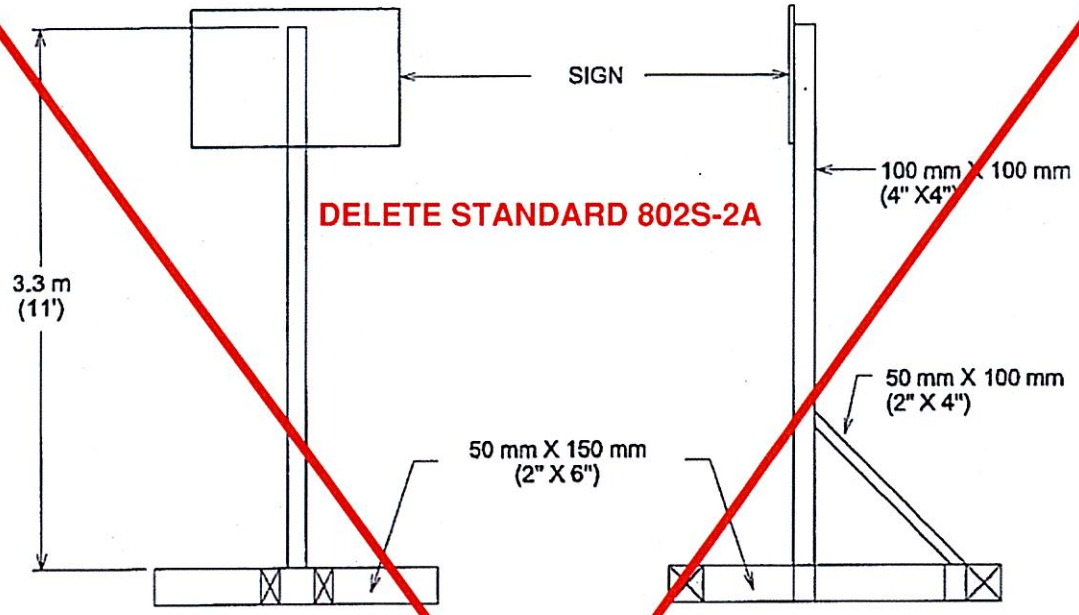

FRONT VIEW

SIDE VIEW

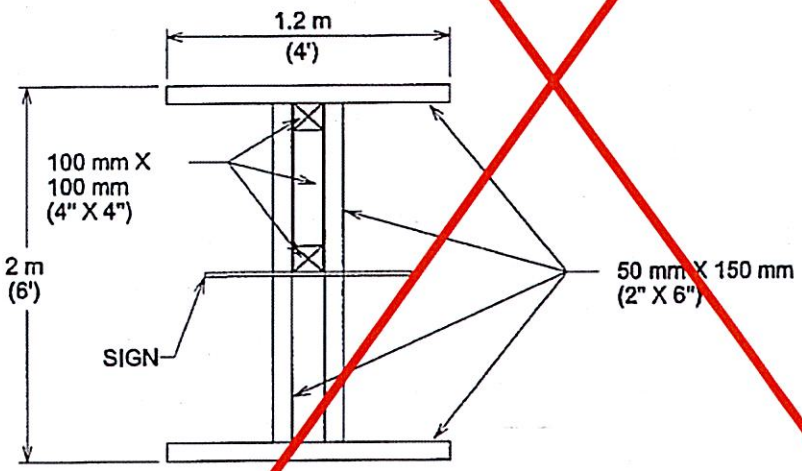

TOP VIEW

DELETE STANDARD 802S-2A

NOTES:

1. ALL MATERIALS SHALL BE FURNISHED BY THE CONTRACTOR.
2. LUMBER DIMENSIONS ARE NOMINAL.
3. SIGN MUST BE IN COLOR.

CITY OF AUSTIN DEPARTMENT OF PUBLIC WORKS	600mm x 900mm (24"x36") JOINT C. I. P. MOVABLE SIGN TYPE II	
1/4/11 ADOPTED	THE ARCHITECT/ENGINEER ASSUMES RESPONSIBILITY FOR APPROPRIATE USE OF THIS STANDARD.	STANDARD NO. 802S-2A 1 OF 2

SIGN

C.I.P. SIGN
600 mm X 900 mm
(24" X 36")

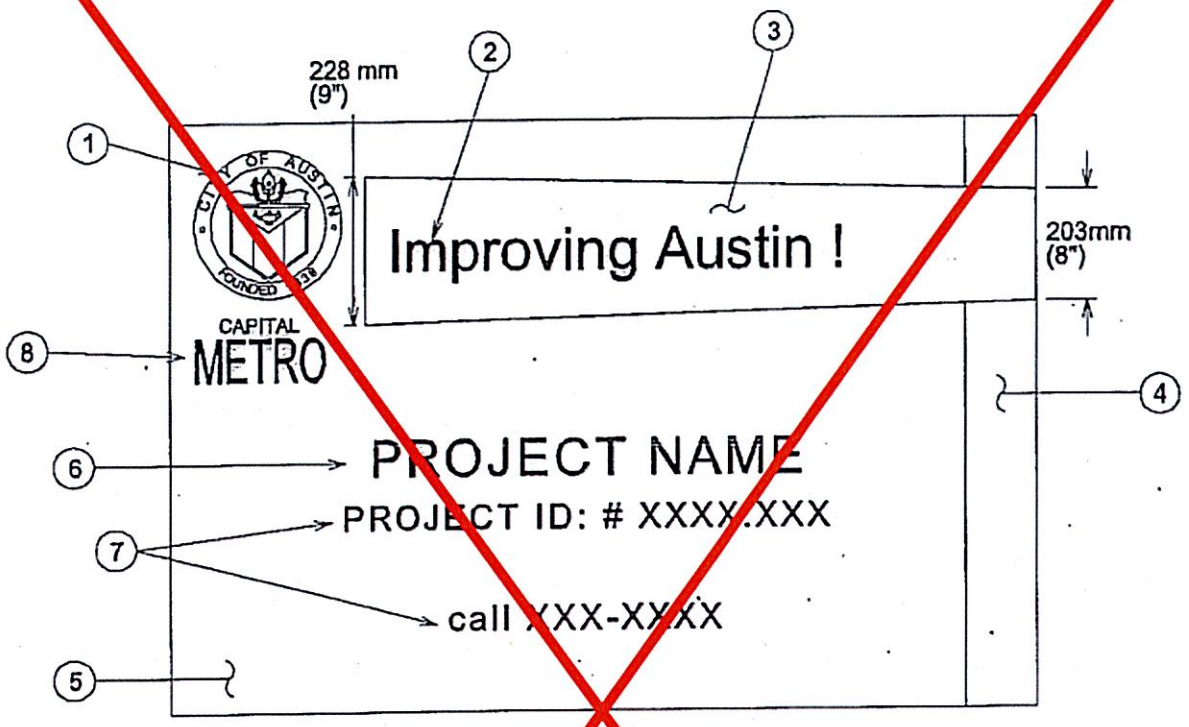

1. 225 mm (9") CITY SEAL (4 COLOR PROCESS)
2. 50 mm (2")- WHITE LETTERS
3. TRANSPARENT BLUE PAINT
4. 75 mm (3") WIDE- TRANSPARENT YELLOW PAINT STRIPE
5. HIGH INTENSITY WHITE REFLECTIVE SHEETING, .080 ALUMINUM 2290, 3M CO. OR EQUAL
6. 63 mm (2 1/2")- BLUE LETTERS
7. HIGH INTENSITY WHITE REFLECTIVE SHEETING, .080 ALUMINUM 2290, 3M CO. OR EQUAL
8. 150 mm X 100 mm (6"X4") CAPITAL METRO LOGO (BLUE LETTERS, PMS 295 OR EQUAL)

DELETE STANDARD 802S-2A

CITY OF AUSTIN DEPARTMENT OF PUBLIC WORKS	600mm x 900mm (24"x36") JOINT C. I. P. MOVABLE SIGN TYPE II
1/4/11 ADOPTED	THE ARCHITECT/ENGINEER ASSUMES RESPONSIBILITY FOR APPROPRIATE USE OF THIS STANDARD.

STANDARD NO.
802S-2A
3 OF 3

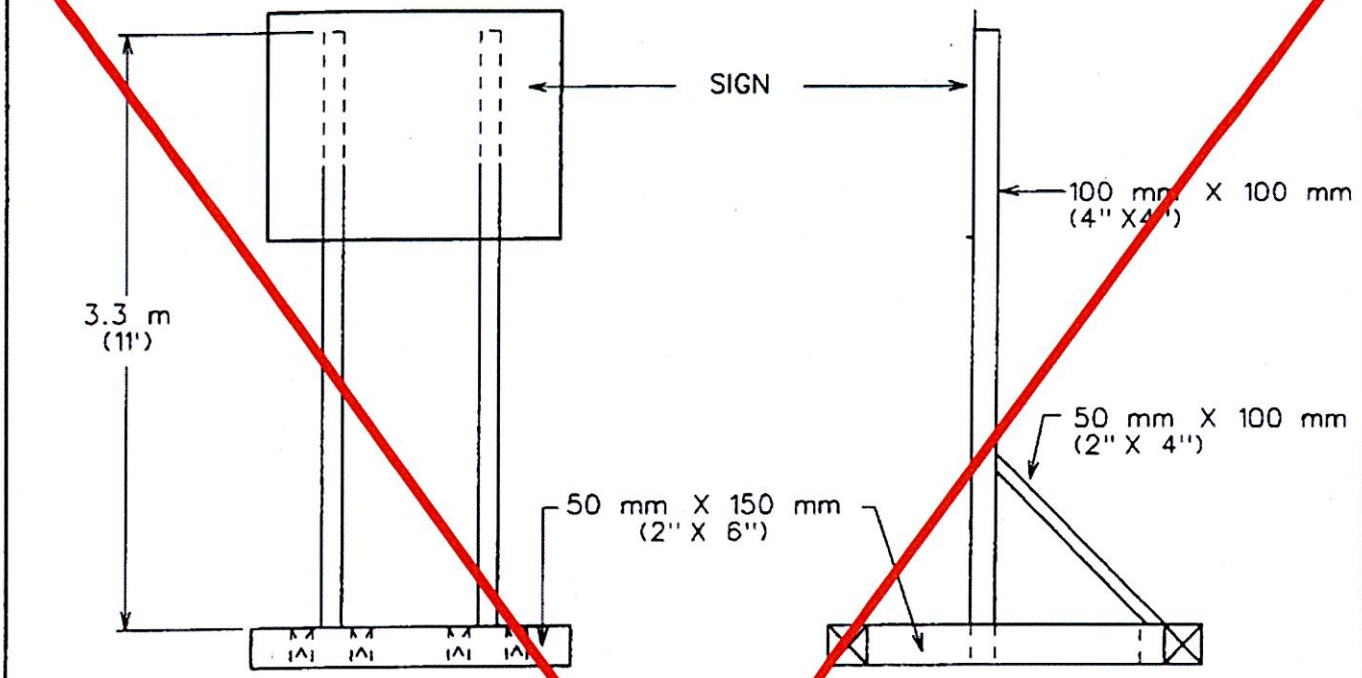

FRONT VIEW

SIDE VIEW

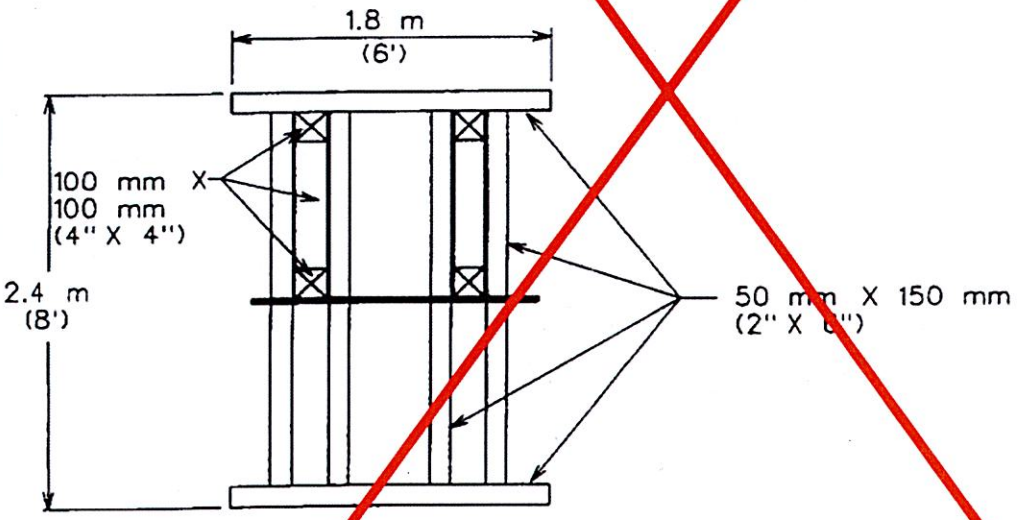

TOP VIEW

DELETE STANDARD 802S-2B

NOTES:
1. ALL MATERIALS SHALL BE FURNISHED BY THE CONTRACTOR.
2. LUMBER DIMENSIONS ARE NOMINAL.

CITY OF AUSTIN DEPARTMENT OF PUBLIC WORKS	900mmX1.2m (36"X48") BOND PROGRAM PROJECT MOVABLE SIGN TYPE II
Bill Gardner 3/26/08 DATE	THE ARCHITECT/ENGINEER ASSUMES RESPONSIBILITY FOR APPROPRIATE USE OF THIS STANDARD.
	STANDARD NO. 802S-2B 2 OF 2